



轨装接线端子选型手册  
RAIL-MOUNTED TERMINAL BLOCK



PCB连接器及端子选型手册  
PCB CONNECTORS AND TERMINAL BLOCKS




工业开关选型手册  
INDUSTRIAL SWITCH

轨装接线端子选型手册

RAIL-MOUNTED TERMINAL BLOCK

V2.3II

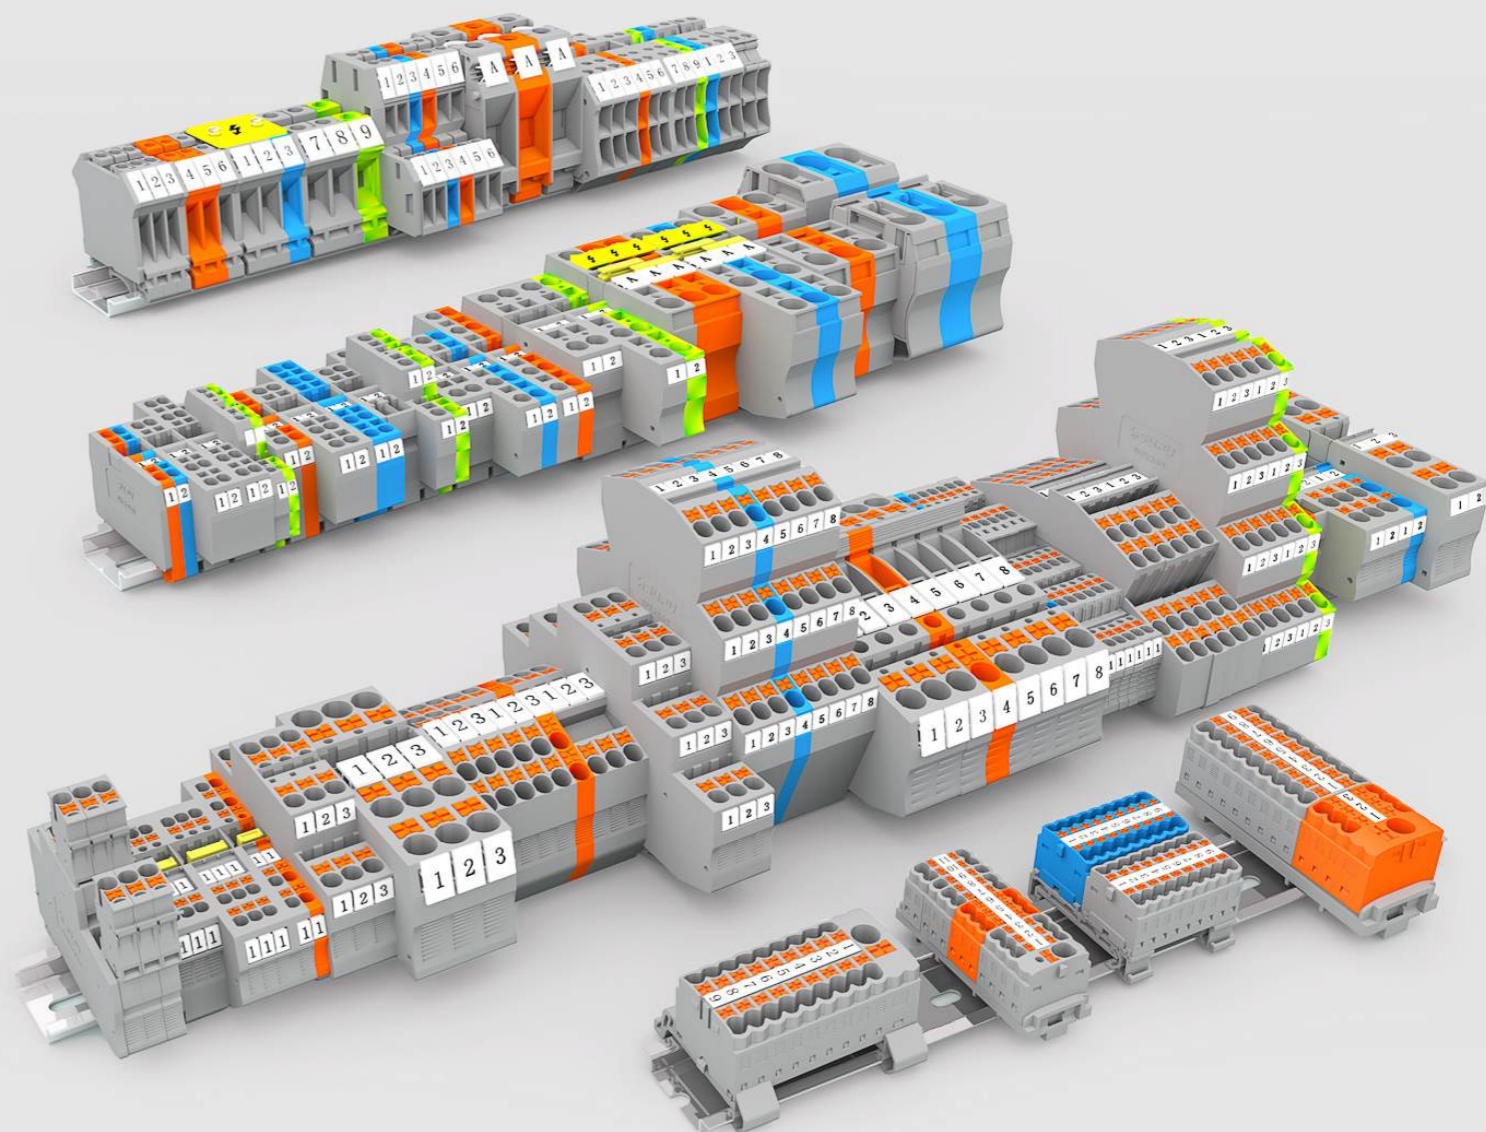

圆形连接器选型手册  
CIRCULAR CONNECTOR BLOCK



接口模块选型手册  
INTERFACE MODULE



定制部件选型手册  
CUSTOMERIZED PARTS



宁波速普电子有限公司  
NINGBO SUPU ELECTRONICS CO.,LTD.

地址 | 浙江省慈溪市高新技术产业开发区新兴四路150号  
Add | #150,Xinxing No.4 Rd, High-tech Zone ,Cixi, Zhejiang,China.  
P.C. | 315303  
Service Hotline | 400-626-6336  
Tel | 0574-63288158  
Fax | 0574-63288170  
E-mail | askme@supu.cn  
Http | www.supu.com.cn



V2.3II

轨装接线端子选型手册  
RAIL-MOUNTED TERMINAL BLOCK



宁波速普电子成立于1999年，现有电连接器、工业开关、电子产品、定制化产品四大业务版块，是一家集研发、生产、销售、服务于一体的电气产业全球优秀供应商。

速普产品包括轨装接线端子、PCB连接器、工业开关、圆形连接器、重载连接器、接口模块等。公司产品已通过CQC、UL、VDE、TUV、CE、ROHS、REACH等多项认证。公司已通过ISO9001、ISO14001、ISO/TS22163和IATF16949等管理体系认证。

速普产品广泛应用于电梯、电力、轨道交通、工业自动化、新能源、照明、船舶、仪器仪表、机械设备等领域。自公司创立以来，秉承产品创新与科技前瞻的精神，建立了先进的技术研发中心，已获得国家高新技术企业、国家专精特新小巨人企业、宁波工程技术中心等多项荣誉。

在提供标准产品外，同时为客户带去定制化产品解决方案，有效满足客户个性化需求。速普建立了完善的全球销售网络，产品畅销中国、俄罗斯、德国、西班牙、美国、巴西、日本等100多个国家和地区。

Ningbo Supu Electronics Co., Ltd. was established in 1999, which has been a collection of R&D, production, sales, service in one of the world's outstanding suppliers of electrical industry, with four business sections: electrical connector, industrial switch, electronic products, and customized components.

Supu products include Rail-mounted terminals, PCB connectors, Industrial switches, Circular connectors, Heavy-duty connectors, Interface modules, etc. which have passed CQC, UL, VDE, TUV, CE, ROHS, REACH and other certifications. The company has passed ISO9001, ISO14001, ISO/TS22163 and IATF16949 management system certification.

Supu products are widely used in elevator, electric power, rail transit, industrial automation, new energy, lighting, ships, instruments, mechanical equipment and other fields. Since its establishment, adhering to the spirit of product innovation and technological foresight, the company has established an advanced technology research and development center, which has won many honors such as National High-tech Enterprise, National Specialized and New Small Giant Enterprise, Ningbo Engineering Technology Center, etc.

In addition to providing standard products, Supu also bring customized product solutions to effectively meet customers' personalized needs. Supu has established a perfect global sales network, and its products sell well in more than 100 countries and regions such as China, Russia, Germany, Spain, the United States, Brazil, Japan, etc.

**使命 Mission**

追求全体员工物质和精神两方面的幸福，提升企业价值，  
为人类和社会进步与发展做出贡献  
Pursuit happiness of all staff in material & spiritual,  
promote the enterprise value, contribute to the progress  
& development for human & society



**愿景 Corporation Vision**

成为全球电气产业经营典范  
To be the model of the global electric industry




**核心价值观 Core Values**

勤奋、创新、内求、利他  
Diligence, Innovative, Self-seeking, Altruism



**质量方针 Quality Policy**

追求全程精益品质 持续改进 超越顾客期望 打造行业品牌  
To pursuit full lean quality Continuous improvement Exceed  
customers expectations Build industry brand

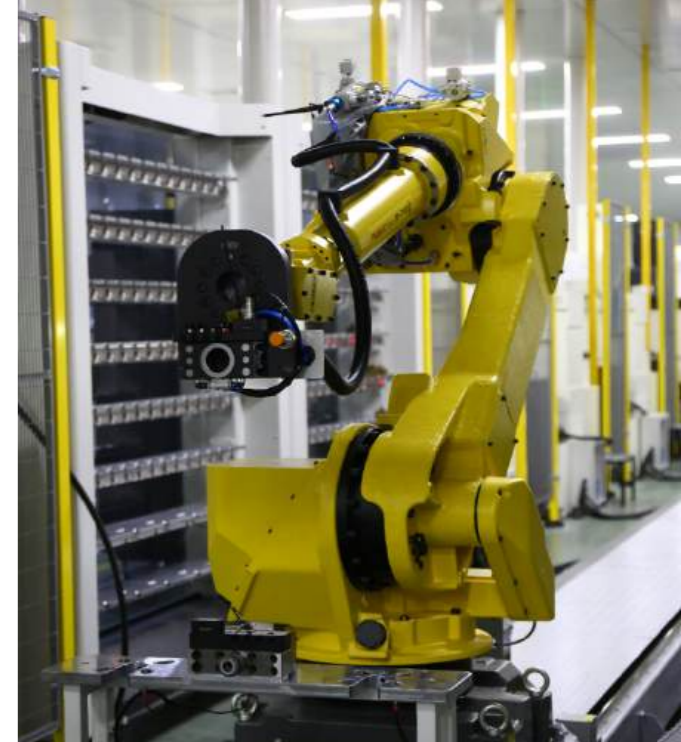

**2023新启航 New sail in 2023**



开启新征程，共创新辉煌  
New journey, New success.  
——系统性目标管理，数字化高效运营，打造坚实经营体质  
—— Systematic target management,  
Digital and efficient operation,  
To create a solid management constitution.



TP系列弹簧接线端子 TP Rail-mounted Terminal Blocks With Spring-cage Clamp

P10-P12 一进一出接线端子 1-1 Feed Through Terminal Block	
P12-P14 一进两出接线端子 1-2 Feed Through Terminal Block	
P15-P16 两进两出接线端子 2-2 Feed Through Terminal Block	
P17-P19 一进一出接地端子 1-1 Through Ground Terminal Block	
P19-P21 一进两出接地端子 1-2 Through Ground Terminal Block	
P22-P23 两进两出接地端子 2-2 Through Ground Terminal Block	
P24-P26 2.5mm² 斜面 Angled	
P27-P30 双层接线端子 Double Level Terminal Block	
P31-32 双层接地端子 Double Level Ground Terminal Block	
P33-P34 斜面双层八线 Double level angled type 8-wire	
P35-P37 2.5mm² 三层接线端子 Triple Level Terminal Block	

P37-P38 2.5mm² 四层斜面接线端子 Quadruple level angled type terminal block	
P39-P41 2.5mm² 三层接地端子 Triple Level Ground Terminal Block	
P42-P43 针脚式接线端子 Pin type wiring terminal blocks	
P44 针脚式接地端子 Pin type Ground Terminal Block	
P45 插头 Plug	
P47-P48 一进一出直插式微型 1-1 Push-in mini-type	
P49-P50 TPIO 系列 TPIO Series	
P51-P56 功能型接线端子 Functional terminal blocks	
P57 35 mm² 电位分配接线端子 Potential distribution terminal block	
P58 直插式配电块 Push-in Type Power Distribution Block	
P59 直插式带输入配电块 Push-in Type Power Distribution Block Terminal Points	

<p>P61 一进一出侧面接线端子 1-1 Feed Through Terminal Block of Side-entry</p>	 <p>TPV2.5-2 TPV4-2 TPV6-2</p>
<p>P62 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry</p>	 <p>TPV2.5-2-PE TPV4-2-PE TPV6-2-PE</p>

TAPO 大电流系列 TAPO High Current Series

<p>P64-P66 大电流系列 High Current Series</p>	 <p>TAPO35-2 TAPO50-2 TAPO95-2 TAPO35-2-PE TAPO50-2-PE TAPO95-2-PE</p>
--	--

TC系列弹簧接线端子 TC Rail-mounted Terminal Blocks With Spring-cage Clamp

<p>P69-P71 一进一出接线端子 1-1 Feed Through Terminal Block</p>	 <p>TC1.5-2 TC2.5-2 TC4-2 TC6-2 TC10-2 TC16-2 TC35-2</p>
<p>P72-P74 一进一出接地端子 1-1 Feed Through Ground Terminal Block</p>	 <p>TC1.5-2-PE TC2.5-2-PE TC4-2-PE TC6-2-PE TC10-2-PE TC16-2-PE TC35-2-PE</p>
<p>P75-P76 一进两出接线端子 1-2 Feed Through Terminal Block</p>	 <p>TC1.5-3 TC2.5-3 TC4-3 TC6-3 TC10-3</p>
<p>P77-P78 一进两出接地端子 1-2 Feed Through Ground Terminal Block</p>	 <p>TC1.5-3-PE TC2.5-3-PE TC4-3-PE TC6-3-PE TC10-3-PE</p>
<p>P79-P80 两进两出接线端子 2-2 Feed Through Terminal Block</p>	 <p>TC1.5-4 TC2.5-4 TC4-4</p>
<p>P81-P82 两进两出接地端子 2-2 Feed Through Ground Terminal Block</p>	 <p>TC1.5-4-PE TC2.5-4-PE TC4-4-PE</p>
<p>P83-P84 两进两出分断式接线端子 2x2 Feed Through Disconnect Terminal Block</p>	 <p>TC1.5-2X2 TC2.5-2X2 TC4-2X2</p>

<p>P85-P86 双层接线端子 Double Level Terminal Block</p>	 <p>TCD1.5-2 TCD1.5-2-PV TCD2.5-2 TCD2.5-2-PV</p>
<p>P87 双层等电位接地端子 Double Level With Equipotential Bonding Ground Terminal Block</p>	 <p>TCD1.5-2-PE TCD2.5-2-PE</p>
<p>P88-P89 2.5mm² 插拔接线端子 Plug-in Terminal Block</p>	 <p>TC2.5-2-1 TCD2.5-2-1 TCD2.5-2-1-PV</p>
<p>P89-P90 2.5mm² 插拔接地端子 Ground Plug-in Terminal Block</p>	 <p>TC2.5-2-1-PE TCD2.5-2-1-PE</p>
<p>P91 2.5mm² 插头 Plug</p>	 <p>TCP2.5-1 TCPB2.5-1 TCPDB2.5-1</p>
<p>P92 功能型接线端子 Functional terminal blocks</p>	 <p>TC4-FUSE-BK TC4-FUSELED24-BK TC4-SPLIT</p>

















































TU系列螺钉接线端子 TU Rail-mounted Terminal Blocks With Screw Clamp

<p>P95-P99 一进一出接线端子 1-1 Feed Through Terminal Block</p>	 <p>TU2.5-2 TU4-2 TU6-2 TU10-2 TU16-2 TU35-2 TU50-2</p>
<p>P99-P100 一进两出接线端子 1-2 Feed Through Terminal Block</p>	 <p>TU70-2 TU95-2 TU150-2 TU240-2</p>
<p>P99-P100 一进两出接线端子 1-2 Feed Through Terminal Block</p>	 <p>TU2.5-3 TU4-3</p>
<p>P100 两进两出接线端子 2-2 Feed Through Terminal Block</p>	 <p>TU2.5-4 TU4-4</p>
<p>P101-P104 一进一出接地端子 1-1 Feed Through Ground Terminal Block</p>	 <p>TU2.5-2-PE TU4-2-PE TU6-2-PE TU10-2-PE TU16-2-PE TU35-2-PE TU50-2-PE TU70-2-PE TU95-2-PE</p>








P104-105 一进两出接地端子 1-2 Feed Through Ground Terminal Block	 	TU2.5-3-PE TU4-3-PE
P105-106 两进两出接地端子 2-2 Feed Through Ground Terminal Block	 	TU2.5-4-PE TU4-4-PE
P107-P108 双层接线端子 Double Level Terminal Block	   	TUD2.5-2 TUD2.5-2-PV TUD4-2 TUD4-2-PV
P109 双层接地端子 Double Level Ground Terminal Block	 	TUD2.5-2-PE TUD4-2-PE
P110 带保险管接线端子 Terminal block with protective tube	  	TU4-HESI TU4-HESILED24-GY TU10-NF(5X20)
P111 4mm²悬臂式保险管接线端子 4mm²Lever-type fuse terminal block	 	TU4-FUSE-BK TU4-FUSELED24-BK
P112 4mm²分断式接线端子 4mm² Disconnect terminal block	  	TU4-MT TU4-TG TU4-SPLIT

TA系列弹簧接线端子 TA Rail-mounted Terminal Blocks With Spring-cage Clamp


P115-P117 一进一出接线端子 1-1 Feed Through Terminal Block	     	215921 225921 204921 206921 210921 216921
P118-P120 一进一出接地端子 1-1 Feed Through Ground Terminal Block	     	215927 225927 204927 206927 210927 216927
P121-P122 一进一出接线端子 (侧面标记) 1-1 Feed Through Terminal Block (Side Marking)	  	206911 210911 216911
P123-P124 一进一出接地端子 (侧面标记) 1-1 Feed Through Ground Terminal Block (Side Marking)	  	206917 210917 216917

P125-P126 一进一出侧面接线端子 1-1 Feed Through Terminal Block of Side-entry	    	225915 204901 206901 210901 216901
P1270-P128 一进一出侧面接地端子 1-1 Feed Through Ground Terminal Block of Side-entry	    	225917 204907 206907 210907 216907
P129-P131 一进两出接线端子 1-2 Feed Through Terminal Block	     	215951 225951 204951 206951 210951 216951
P132-P134 一进两出接地端子 1-2 Feed Through Ground Terminal Block	     	215957 225957 204957 206957 210957 216957
P135-P136 两进两出接线端子 2-2 Feed Through Terminal Block	    	215931 225931 204931 215901 225901
P137-P138 两进两出接地端子 2-2 Feed Through Ground Terminal Block	  	215947 225947 204947
P139-P141 两进两出分断式接线端子 2-2 Feed Through Terminal Block With Interrupted Power Rail	     	215936 225936 204936 215903 225903 225908
P142-P143 一进两出斜面接线端子 1-2 Feed Through Angled Type Terminal Block	  	225961 204961 225965
P144 一进两出斜面接地端子 1-2 Feed Through Ground Angled Type Terminal Block	 	225964 204964
P145-P148 一针一线插拔式端子 1-1 Feed Through Pluggable Terminal Block	     	2150-1201 225981 2150-1401 2150-1207 225987 2150-1407
P148 插头 Plug		2150-101

UK系列螺钉接线端子 UK Rail-mounted Terminal Blocks With Screw Clamp

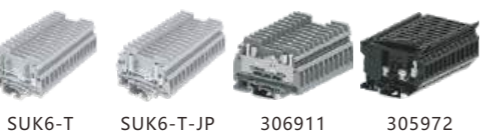



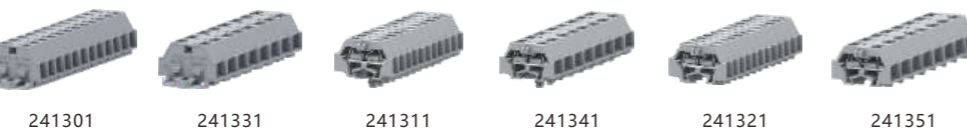









P151-P155 UK接线端子 UK Terminal Block	 <p>301901 302901 303901 305901 306901 310901 316901 335901 350901</p> <p>370901 395901</p>
P156 UK二进二出接线端子 1-1 Feed Through Terminal Block	 <p>303941 305941</p>
P157-P160 UK接地端子 UK Ground Terminal Block	 <p>302903 303903 305903 306903 310903 316903 335903 350903</p>
P161-P163 SUK接线端子 SUK Terminal Block	 <p>302991 303991 305991 306991 310991 316991 335991</p>
P164-P166 SUK接地端子 SUK Ground Terminal Block	 <p>306993 306993 310993 316993 335993 302993 303993</p>
P167-P168 UKD 接线端子 UKD Terminal Block	 <p>303921 305921 305921-PV 310921 310921-PV</p>
P169-P170 分断测试 test terminal	 <p>SUK6-T SUK6-T-JP 306911 305972</p>

TB系列微型弹簧接线端子 TB Rail-mounted Miniature Terminal Blocks

P173-P175 240系列侧面接线端子 240 With Fixing Flanges of Side-entry	 <p>240301 240331 240311 240341 240321 240351</p>
P176-P178 241系列侧面接线端子 241 With Fixing Flanges of Side-entry	 <p>241301 241331 241311 241341 241321 241351</p>

P179-P181 242系列侧面接线端子 242 With Fixing Flanges of Side-entry	 <p>242301 242331 242311 242341 242321 242351</p>
P182-P184 254系列正面接线端子 254 With Fixing Flanges of Front-entry	 <p>254301 254331 254311 254341 254321 254351</p>
P185-P187 254系列正面端子 254 Serie Front-entry	 <p>254361 254391 254371 254381 254507 254607</p>

附件 Accessory


P189-P190 终端固定器 End Clamp	 <p>215201</p>	P198 TB系列跨接桥 TB Jumper	 <p>240601</p>
P190 终端标识牌 End clamp marking	 <p>215214</p>	P198 导轨终端固定件 Rail end cap	 <p>920001</p>
P191 导轨转换器 Rail transf	 <p>254611</p>	P199 测试插头 Test Plug	 <p>TP1.5-DP</p>
P192 分阻隔片 Partition plate	 <p>ATP-TU</p>	P199-P200 导轨 Rails	 <p>900421/011</p>
P193 保护盖板 Protection cover	 <p>900611</p>	P200-P201 弹簧接线端子专用工具 Special tools for spring terminal blocks	 <p>910111</p>
P193-P194 TP/TU/TC系列跨接桥 TP/TU/TC Jumper	 <p>TJA3.5</p>	P201-P203 标记牌 Marker card	 <p>TMBW5.2-96</p>
P195-P196 TA系列跨接桥 TA Jumper	 <p>215301</p>		
P196-P197 UK系列跨接桥 UK Jumper	 <p>302302</p>		

## TP系列弹簧接线端子

### TP Rail-mounted Terminal Blocks With Spring-cage Clamp


TP系列弹簧接线端子采用直插式弹簧接线技术，无需借助特定工具即可完成导线的快速连接，适于各种操作场合。该产品最突出的优点在于操作简便，无需使用特定接线工具，大大减小插入力。产品设计制造符合IEC/EN60947、UL1059等相关国际标准。

TP series adopt the push-in type spring cage connection technology, can finish the quick wiring without any special tool, can be operated in different environments. The most advantage for this series is convenient operation, on need to use wiring tool, also greatly deduct the insert force. The products have the international standards including IEC/EN60947, UL1059 ect.

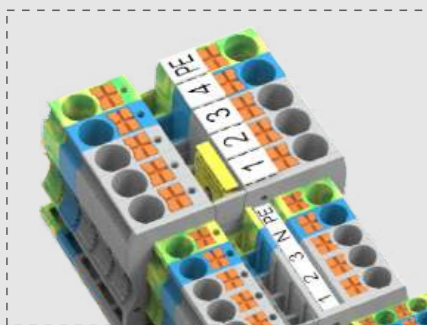


▲ 带辅助按键，无需特定工具，不接触带电部件

▲ With the press key, no special tools are required and no live parts are touched

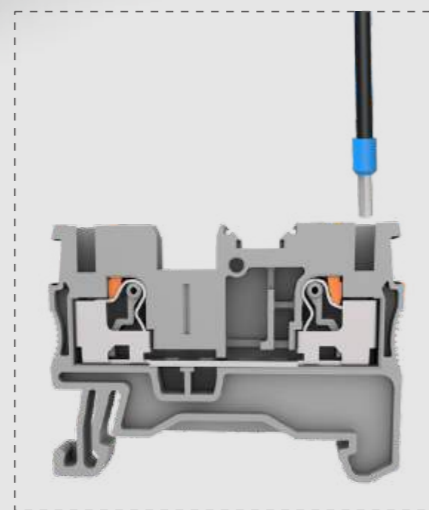

▲ 线径0.2mm<sup>2</sup>以上的刚性导线或带0.34mm<sup>2</sup>以上冷压头的导线可直接接入

▲ The solid wire  $\geq 0.25\text{mm}^2$  and the wire with ferrule  $\geq 0.34\text{mm}^2$  can be inserted directly

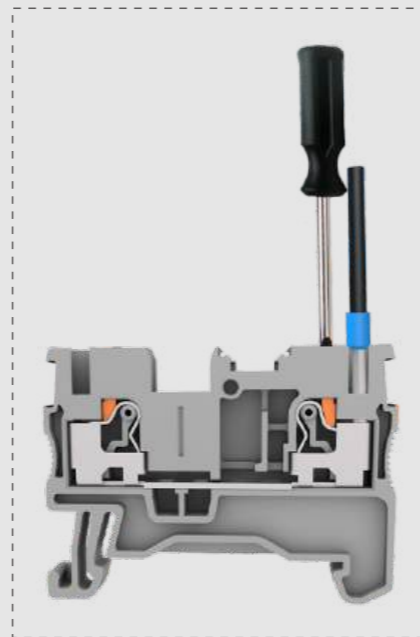


▲ 按下辅助按键，即可退线

▲ Removing the conductor via the press key

## TP系列弹簧接线端子

### TP Rail-mounted terminal blocks with spring-cage clamp



#### 1.5mm<sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block

##### 技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height	
3.5	48	30.5	
IEC	UL		
额定电压Rated Voltage [V]	500	300	
额定电流Rated Current [A]	17.5	15	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Ferrule
[mm <sup>2</sup> ]	0.2-1.5	0.2-1.5	0.2-1.0
[AWG]	26-14	26-14	26-14
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
	V0		
剥线长度Strip length [mm]	8-10		

##### 订货信息Order Information

产品Product	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray 橙Orange 蓝Blue

盖板Cover Plate	厚度2.2mm Thickness2.2mm
	灰Gray 橙Orange 蓝Blue
补偿盖板Compensatory Plate	厚度1.00mm Thickness1.00mm
	灰Gray
跨接件Jumper	位数Poles No.
	颜色Colour
	2 黄Yellow
	3 黄Yellow
	... 黄Yellow
	10 ...
	... (10位以上整数位) 黄Yellow
	50 黄Yellow

闪电图形Front Marker	正面标记Front Marker
5PCS 5片一条	10位PCS
卷带标记 (50米一卷) Winding marking (50 meters/roll)	正面标记和侧面标记Front And Side Marker
	可提供印字服务Printing Service

配套附件Accessory	订货号Order NO.	
TP1.5-2-GY	TP1.5-2-OG	TP1.5-2-BU
TP1.5-2-GY-EA	TP1.5-2-OG-EA	TP1.5-2-BU-EA
TJA3.5-2	TJA3.5-3	TJA3.5-10
TJA3.5-50	WS-TP1.5-5	TMZ9.6-50
TMB3.5-100		

#### 2.5mm<sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block

##### 技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height	
5.2	48.2	35.2	
IEC	UL		
额定电压Rated Voltage [V]	800	600	
额定电流Rated Current [A]	24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Ferrule
[mm <sup>2</sup> ]	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12	26-12
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
	V0		
剥线长度Strip length [mm]	8-10		



##### 订货信息Order Information

产品Product	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray 橙Orange 蓝Blue

盖板Cover Plate	厚度2.2mm Thickness2.2mm
	灰Gray 橙Orange 蓝Blue
补偿盖板Compensatory Plate	厚度1.00mm Thickness1.00mm
	灰Gray
跨接件Jumper	位数Poles No.
	颜色Colour
	2 黄Yellow
	3 黄Yellow
	... 黄Yellow
	10 ...
	... (10位以上整数位) 黄Yellow
	50 黄Yellow





配套附件Accessory	订货号Order NO.	
TP2.5-2-GY	TP2.5-2-OG	TP2.5-2-BU
TP2.5-2-GY-EA	TP2.5-2-OG-EA	TP2.5-2-BU-EA
TJA5.2-2	TJA5.2-3	TJA5.2-10
TJA5.2-50	WS-TP2.5-5	TMZ9.6-50
TMB5.2-120		



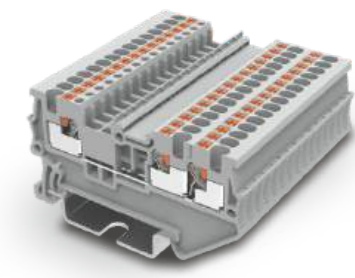



	4mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block			6mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	6.2	54.9	35.5	8.2	58	42.2
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage	800	600		1000	600	
额定电流Rated Current	32	30		41	40	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
	24-10	24-10	24-10	20-8	20-8	20-8
其余参数Other Parameters	V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	10-12			10-12		
剥线长度Strip length						
产品Product	颜色Colour			订货信息Order Information		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	订货号Order NO.		灰Gray	订货号Order NO.	
	橙Orange	TP4-2-GY		橙Orange	TP6-2-GY	
	蓝Blue	TP4-2-OG		蓝Blue	TP6-2-OG	
		TP4-2-BU			TP6-2-BU	
端板Cover Plate	配套附件Accessory			配套附件Accessory		
厚度2.2mm Thickness2.2mm	灰Gray	订货号Order NO.		灰Gray	订货号Order NO.	
	橙Orange	TC4-2-GY-EA		橙Orange	TP6-2-GY-EA	
	蓝Blue	TC4-2-OG-EA		蓝Blue	TP6-2-OG-EA	
		TC4-2-BU-EA			TP6-2-BU-EA	
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*		灰Gray	*	
跨接件Jumper	订货号Order NO.			订货号Order NO.		
位数Poles No.	颜色Colour	订货号Order NO.		颜色Colour	订货号Order NO.	
2	黄Yellow	TJA6.2-2		黄Yellow	TJA8.2-2	
3	黄Yellow	TJA6.2-3		黄Yellow	TJA8.2-3	
...	黄Yellow	.....		...	.....	
10	黄Yellow	TJA6.2-10		10	TJA8.2-10	
... (10位以上整数位)	黄Yellow	*		...	*	
50	黄Yellow	*		50	*	
闪电标记Front Marker	订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP4-5			WS-TP6-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.		
10位PCS	306801			308801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB6.2-100			TMB8.2-50		

	10mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block			16mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block			1.5mm <sup>2</sup> 一进两出接线端子 1-2 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
10.2	67.7	49.6	12.2	75.4	52.6	3.5	57.1	30.5	
IEC	UL		IEC	UL		IEC	UL		
1000	600		1000	600		500	300		
57	60		76	85		17.5	15		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.5-16	0.5-10	0.5-10	0.5-25	0.5-16	0.5-16	0.2-1.5	0.2-1.5	0.2-1.0	
20-6	20-6	20-6	20-4	20-04	20-4	26-14	26-14	26-14	
	V0			V0			V0		
	18			18			8-10		
订货信息Order Information	订货信息Order Information			订货信息Order Information			订货信息Order Information		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TP10-2-GY	TP16-2-GY			TP1.5-3-GY			TP1.5-3-GY		
TP10-2-OG	TP16-2-OG			TP1.5-3-OG			TP1.5-3-OG		
TP10-2-BU	TP16-2-BU			TP1.5-3-BU			TP1.5-3-BU		
配套附件Accessory	配套附件Accessory			配套附件Accessory			配套附件Accessory		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TP10-2-GY-EA	TP16-2-GY-EA			TP1.5-3-GY-EA			TP1.5-3-GY-EA		
TP10-2-OG-EA	TP16-2-OG-EA			TP1.5-3-OG-EA			TP1.5-3-OG-EA		
TP10-2-BU-EA	TP16-2-BU-EA			TP1.5-3-BU-EA			TP1.5-3-BU-EA		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
*	*			*			*		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TJA10.2-2	TJA12.2-2			TJA3.5-2			TJA3.5-2		
*	*			TJA3.5-3			TJA3.5-3		
*	*			...			...		
*	*			TJA3.5-10			TJA3.5-10		
*	*			...			...		
*	*			TJA3.5-50			TJA3.5-50		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
WS-TP10-5	WS-TP16-5			WS-TP1.5-5			WS-TP1.5-5		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TMB10.2-10	312801			*			*		
TMZ9.6-50	TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TMB8.2-50	TMB8.2-50			TMB3.5-100			TMB3.5-100		

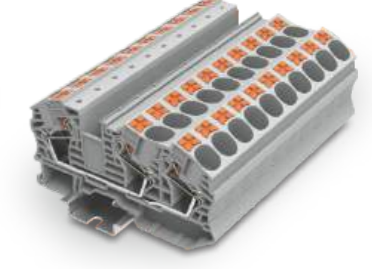








	2.5mm <sup>2</sup> 一进两出接线端子 1-2 Feed Through Terminal Block			4mm <sup>2</sup> 一进两出接线端子 1-2 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	5.2	60.2	35.2	6.2	66.3	35.5
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage	800	600		800	600	
额定电流Rated Current	24	20		32	30	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
	26-12	26-12	26-12	24-10	24-10	24-10
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	8-10			10-12		
产品Product	颜色Colour			颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray			灰Gray		
	橙Orange			橙Orange		
	蓝Blue			蓝Blue		
端板Cover Plate	订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray			灰Gray		
	橙Orange			橙Orange		
	蓝Blue			蓝Blue		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	*			*		
跨接件Jumper	订货号Order NO.			订货号Order NO.		
位数Poles No.	颜色Colour			颜色Colour		
2	黄Yellow			黄Yellow		
3	黄Yellow			黄Yellow		
...	黄Yellow			黄Yellow		
10	.....			.....		
... (10位以上整数位)	黄Yellow			黄Yellow		
50	黄Yellow			黄Yellow		
闪电标记Front Marker	订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP2.5-5			WS-TP4-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.		
10位PCS	305801			306801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB5.2-120			TMB6.2-100		

	6mm <sup>2</sup> 一进两出接线端子 1-2 Feed Through Terminal Block			10mm <sup>2</sup> 一进两出接线端子 1-2 Feed Through Terminal Block			16mm <sup>2</sup> 一进两出接线端子 1-2 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
8.2	74.5	42.2	10.2	88.9	49.6	12.2	100.4	52.6	
IEC	UL		IEC	UL		IEC	UL		
1000	600		1000	600		1000	600		
41	40		57	60		76	85		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.5-10	0.5-6	0.5-6	0.5-16	0.5-10	0.5-10	0.5-25	0.5-16	0.5-16	
20-8	20-8	20-8	20-6	20-6	20-6	20-4	20-4	20-4	
	V0			V0			V0		
	10-12			18			18		
订货信息Order Information	订货信息Order Information			订货信息Order Information			订货信息Order Information		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TP6-3-GY	TP10-3-GY			TP16-3-GY			TP16-3-GY		
TP6-3-OG	TP10-3-OG			TP16-3-OG			TP16-3-OG		
TP6-3-BU	TP10-3-BU			TP16-3-BU			TP16-3-BU		
配套附件Accessory	配套附件Accessory			配套附件Accessory			配套附件Accessory		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TP6-3-GY-EA	TP10-3-GY-EA			TP16-3-GY-EA			TP16-3-GY-EA		
TP6-3-OG-EA	TP10-3-OG-EA			TP16-3-OG-EA			TP16-3-OG-EA		
TP6-3-BU-EA	TP10-3-BU-EA			TP16-3-BU-EA			TP16-3-BU-EA		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
*	*			*			*		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TJA8.2-2	TJA10.2-2			TJA12.2-2			TJA12.2-2		
TJA8.2-3	*			*			*		
.....	*			*			*		
TJA8.2-10	*			*			*		
*	*			*			*		
*	*			*			*		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
WS-TP6-5	WS-TP10-5			WS-TP16-5			WS-TP16-5		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
308801	TMB10.2-10			312801			312801		
TMZ9.6-50	TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		
订货号Order NO.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
TMB8.2-50	TMB8.2-50			TMB8.2-50			TMB8.2-50		



	1.5mm <sup>2</sup> 两进两出接线端子 2-2 Feed Through Terminal Block			2.5mm <sup>2</sup> 两进两出接线端子 2-2 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	3.5	65.2	30.5	5.2	72.2	35.3
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage	500	300		800	600	
额定电流Rated Current	17.5	15		24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-1.5	0.2-1.5	0.2-1.0	0.2-4	0.2-2.5	0.2-2.5
	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	8-10			8-10		
产品信息Product	订货号Order NO.			订货号Order NO.		
颜色Colour	TP1.5-4-GY			TP2.5-4-GY		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	TP1.5-4-OG			TP2.5-4-OG		
	TP1.5-4-BU			TP2.5-4-BU		
配套附件Accessory	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	TP1.5-4-GY-EA			TC1.5-4-GY-EA		
厚度2.2mm Thickness2.2mm	TP1.5-4-OG-EA			TC1.5-4-OG-EA		
	TP1.5-4-BU-EA			TC1.5-4-BU-EA		
补偿盖板Compensatory Plate	订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	*			*		
跨接件Jumper	订货号Order NO.			订货号Order NO.		
位数Poles No.	TJA3.5-2			TJA5.2-2		
颜色Colour	TJA3.5-3			TJA5.2-3		
2	.....			.....		
3	TJA3.5-10			TJA5.2-10		
...	.....			.....		
10	.....			.....		
... (10位以上整数位)	.....			.....		
50	TJA3.5-50			.....		
闪电标记Front Marker	订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP1.5-5			WS-TP2.5-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.		
10位PCS	*			305801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB3.5-100			TMB5.2-120		

	4mm <sup>2</sup> 两进两出接线端子 2-2 Feed Through Terminal Block			6mm <sup>2</sup> 两进两出接线端子 2-2 Feed Through Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
6.2	77.7	35.5	8.2	91	42.2	
IEC	UL		IEC	UL		
800	600		1000	600		
32	30		41	40		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6	
24-10	24-10	24-10	20-8	20-8	20-8	
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	10-12			10-12		
产品信息Product	订货号Order NO.			订货号Order NO.		
颜色Colour	TP4-4-GY			TP6-4-GY		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	TP4-4-OG			TP6-4-OG		
	TP4-4-BU			TP6-4-BU		
配套附件Accessory	订货号Order NO.			订货号Order NO.		
盖板Cover Plate	TP4-4-GY-EA			TP6-4-GY-EA		
厚度2.2mm Thickness2.2mm	TP4-4-OG-EA			TP6-4-OG-EA		
	TP4-4-BU-EA			TP6-4-BU-EA		
补偿盖板Compensatory Plate	订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	*			*		
跨接件Jumper	订货号Order NO.			订货号Order NO.		
位数Poles No.	TJA6.2-2			TJA8.2-2		
颜色Colour	TJA6.2-3			TJA8.2-3		
2	.....			.....		
3	TJA6.2-10			TJA8.2-10		
...	.....			.....		
10	.....			.....		
... (10位以上整数位)	.....			.....		
50	.....			.....		
闪电标记Front Marker	订货号Order NO.			订货号Order NO.		
5PCS 5片一条	WS-TP4-5			WS-TP6-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.		
10位PCS	306801			308801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB6.2-100			TMB8.2-50		



1.5mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

2.5mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

4mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

6mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

10mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*
	*
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
...	黄Yellow
10	.....
... (10位以上整数位)	黄Yellow
50	黄Yellow
闪电标记Front Marker	
5PCS 5片一条	WS-TP1.5-5
正面标记Front Marker	
10位PCS	*
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
	TMZ9.6-50
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB3.5-100

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	48	30.5
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	48.2	35.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	54.9	35.5
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
V0		
10-12		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.2	58	42.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-6
20-8	20-8	20-8
V0		
10-12		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10.2	67.7	49.6
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-16	0.5-10	0.5-10
20-6	20-6	20-6
V0		
18		

订货信息Order Information	
订货号Order NO.	TP1.5-2-PE
*	*
*	*

订货信息Order Information	
订货号Order NO.	TP2.5-2-PE
*	*
*	*

订货信息Order Information	
订货号Order NO.	TP4-2-PE
*	*
*	*

订货信息Order Information	
订货号Order NO.	TP6-2-PE
*	*
*	*

订货信息Order Information	
订货号Order NO.	TP10-2-PE
*	*
*	*

配套附件Accessory	
订货号Order NO.	TP1.5-2-GY-EA TP1.5-2-OG-EA TP1.5-2-BU-EA

配套附件Accessory	
订货号Order NO.	TP2.5-2-GY-EA TP2.5-2-OG-EA TP2.5-2-BU-EA

配套附件Accessory	
订货号Order NO.	TC4-2-GY-EA TC4-2-OG-EA TC4-2-BU-EA

配套附件Accessory	
订货号Order NO.	TP6-2-GY-EA TP6-2-OG-EA TP6-2-BU-EA

配套附件Accessory	
订货号Order NO.	TP10-2-GY-EA TP10-2-OG-EA TP10-2-BU-EA

跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
...	黄Yellow
10	.....
... (10位以上整数位)	黄Yellow
50	黄Yellow

跨接件Jumper	
订货号Order NO.	TJA3.5-2 TJA3.5-3 ..... TJA3.5-10 ..... TJA3.5-50

跨接件Jumper	
订货号Order NO.	TJA6.2-2 TJA6.2-3 ..... TJA6.2-10 * *

跨接件Jumper	
订货号Order NO.	TJA8.2-2 TJA8.2-3 ..... TJA8.2-10 * *

跨接件Jumper	
订货号Order NO.	TJA10.2-2 * * * *

闪电标记Front Marker	
5PCS 5片一条	WS-TP1.5-5
正面标记Front Marker	
10位PCS	*
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
	TMZ9.6-50
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB3.5-100

闪电标记Front Marker	
5PCS 5片一条	WS-TP2.5-5
正面标记Front Marker	
10位PCS	305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
	TMZ9.6-50
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB5.2-120







闪电标记Front Marker	
5PCS 5片一条	WS-TP4-5
正面标记Front Marker	
10位PCS	306801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
	TMZ9.6-50
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB6.2-100

闪电标记Front Marker	
5PCS 5片一条	WS-TP6-5
正面标记Front Marker	
10位PCS	308801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
	TMZ9.6-50
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB8.2-50

闪电标记Front Marker	
5PCS 5片一条	WS-TP10-5
正面标记Front Marker	
10位PCS	TMB10.2-10
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
	TMZ9.6-50
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB8.2-50











TP系列弹簧接线端子

TP Rail-mounted terminal blocks with spring-cage clamp



16mm <sup>2</sup> 一进一出接地端子 1-1 Feed Through Ground Terminal Block				1.5mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block			
技术参数Technical Parameter				技术参数Technical Parameter			
厚度Thickness	宽度Width	高度Height		厚度Thickness	宽度Width	高度Height	
12.2	75.4	52.6		3.5	57.1	30.5	
IEC		UL		IEC		UL	
* 额定电压Rated Voltage [V]		* 额定电流Rated Current [A]		* 额定电压Rated Voltage [V]		* 额定电流Rated Current [A]	
接线容量Wire Range				接线容量Wire Range			
刚性Solid [mm <sup>2</sup> ]	柔性Fine Stranded	带冷压头Furrule		刚性Solid [mm <sup>2</sup> ]	柔性Fine Stranded	带冷压头Furrule	
0.5-25	0.5-16	0.5-16		0.2-1.5	0.2-1.5	0.2-1.0	
20-4 [AWG]		20-4		26-14 [AWG]		26-14	
其余参数Other Parameters				其余参数Other Parameters			
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94				V0			
剥线长度Strip length [mm]		18		剥线长度Strip length [mm]		8-10	
产品信息Order Information				产品信息Order Information			
产品Product		颜色Colour		产品Product		颜色Colour	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		* * *		* * *		* * *	
配套附件Accessory				配套附件Accessory			
盖板Cover Plate		厚度2.2mm Thickness 2.2mm		盖板Cover Plate		厚度2.2mm Thickness 2.2mm	
* * *		灰Gray 橙Orange 蓝Blue		* * *		灰Gray 橙Orange 蓝Blue	
补偿盖板Compensatory Plate		厚度1.00mm Thickness 1.00mm		补偿盖板Compensatory Plate		厚度1.00mm Thickness 1.00mm	
* * *		灰Gray		* * *		灰Gray	
跨接件Jumper		位数Poles No.		跨接件Jumper		位数Poles No.	
* * * * *		黄Yellow 黄Yellow 黄Yellow ..... 黄Yellow 黄Yellow		* * * * * *		黄Yellow 黄Yellow 黄Yellow ..... 黄Yellow 黄Yellow	
闪电标记Front Marker		5PCS 5片一条		闪电标记Front Marker		5PCS 5片一条	
* * *		WS-TP16-5		* * *		WS-TP1.5-5	
正面标记Front Marker		10位PCS		正面标记Front Marker		10位PCS	
* * *		312801		* * *		305801	
卷带标记 (50米一卷) Winding marking (50 meters/roll)		* * *		卷带标记 (50米一卷) Winding marking (50 meters/roll)		* * *	
* * *		TMZ9.6-50		* * *		TMZ9.6-50	
正面标记和侧面标记Front And Side Marker		* * *		正面标记和侧面标记Front And Side Marker		* * *	
* * *		TMB8.2-50		* * *		TMB3.5-100	

2.5mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block			4mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block			6mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block		
技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
5.2	60.2	35.2	6.2	66.3	35.5	8.2	74.5	42.2
IEC		UL	IEC		UL	IEC		UL
* 额定电压Rated Voltage [V]		* 额定电流Rated Current [A]	* 额定电压Rated Voltage [V]		* 额定电流Rated Current [A]	* 额定电压Rated Voltage [V]		* 额定电流Rated Current [A]
接线容量Wire Range			接线容量Wire Range			接线容量Wire Range		
刚性Solid [mm <sup>2</sup> ]	柔性Fine Stranded	带冷压头Furrule	刚性Solid [mm <sup>2</sup> ]	柔性Fine Stranded	带冷压头Furrule	刚性Solid [mm <sup>2</sup> ]	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
26-12 [AWG]		26-12	24-10 [AWG]		24-10	20-8 [AWG]		20-8
其余参数Other Parameters			其余参数Other Parameters			其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0		
剥线长度Strip length [mm]		8-10	剥线长度Strip length [mm]		10-12	剥线长度Strip length [mm]		10-12
产品信息Order Information			产品信息Order Information			产品信息Order Information		
产品Product		颜色Colour	产品Product		颜色Colour	产品Product		颜色Colour
* * *		黄Yellow green	* * *		黄Yellow green	* * *		黄Yellow green
配套附件Accessory			配套附件Accessory			配套附件Accessory		
盖板Cover Plate		厚度2.2mm Thickness 2.2mm	盖板Cover Plate		厚度2.2mm Thickness 2.2mm	盖板Cover Plate		厚度2.2mm Thickness 2.2mm
* * *		灰Gray 橙Orange 蓝Blue	* * *		灰Gray 橙Orange 蓝Blue	* * *		灰Gray 橙Orange 蓝Blue
补偿盖板Compensatory Plate		厚度1.00mm Thickness 1.00mm	补偿盖板Compensatory Plate		厚度1.00mm Thickness 1.00mm	补偿盖板Compensatory Plate		厚度1.00mm Thickness 1.00mm
* * *		灰Gray	* * *		灰Gray	* * *		灰Gray
跨接件Jumper		位数Poles No.	跨接件Jumper		位数Poles No.	跨接件Jumper		位数Poles No.
* * * * *		黄Yellow 黄Yellow 黄Yellow ..... 黄Yellow 黄Yellow	* * * * * *		黄Yellow 黄Yellow 黄Yellow ..... 黄Yellow 黄Yellow	* * * * * *		黄Yellow 黄Yellow 黄Yellow ..... 黄Yellow 黄Yellow
闪电标记Front Marker		5PCS 5片一条	闪电标记Front Marker		5PCS 5片一条	闪电标记Front Marker		5PCS 5片一条
* * *		WS-TP2.5-5	* * *		WS-TP4-5	* * *		WS-TP6-5
正面标记Front Marker		10位PCS	正面标记Front Marker		10位PCS	正面标记Front Marker		10位PCS
* * *		305801	* * *		306801	* * *		308801
卷带标记 (50米一卷) Winding marking (50 meters/roll)		* * *	卷带标记 (50米一卷) Winding marking (50 meters/roll)		* * *	卷带标记 (50米一卷) Winding marking (50 meters/roll)		* * *
* * *		TMZ9.6-50	* * *		TMZ9.6-50	* * *		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		* * *	正面标记和侧面标记Front And Side Marker		* * *	正面标记和侧面标记Front And Side Marker		* * *
* * *		TMB5.2-120	* * *		TMB6.2-100	* * *		TMB8.2-50

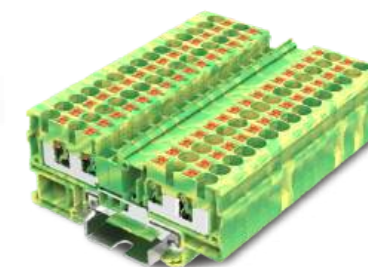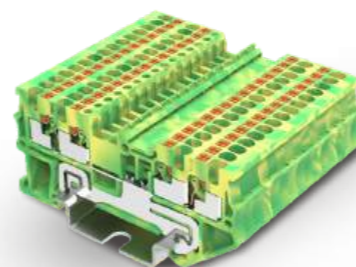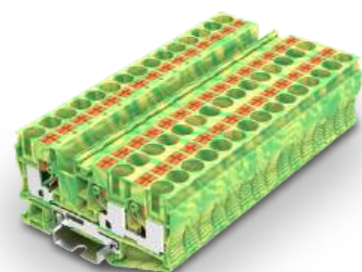

10mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

16mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

1.5mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block

2.5mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block

4mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]
产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	* *
配套附件Accessory	
端板Cover Plate	灰Gray 厚度2.2mm Thickness2.2mm 橙Orange 蓝Blue
补偿端板Compensatory Plate	灰Gray 厚度1.00mm Thickness1.00mm
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
...	黄Yellow
10	.....
... (10位以上整数位)	黄Yellow
50	黄Yellow
闪电标记Front Marker	5PCS 5片一条
正面标记Front Marker	10位PCS
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	


技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10.2	88.9	49.6
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12.2	100.4	52.6
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	65.2	30.5
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72.2	35.3
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	77.7	35.5
订货信息Order Information		
订货号Order NO.		
TP10-3-PE		
*		
*		
订货信息Order Information		
订货号Order NO.		
TP16-3-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TP10-3-GY-EA	TP10-3-OG-EA	TP10-3-BU-EA
订货号Order NO.		
*	*	*
订货信息Order Information		
订货号Order NO.		
TJA10.2-2	*	*
*	*	*
*	*	*
*	*	*
*	*	*
*	*	*
订货信息Order Information		
订货号Order NO.		
WS-TP10-5	TMB10.2-10	TMZ9.6-50
WS-TP16-5	312801	TMZ9.6-50
订货信息Order Information		
订货号Order NO.		
WS-TP1.5-5	*	TMZ9.6-50
WS-TP2.5-5	305801	TMZ9.6-50
WS-TP4-5	306801	TMZ9.6-50
订货信息Order Information		
订货号Order NO.		
WS-TP1.5-5	*	TMZ9.6-50
WS-TP2.5-5	305801	TMZ9.6-50
WS-TP4-5	306801	TMZ9.6-50

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12.2	100.4	52.6
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	65.2	30.5
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72.2	35.3
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	77.7	35.5
订货信息Order Information		
订货号Order NO.		
TP16-3-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TP16-3-GY-EA	TP16-3-OG-EA	TP16-3-BU-EA
订货号Order NO.		
*	*	*
订货信息Order Information		
订货号Order NO.		
TJA12.2-2	*	*
*	*	*
*	*	*
*	*	*
*	*	*
*	*	*
订货信息Order Information		
订货号Order NO.		
WS-TP16-5	TMB16.2-10	TMZ9.6-50
WS-TP1.5-5	312801	TMZ9.6-50
WS-TP2.5-5	305801	TMZ9.6-50
WS-TP4-5	306801	TMZ9.6-50

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	65.2	30.5
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72.2	35.3
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	77.7	35.5
订货信息Order Information		
订货号Order NO.		
TP1.5-4-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TP1.5-4-GY-EA	TP1.5-4-OG-EA	TP1.5-4-BU-EA
订货号Order NO.		
*	*	*
订货信息Order Information		
订货号Order NO.		
TJA3.5-2	TJA3.5-3	TJA3.5-10
TJA5.2-2	TJA5.2-3	TJA5.2-10
*	*	*
*	*	*
*	*	*
订货信息Order Information		
订货号Order NO.		
WS-TP1.5-5	*	TMZ9.6-50
WS-TP2.5-5	305801	TMZ9.6-50
WS-TP4-5	306801	TMZ9.6-50


技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72.2	35.3
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	77.7	35.5
订货信息Order Information		
订货号Order NO.		
TP2.5-4-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TC1.5-4-GY-EA	TC1.5-4-OG-EA	TC1.5-4-BU-EA
订货号Order NO.		
*	*	*
订货信息Order Information		
订货号Order NO.		
TJA5.2-2	TJA5.2-3	TJA5.2-10
*	*	*
*	*	*
*	*	*
订货信息Order Information		
订货号Order NO.		
WS-TP2.5-5	*	TMZ9.6-50
WS-TP4-5	306801	TMZ9.6-50

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	77.7	35.5
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	77.7	35.5
订货信息Order Information		
订货号Order NO.		
TP4-4-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TP4-4-GY-EA	TP4-4-OG-EA	TP4-4-BU-EA
订货号Order NO.		
*	*	*
订货信息Order Information		
订货号Order NO.		
TJA6.2-2	TJA6.2-3	TJA6.2-10
*	*	*
*	*	*
*	*	*
订货信息Order Information		
订货号Order NO.		
WS-TP4-5	306801	TMZ9.6-50
WS-TP4-5	306801	TMZ9.6-50




6mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	8.2	91	42.2
额定参数Rated Parameters				
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range				
	[mm <sup>2</sup> ]	0.5-10	0.5-6	0.5-6
	[AWG]	20-8	20-8	20-8
其余参数Other Parameters				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	10-12		
产品Product		订货信息Order Information		
颜色Colour	黄绿Yellow green	订货号Order NO.	TP6-4-PE	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*		*	
	*		*	
配套附件Accessory		订货信息Order Information		
端板Cover Plate		订货号Order NO.	TP6-4-GY-EA	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue		TP6-4-OG-EA TP6-4-BU-EA	
补偿端板Compensatory Plate		订货号Order NO.	*	
厚度1.00mm Thickness1.00mm	灰Gray			
跨接件Jumper		订货号Order NO.	TJA8.2-2	
位数Poles No.	颜色Colour		TJA8.2-3	
2	黄Yellow		.....	
3	黄Yellow		TJA8.2-10	
...	黄Yellow		*	
10	.....		*	
... (10位以上整数位)	黄Yellow			
50	黄Yellow			
闪电标记Front Marker		订货号Order NO.	WS-TP6-5	
5PCS 5片一条				
正面标记Front Marker		订货号Order NO.	308801	
10位PCS				
卷带标记 (50米一卷) Winding marking (50 meters/roll)		订货号Order NO.	TMZ9.6-50	
正面标记和侧面标记Front And Side Marker		订货号Order NO.	TMB8.2-50	
可提供印字服务Printing Service				



2.5mm<sup>2</sup> 斜面一进一出接线端子  
1-1 Feed Through Angled Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
	V0	
	8-10	
订货信息Order Information		
订货号Order NO.	TPS2.5-2-GY	
	TPS2.5-2-OG	
	TPS2.5-2-BU	
配套附件Accessory		
订货号Order NO.	TPS2.5-2-GY-EA	
	TPS2.5-2-OG-EA	
	TPS2.5-2-BU-EA	
订货号Order NO.	*	
订货号Order NO.	TJA5.2-2	
	TJA5.2-3	
	TJA5.2-4	
	.....	
	TJA5.2-9	
	TJA5.2-10	
订货号Order NO.	WS-TP2.5-5	
订货号Order NO.	305801	
订货号Order NO.	TMZ9.6-50	
订货号Order NO.	TMB5.2-120	




2.5mm<sup>2</sup> 斜面一进二出接线端子  
1-2 Feed Through Angled Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
	V0	
	8-10	
订货信息Order Information		
订货号Order NO.	TPS2.5-3-GY	
	TPS2.5-3-OG	
	TPS2.5-3-BU	
配套附件Accessory		
订货号Order NO.	TPS2.5-3-GY-EA	
	TPS2.5-3-OG-EA	
	TPS2.5-3-BU-EA	
订货号Order NO.	*	
订货号Order NO.	TJA5.2-2	
	TJA5.2-3	
	TJA5.2-4	
	.....	
	TJA5.2-9	
	TJA5.2-10	
订货号Order NO.	WS-TP2.5-5	
订货号Order NO.	305801	
订货号Order NO.	TMZ9.6-50	
订货号Order NO.	TMB5.2-120	





2.5mm<sup>2</sup> 斜面二进二出接线端子  
2-2 Feed Through Angled Terminal Block



技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
	V0	
	8-10	
订货信息Order Information		
订货号Order NO.	TPS2.5-4-GY	
	TPS2.5-4-OG	
	TPS2.5-4-BU	
配套附件Accessory		
订货号Order NO.	TPS2.5-4-GY-EA	
	TPS2.5-4-OG-EA	
	TPS2.5-4-BU-EA	
订货号Order NO.	*	
订货号Order NO.	TJA5.2-2	
	TJA5.2-3	
	TJA5.2-4	
	.....	
	TJA5.2-9	
	TJA5.2-10	
订货号Order NO.	WS-TP2.5-5	
订货号Order NO.	305801	
订货号Order NO.	TMZ9.6-50	
订货号Order NO.	TMB5.2-120	



2.5mm<sup>2</sup> 斜面一进一接地端子  
1-1 Feed Through Angled Ground Terminal Block



2.5mm<sup>2</sup> 斜面一进二出接地端子  
1-2 Feed Through Angled Ground Terminal Block

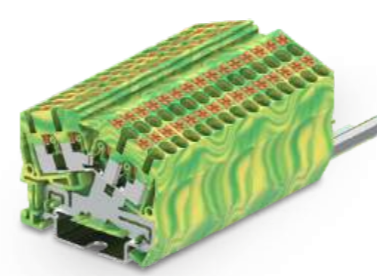

2.5mm<sup>2</sup> 斜面二进二出接地端子  
2-2 Feed Through Angled Ground Terminal Block





尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	.....
9	黄Yellow
10	黄Yellow
闪电标记Front Marker	
5PCS 5片一条	WS-TP2.5-5
正面标记Front Marker	
10位PCS	305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
正面标记和侧面标记Front And Side Marker	可提供印字服务Printing Service

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
订货信息Order Information		
订货号Order NO.		
TPS2.5-2-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TPS2.5-2-GY-EA		
TPS2.5-2-OG-EA		
TPS2.5-2-BU-EA		
订货号Order NO.		
*		
订货号Order NO.		
2		
3		
4		
...		
9		
10		
订货号Order NO.		
WS-TP2.5-5		
订货号Order NO.		
305801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
正面标记和侧面标记Front And Side Marker		
TMB5.2-120		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
订货信息Order Information		
订货号Order NO.		
TPS2.5-3-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TPS2.5-2-GY-EA		
TPS2.5-2-OG-EA		
TPS2.5-2-BU-EA		
订货号Order NO.		
*		
订货号Order NO.		
2		
3		
4		
...		
9		
10		
订货号Order NO.		
WS-TP2.5-5		
订货号Order NO.		
305801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
正面标记和侧面标记Front And Side Marker		
TMB5.2-120		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	50.9	41.4
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
订货信息Order Information		
订货号Order NO.		
TPS2.5-4-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TPS2.5-2-GY-EA		
TPS2.5-2-OG-EA		
TPS2.5-2-BU-EA		
订货号Order NO.		
*		
订货号Order NO.		
2		
3		
4		
...		
9		
10		
订货号Order NO.		
WS-TP2.5-5		
订货号Order NO.		
305801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
正面标记和侧面标记Front And Side Marker		
TMB5.2-120		





尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	灰Gray
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	橙Orange
	蓝Blue
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray
	橙Orange
	蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
标记支架Marker Stents	
	灰Gray
跨接件Jumper	
位数Poles No.	
	颜色Colour
2	黄Yellow
3	黄Yellow
...	黄Yellow
10	.....
... (10位以上整数位)	黄Yellow
50	黄Yellow
闪电标记Front Marker	
5PCS 5片一条	
正面标记Front Marker	
10位PCS	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

1.5mm <sup>2</sup> 双层接线端子 Double Level Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	65.4	41.1
IEC	UL	
500	300	
16	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm]		
8-10		

订货信息Order Information	
订货号Order NO.	TPD1.5-2-GY
	TPD1.5-2-OG
	TPD1.5-2-BU

配套附件Accessory	
订货号Order NO.	TPD1.5-2-GY-EA
	TPD1.5-2-OG-EA
	TPD1.5-2-BU-EA

订货号Order NO.	*
订货号Order NO.	*
订货号Order NO.	*

订货号Order NO.	TJA3.5-2
	TJA3.5-3
	.....
	TJA3.5-10
	.....
	TJA3.5-50

订货号Order NO.	WS-TP1.5-5
订货号Order NO.	*
订货号Order NO.	TMB3.5-100

1.5mm <sup>2</sup> 双层等电位接线端子 Double Level Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	65.4	41.1
IEC	UL	
500	300	
16	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm]		
8-10		

订货信息Order Information	
订货号Order NO.	TPD1.5-2-PV(黑色)
	*
	*

配套附件Accessory	
订货号Order NO.	TPD1.5-2-GY-EA
	TPD1.5-2-OG-EA
	TPD1.5-2-BU-EA

订货号Order NO.	*
订货号Order NO.	*
订货号Order NO.	*

订货号Order NO.	TJA5.2-2
	TJA5.2-3
	.....
	TJA5.2-10
	.....
	TJA5.2-50

订货号Order NO.	WS-TP2.5-5
订货号Order NO.	*
订货号Order NO.	TMB5.2-120

2.5mm <sup>2</sup> 双层接线端子 Double Level Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68.2	45.8
IEC	UL	
500	600	
22	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm]		
8-10		

订货信息Order Information	
订货号Order NO.	TPD2.5-2-GY
	TPD2.5-2-OG
	TPD2.5-2-BU

配套附件Accessory	
订货号Order NO.	TPD2.5-2-GY-EA
	TPD2.5-2-OG-EA
	TPD2.5-2-BU-EA

订货号Order NO.	*
订货号Order NO.	*
订货号Order NO.	TPZJ2.5-2

订货号Order NO.	TJA5.2-2
	TJA5.2-3
	.....
	TJA5.2-10
	.....
	*
	*

订货号Order NO.	WS-TP2.5-5
订货号Order NO.	*
订货号Order NO.	TMB5.2-120

2.5mm <sup>2</sup> 双层等电位接线端子 Double Level With Equipotential Bonder Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68.2	45.8
IEC	UL	
500	600	
22	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm]		
8-10		





订货信息Order Information	
订货号Order NO.	TPD2.5-2-PV (黑色)
	*
	*

配套附件Accessory	
订货号Order NO.	TPD2.5-2-GY-EA
	TPD2.5-2-OG-EA
	TPD2.5-2-BU-EA

订货号Order NO.	*
订货号Order NO.	*
订货号Order NO.	TPZJ2.5-2

订货号Order NO.	TJA5.2-2
	TJA5.2-3
	.....
	TJA5.2-10
	.....
	*
	*

订货号Order NO.	WS-TP2.5-5
订货号Order NO.	*
订货号Order NO.	TMB5.2-120



**4mm² 双层接线端子**  
**Double Level Terminal Block**

**4mm² 双层等电位接线端子**  
**Double Level With Equipotential Bond Terminal Block**

**2.5mm² 双层接线端子 每层3个接线位**  
**Double level Terminal Block, 3 connection poles on each level**

**2.5mm² 双层等电位接线端子 每层3个接线位**  
**Double level With Equipotential Bond Terminal Block, 3 connection poles on each level**

尺寸Size	
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	84	46.2
IEC	UL	
500	600	
28	28	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
V0		
12		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	84	46.2
IEC	UL	
500	600	
28	28	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
V0		
12		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	88.65	45.8
IEC	UL	
500	600	
22	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-4	0.2-2.5	0.2-2.5
28-12	28-12	28-12
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	88.65	45.8
IEC	UL	
500	600	
22	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-4	0.2-2.5	0.2-2.5
28-12	28-12	28-12
V0		
8-10		

产品Product	
颜色Colour	灰Gray
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	橙Orange
	蓝Blue

订货信息Order Information	
订货号Order NO.	TPD4-2-GY
	TPD4-2-OG
	TPD4-2-BU

订货信息Order Information	
订货号Order NO.	TPD4-2-PV(黑色)

订货信息Order Information	
订货号Order NO.	TPD2.5-3-GY
	TPD2.5-3-OG
	TPD2.5-3-BU

订货信息Order Information	
订货号Order NO.	TPD2.5-3-PV(黑色)

端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray
	橙Orange
	蓝Blue

配套附件Accessory	
订货号Order NO.	TPD4-2-GY-EA
	TPD4-2-OG-EA
	TPD4-2-BU-EA

配套附件Accessory	
订货号Order NO.	TPD4-2-GY-EA
	TPD4-2-OG-EA
	TPD4-2-BU-EA

配套附件Accessory	
订货号Order NO.	TPD2.5-3-GY-EA
	TPD2.5-3-OG-EA
	TPD2.5-3-BU-EA

配套附件Accessory	
订货号Order NO.	TPD2.5-3-GY-EA
	TPD2.5-3-OG-EA
	TPD2.5-3-BU-EA

补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray

配套附件Accessory	
订货号Order NO.	*

配套附件Accessory	
订货号Order NO.	*

配套附件Accessory	
订货号Order NO.	*

配套附件Accessory	
订货号Order NO.	*

标记支架Marker Stents	
颜色Colour	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
...	黄Yellow
10	.....
... (10位以上整数位)	黄Yellow
50	黄Yellow

订货信息Order Information	
订货号Order NO.	*
	*
	*
	*
	*
	*

订货信息Order Information	
订货号Order NO.	*
	*
	*
	*
	*
	*

订货信息Order Information	
订货号Order NO.	TPZJ2.5-2

订货信息Order Information	
订货号Order NO.	TPZJ2.5-2

闪电标记Front Marker	
5PCS 5片一条	WS-TP4-5
正面标记Lightning Marker	
10PCS一条	*
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB6.2-100

闪电标记Front Marker	
订货号Order NO.	WS-TP4-5
	*

闪电标记Front Marker	
订货号Order NO.	WS-TP4-5
	*

闪电标记Front Marker	
订货号Order NO.	WS-TP2.5-5
	*

闪电标记Front Marker	
订货号Order NO.	WS-TP2.5-5
	*






正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB6.2-100

正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB6.2-100

正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB6.2-100

正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB5.2-120

正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB5.2-120



1.5mm<sup>2</sup> 双层接地端子  
Double Level Ground Terminal Block

2.5mm<sup>2</sup> 双层接地端子  
Double Level Ground Terminal Block

4mm<sup>2</sup> 双层接地端子  
Double Level Ground Terminal Block

2.5mm<sup>2</sup> 双层接地端子 每层3个接线位  
Double level Ground Terminal Block,  
3 connection poles on each level

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	黄Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*
	*
盖板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue
补偿盖板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
标记支架Marker Stents	
	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
...	黄Yellow
10	.....
... (10位以上整数位)	黄Yellow
50	黄Yellow
闪电标记Front Marker	
5PCS 5片一条	WS-TP1.5-5
正面标记Front Marker	
10位PCS	*
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	TMB3.5-100

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	65.4	41.1
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68.2	45.8
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	84	46.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
V0		
12		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	88.65	45.8
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
28-12	28-12	28-12
V0		
8-10		

订货信息Order Information	
订货号Order NO.	TPD1.5-2-PE
*	*
*	*
配套附件Accessory	
订货号Order NO.	TPD1.5-2-GY-EA TPD1.5-2-OG-EA TPD1.5-2-BU-EA
*	*
订货号Order NO.	*
*	TPZJ2.5-2
订货号Order NO.	TJA3.5-2 TJA3.5-3 ..... TJA3.5-10 ..... TJA3.5-50
订货号Order NO.	WS-TP1.5-5
订货号Order NO.	*
订货号Order NO.	TMB3.5-100

订货信息Order Information	
订货号Order NO.	TPD2.5-2-PE
*	*
*	*
配套附件Accessory	
订货号Order NO.	TPD2.5-2-GY-EA TPD2.5-2-OG-EA TPD2.5-2-BU-EA
*	*
订货号Order NO.	*
订货号Order NO.	TPZJ2.5-2
订货号Order NO.	TJA5.2-2 TJA5.2-3 ..... TJA5.2-10 * *
订货号Order NO.	WS-TP2.5-5
订货号Order NO.	*
订货号Order NO.	TMB5.2-120

订货信息Order Information	
订货号Order NO.	TPD4-2-PE
*	*
*	*
配套附件Accessory	
订货号Order NO.	TPD4-2-GY-EA TPD4-2-OG-EA TPD4-2-BU-EA
*	*
订货号Order NO.	*
订货号Order NO.	TPZJ2.5-2
订货号Order NO.	TJA6.2-2 TJA6.2-3 ..... TJA6.2-10 * *
订货号Order NO.	WS-TP4-5
订货号Order NO.	*
订货号Order NO.	TMB6.2-100



订货信息Order Information	
订货号Order NO.	TPD2.5-3-PE
*	*
*	*
配套附件Accessory	
订货号Order NO.	TPD2.5-3-GY-EA TPD2.5-3-OG-EA TPD2.5-3-BU-EA
*	*
订货号Order NO.	*
订货号Order NO.	TPZJ2.5-2
订货号Order NO.	TJA5.2-2 TJA5.2-3 ..... TJA5.2-10 * *
订货号Order NO.	WS-TP2.5-5
订货号Order NO.	*
订货号Order NO.	TMB5.2-120



斜面双层八线接线端子  
Double level angled type terminal block 8-wire



斜面双层八线等电位接线端子  
Double level angled type terminal block with equipotential bond 8-wire

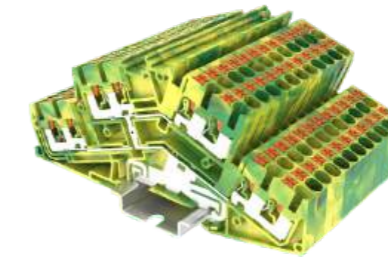

斜面双层八线接地端子  
Double level angled type ground terminal block 8-wire

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	115.2	53
IEC	UL	
800	600	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4.0	0.2-2.5	0.2-2.5
26-12	26-12	26-12
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	115.2	53
IEC	UL	
800	600	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4.0	0.2-2.5	0.2-2.5
26-12	26-12	26-12
V0		
8-10		

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	115.2	53
IEC	UL	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4.0	0.2-2.5	0.2-2.5
26-12	26-12	26-12
V0		
8-10		

产品Product		颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		灰Gray
		橙Orange
		蓝Blue
配套附件Accessory		
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	TPDS2.5-4-GY-EC TPDS2.5-4-OG-EC *
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		订货号Order NO.
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP2.5-5
正面标记Lightning Marker		订货号Order NO.
10PCS一条		305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120


订货信息Order Information		
订货号Order NO.		
TPDS2.5-4-GY		
TPDS2.5-4-OG		
TPDS2.5-4-BU		
配套附件Accessory		
端板Cover Plate	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	TPDS2.5-4-GY-EC TPDS2.5-4-OG-EC *
补偿端板Compensatory Plate	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper	订货号Order NO.	
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker	订货号Order NO.	
5PCS 5片一条		WS-TP2.5-5
正面标记Lightning Marker	订货号Order NO.	
10PCS一条		305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker	订货号Order NO.	
可提供印字服务Printing Service		TMB5.2-120

订货信息Order Information		
订货号Order NO.		
TPDS2.5-4-PV(黑色)		
配套附件Accessory		
端板Cover Plate	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	TPDS2.5-4-GY-EC TPDS2.5-4-OG-EC *
补偿端板Compensatory Plate	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper	订货号Order NO.	
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker	订货号Order NO.	
5PCS 5片一条		WS-TP2.5-5
正面标记Lightning Marker	订货号Order NO.	
10PCS一条		305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker	订货号Order NO.	
可提供印字服务Printing Service		TMB5.2-120

产品Product		颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		灰Gray
		橙Orange
		蓝Blue
配套附件Accessory		
端板Cover Plate		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	TPDS2.5-4-GY-EC TPDS2.5-4-OG-EC *
补偿端板Compensatory Plate		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper		订货号Order NO.
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker		订货号Order NO.
5PCS 5片一条		WS-TP2.5-5
正面标记Lightning Marker		订货号Order NO.
10PCS一条		305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker		订货号Order NO.
可提供印字服务Printing Service		TMB5.2-120

订货信息Order Information		
订货号Order NO.		
TPDS2.5-4-PE		
配套附件Accessory		
端板Cover Plate	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	TPDS2.5-4-GY-EC TPDS2.5-4-OG-EC *
补偿端板Compensatory Plate	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*
跨接件Jumper	订货号Order NO.	
位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10
闪电标记Front Marker	订货号Order NO.	
5PCS 5片一条		WS-TP2.5-5
正面标记Lightning Marker	订货号Order NO.	
10PCS一条		305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)		TMZ9.6-50
正面标记和侧面标记Front And Side Marker	订货号Order NO.	
可提供印字服务Printing Service		TMB5.2-120

**TP系列弹簧接线端子** TP Rail-mounted terminal blocks with spring-cage clamp



2.5mm² 三层接线端子  
Triple Level Terminal Block

**技术参数Technical Parameter**

厚度Thickness	宽度Width	高度Height
5.2	100.7	56.4
IEC	UL	
额定电压Rated Voltage [V]	500	300
额定电流Rated Current [A]	20	20
接线容量Wire Range		
[mm²]	0.2-4	0.2-2.5
[AWG]	26-12	26-12

其余参数Other Parameters
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94
V0
剥线长度Strip length [mm]
8-10

**订货信息Order Information**

<b>产品Product</b>	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPT2.5-2-GY
	橙Orange	TPT2.5-2-OG
	蓝Blue	TPT2.5-2-BU

**配套附件Accessory**

<b>端板Cover Plate</b>	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray	TPT2.5-2-GY-EA
	橙Orange	TPT2.5-2-OG-EA
	蓝Blue	TPT2.5-2-BU-EA

<b>补偿端板Compensatory Plate</b>	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*

<b>标记支架Marker Stents</b>	订货号Order NO.
灰Gray	TPZJ2.5-2

<b>跨接件Jumper</b>		
<b>位数Poles No.</b>	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

<b>闪电标记Front Marker</b>	订货号Order NO.
5PCS 5片一条	WS-TP2.5-5

<b>正面标记Front Marker</b>	订货号Order NO.
10位PCS	*

<b>正面标记和侧面标记Front And Side Marker</b>	订货号Order NO.
可提供印字服务Printing Service	TMB5.2-120



2.5mm² 三层等电位接线端子  
Triple Level With Equipotential Bond Terminal Block

**技术参数Technical Parameter**

厚度Thickness	宽度Width	高度Height
5.2	100.7	56.4
IEC	UL	
额定电压Rated Voltage [V]	500	300
额定电流Rated Current [A]	20	20
接线容量Wire Range		
[mm²]	0.2-4	0.2-2.5
[AWG]	26-12	26-12

其余参数Other Parameters
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94
V0
剥线长度Strip length [mm]
8-10

**订货信息Order Information**

<b>产品Product</b>	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPT2.5-2-GY
	橙Orange	TPT2.5-2-OG
	蓝Blue	TPT2.5-2-BU

**配套附件Accessory**

<b>端板Cover Plate</b>	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray	TPT2.5-2-GY-EA
	橙Orange	TPT2.5-2-OG-EA
	蓝Blue	TPT2.5-2-BU-EA

<b>补偿端板Compensatory Plate</b>	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*

<b>标记支架Marker Stents</b>	订货号Order NO.
灰Gray	TPZJ2.5-2

<b>跨接件Jumper</b>		
<b>位数Poles No.</b>	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

<b>闪电标记Front Marker</b>	订货号Order NO.
5PCS 5片一条	WS-TP2.5-5

<b>正面标记Front Marker</b>	订货号Order NO.
10位PCS	*

<b>正面标记和侧面标记Front And Side Marker</b>	订货号Order NO.
可提供印字服务Printing Service	TMB5.2-120



2.5mm² 三层斜面接线端子  
Triple level angled type terminal block

**技术参数Technical Parameter**

厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
额定电压Rated Voltage [V]	800	600
额定电流Rated Current [A]	20	20
接线容量Wire Range		
[mm²]	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12

其余参数Other Parameters
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94
V0
剥线长度Strip length [mm]
8-10

**订货信息Order Information**

<b>产品Product</b>	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPTS2.5-2-GY
	橙Orange	TPTS2.5-2-OG
	蓝Blue	TPTS2.5-2-BU

**配套附件Accessory**

<b>端板Cover Plate</b>	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray	TPTS2.5-2-GY-EC
	橙Orange	TPTS2.5-2-OG-EC

<b>补偿端板Compensatory Plate</b>	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*


<b>标记支架Marker Stents</b>	订货号Order NO.
灰Gray	TPZJ2.5-3

<b>跨接件Jumper</b>		
<b>位数Poles No.</b>	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

<b>闪电标记Front Marker</b>	订货号Order NO.
5PCS 5片一条	WS-TP2.5-5

<b>正面标记Front Marker</b>	订货号Order NO.
10位PCS	305801

<b>正面标记和侧面标记Front And Side Marker</b>	订货号Order NO.
可提供印字服务Printing Service	TMB5.2-120



2.5mm² 三层斜面接线端子带支架  
Triple level angled type terminal block with marker carrier

**技术参数Technical Parameter**

厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
额定电压Rated Voltage [V]	800	600
额定电流Rated Current [A]	20	20
接线容量Wire Range		
[mm²]	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12

其余参数Other Parameters
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94
V0
剥线长度Strip length [mm]
8-10

**订货信息Order Information**

<b>产品Product</b>	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPTS2.5-2T-GY
	橙Orange	TPTS2.5-2T-OG
	蓝Blue	TPTS2.5-2T-BU

**配套附件Accessory**

<b>端板Cover Plate</b>	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray	TPTS2.5-2-GY-EC
	橙Orange	TPTS2.5-2-OG-EC

<b>补偿端板Compensatory Plate</b>	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*


<b>标记支架Marker Stents</b>	订货号Order NO.
灰Gray	*

<b>跨接件Jumper</b>		
<b>位数Poles No.</b>	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

<b>闪电标记Front Marker</b>	订货号Order NO.
5PCS 5片一条	WS-TP2.5-5

<b>正面标记Front Marker</b>	订货号Order NO.
10位PCS	305801

<b>正面标记和侧面标记Front And Side Marker</b>	订货号Order NO.
可提供印字服务Printing Service	TMB5.2-120



2.5mm² 三层斜面等电位接线端子  
Triple level angled type terminal block with equipotential bond

**技术参数Technical Parameter**

厚度Thickness	宽度Width	高度Height
5.2	89.4	91.05
IEC	UL	
额定电压Rated Voltage [V]	800	600
额定电流Rated Current [A]	20	20
接线容量Wire Range		
[mm²]	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12

其余参数Other Parameters
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94
V0
剥线长度Strip length [mm]
8-10

**订货信息Order Information**

<b>产品Product</b>	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPTS2.5-2-PV(黑色)
	橙Orange	*
	蓝Blue	*

**配套附件Accessory**

<b>端板Cover Plate</b>	订货号Order NO.	
厚度2.2mm Thickness2.2mm	灰Gray	TPTS2.5-2-GY-EC
	橙Orange	TPTS2.5-2-OG-EC

<b>补偿端板Compensatory Plate</b>	订货号Order NO.	
厚度1.00mm Thickness1.00mm	灰Gray	*

<b>标记支架Marker Stents</b>	订货号Order NO.
灰Gray	TPZJ2.5-3

<b>跨接件Jumper</b>		
<b>位数Poles No.</b>	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10


<b>闪电标记Front Marker</b>	订货号Order NO.
5PCS 5片一条	WS-TP2.5-5

<b>正面标记Front Marker</b>	订货号Order NO.
10位PCS	305801


<b>正面标记和侧面标记Front And Side Marker</b>	订货号Order NO.
可提供印字服务Printing Service	TMB5.2-120

TP系列弹簧接线端子


TP Rail-mounted terminal blocks with spring-cage clamp

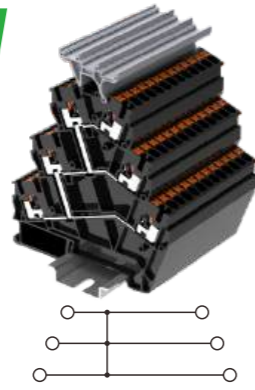

2.5mm<sup>2</sup> 三层斜面等电位接线端子带支架  
Triple level angled type terminal block with equipotential bonder and marker carrier

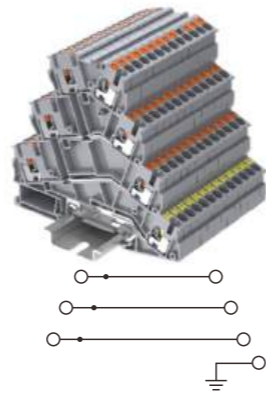

2.5mm<sup>2</sup> 四层斜面接线端子, 带PE支脚  
Quadruple level angled type terminal block with grounding foot

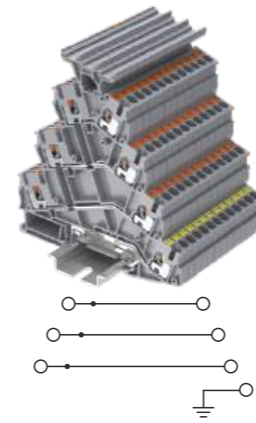

2.5mm<sup>2</sup> 四层斜面接线端子, 带PE支脚带支架  
Quadruple level angled type terminal block with grounding foot and marker carrier

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	灰Gray
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	橙Orange
	蓝Blue
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray
	橙Orange
	蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
标记支架Marker Stents	
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	.....
9	黄Yellow
10	黄Yellow
闪电标记Front Marker	
5PCS 5片一条	
正面标记Front Marker	
10位PCS	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
800	600	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.14-2.5	0.14-2.5	0.14-2.5
26-12	26-12	26-12
订货信息Order Information		
订货号Order NO.		
TPTS2.5-2T-PV(黑色)		
*		
*		
配套附件Accessory		
订货号Order NO.		
TPTS2.5-2-GY-EC		
TPTS2.5-2-OG-EC		
订货号Order NO.		
*		
订货号Order NO.		
*		
订货号Order NO.		
TJA5.2-2		
TJA5.2-3		
TJA5.2-4		
.....		
TJA5.2-9		
TJA5.2-10		
订货号Order NO.		
WS-TP2.5-5		
订货号Order NO.		
305801		
订货号Order NO.		
TMB5.2-120		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	99.4	91
IEC	UL	
800	600	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12
订货信息Order Information		
订货号Order NO.		
TPFS2.5-2-GY		
TPFS2.5-2-OG		
TPFS2.5-2-BU		
配套附件Accessory		
订货号Order NO.		
TPFS2.5-2-GY-EC		
TPFS2.5-2-OG-EC		
订货号Order NO.		
*		
订货号Order NO.		
TPZJ2.5-3		
订货号Order NO.		
TJA5.2-2		
TJA5.2-3		
TJA5.2-4		
.....		
TJA5.2-9		
TJA5.2-10		
订货号Order NO.		
WS-TP2.5-5		
订货号Order NO.		
305801		
订货号Order NO.		
TMB5.2-120		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	99.4	91
IEC	UL	
800	600	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12
订货信息Order Information		
订货号Order NO.		
TPFS2.5-2T-GY		
TPFS2.5-2T-OG		
TPFS2.5-2T-BU		
配套附件Accessory		
订货号Order NO.		
TPFS2.5-2-GY-EC		
TPFS2.5-2-OG-EC		
订货号Order NO.		
*		
订货号Order NO.		
*		
订货号Order NO.		
TJA5.2-2		
TJA5.2-3		
TJA5.2-4		
.....		
TJA5.2-9		
TJA5.2-10		
订货号Order NO.		
WS-TP2.5-5		
订货号Order NO.		
305801		
订货号Order NO.		
TMB5.2-120		



TP系列弹簧接线端子 TP Rail-mounted terminal blocks with spring-cage clamp



2.5mm<sup>2</sup> 三层接地端子  
Triple Level Ground Terminal Block

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
5.2	100.7	56.4
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-10		

订货信息Order Information

订货号Order NO.
TPT2.5-2-PL
*
*

配套附件Accessory

订货号Order NO.
TPT2.5-2-GY-EA
TPT2.5-2-OG-EA
TPT2.5-2-BU-EA
*
TPZJ2.5-2

跨接件Jumper

位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

闪电标记Front Marker

5PCS 5片一条	WS-TP2.5-5
-----------	------------

正面标记Front Marker

10位PCS	*
--------	---

正面标记和侧面标记Front And Side Marker

订货号Order NO.	TMB5.2-120
--------------	------------



2.5mm<sup>2</sup> 三层等电位接地端子  
Triple Level With Equipotential Bond  
Ground Terminal Block

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
5.2	100.7	56.4
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-10		

订货信息Order Information

订货号Order NO.
TPT2.5-2-PE
*
*

配套附件Accessory

订货号Order NO.
TPT2.5-2-GY-EA
TPT2.5-2-OG-EA
TPT2.5-2-BU-EA
*
TPZJ2.5-2

跨接件Jumper

位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

闪电标记Front Marker


5PCS 5片一条	WS-TP2.5-5
-----------	------------

正面标记Front Marker

10位PCS	*
--------	---

正面标记和侧面标记Front And Side Marker

订货号Order NO.	TMB5.2-120
--------------	------------



2.5mm<sup>2</sup> 三层斜面接地端子  
Tripe level angled type ground terminal block

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-10		

订货信息Order Information

订货号Order NO.
TPTS2.5-2-PET
*
*

配套附件Accessory

订货号Order NO.
TPTS2.5-2-GY-EC
TPTS2.5-2-OG-EC
*
TPZJ2.5-3

跨接件Jumper

位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

闪电标记Front Marker


5PCS 5片一条	WS-TP2.5-5
-----------	------------

正面标记Front Marker

10位PCS	305801
--------	--------

正面标记和侧面标记Front And Side Marker

订货号Order NO.	TMB5.2-120
--------------	------------



2.5mm<sup>2</sup> 三层斜面接地端子带支架  
Tripe level angled type ground terminal  
block with marker carrier

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-10		

订货信息Order Information

订货号Order NO.
TPTS2.5-2T-PET
*
*

配套附件Accessory

订货号Order NO.
TPTS2.5-2-GY-EC
TPTS2.5-2-OG-EC
*
TPZJ2.5-3

跨接件Jumper

位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

闪电标记Front Marker


5PCS 5片一条	WS-TP2.5-5
-----------	------------

正面标记Front Marker

10位PCS	305801
--------	--------

正面标记和侧面标记Front And Side Marker

订货号Order NO.	TMB5.2-120
--------------	------------



2.5mm<sup>2</sup> 三层斜面等电位接地端子  
Tripe level angled type ground terminal  
block with equipotential bonder

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
5.2	89.4	91
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-10		

订货信息Order Information

订货号Order NO.
TPTS2.5-2-PE
*
*

配套附件Accessory

订货号Order NO.
TPTS2.5-2-GY-EC
TPTS2.5-2-OG-EC
*
TPZJ2.5-3

跨接件Jumper

位数Poles No.	颜色Colour	订货号Order NO.
2	黄Yellow	TJA5.2-2
3	黄Yellow	TJA5.2-3
4	黄Yellow	TJA5.2-4
...	.....	.....
9	黄Yellow	TJA5.2-9
10	黄Yellow	TJA5.2-10

闪电标记Front Marker


5PCS 5片一条	WS-TP2.5-5
-----------	------------

正面标记Front Marker

10位PCS	305801
--------	--------


正面标记和侧面标记Front And Side Marker

订货号Order NO.	TMB5.2-120
--------------	------------

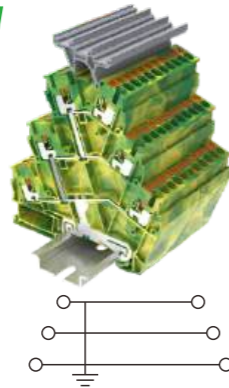


2.5mm<sup>2</sup> 三层斜面等电位接地端子带支架  
Tripe level angled type ground terminal block with equipotential bond and marker carrier

尺寸Size		技术参数Technical Parameter		
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		5.2	89.4	91
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.14-2.5	0.14-2.5	0.14-2.5
	[AWG]	26-12	26-12	26-12
其余参数Other Parameters		V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94				
剥线长度Strip length	[mm]	8-10		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄Yellow green	TPTS2.5-2T-PE		
		*		
		*		
配套附件Accessory		订货信息Order Information		
盖板Cover Plate		订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPTS2.5-2-GY-EC		
	橙Orange	TPTS2.5-2-OG-EC		
	蓝Blue			
补偿盖板Compensatory Plate		订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*		
标记支架Marker Stents		订货号Order NO.		
	灰Gray	*		
跨接件Jumper		订货信息Order Information		
位数Poles No.	颜色Colour	订货号Order NO.		
2	黄Yellow	TJA5.2-3		
3	黄Yellow	TJA5.2-4		
4	黄Yellow			
...	.....	TJA5.2-9		
9	黄Yellow	TJA5.2-10		
10	黄Yellow			
闪电标记Front Marker		订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.		
10位PCS		305801		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120		

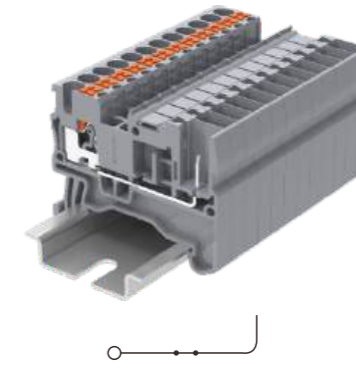

2.5mm<sup>2</sup> 一针一线接线端子  
Carrier terminal block

尺寸Size		技术参数Technical Parameter		
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		5.2	48.5	36.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	500	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12
其余参数Other Parameters		V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94				
剥线长度Strip length	[mm]	8-10		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TP2.5-2-1-GY		
	橙Orange	TP2.5-2-1-OG		
	蓝Blue	TP2.5-2-1-BU		
配套附件Accessory		订货信息Order Information		
盖板Cover Plate		订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP2.5-2-1-GY-EA		
	橙Orange	TP2.5-2-1-OG-EA		
	蓝Blue	TP2.5-2-1-BU-EA		
补偿盖板Compensatory Plate		订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*		
跨接件Jumper		订货信息Order Information		
位数Poles No.	颜色Colour	订货号Order NO.		
2	黄Yellow	TJA5.2-2		
3	黄Yellow	TJA5.2-3		
4	黄Yellow	TJA5.2-4		
...	.....	.....		
9	黄Yellow	TJA5.2-9		
10	黄Yellow	TJA5.2-10		
闪电标记Front Marker		订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.		
10位PCS		305801		
卷带标记(50米一卷) Winding marking (50 meters/roll)		订货号Order NO.		
		TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120		

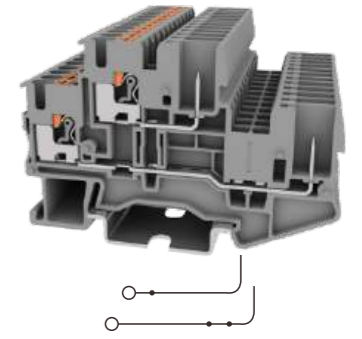

2.5mm<sup>2</sup> 双层一针一线接线端子  
Double carrier terminal block

尺寸Size		技术参数Technical Parameter		
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		5.2	72	45.8
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	500	300	
额定电流Rated Current	[A]	22	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-12	26-12	26-12
其余参数Other Parameters		V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94				
剥线长度Strip length	[mm]	8-10		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TPD2.5-2-1-GY		
	橙Orange	TPD2.5-2-1-OG		
	蓝Blue	TPD2.5-2-1-BU		
配套附件Accessory		订货信息Order Information		
盖板Cover Plate		订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TPD2.5-2-1-GY-EA		
	橙Orange	TPD2.5-2-1-OG-EA		
	蓝Blue	TPD2.5-2-1-BU-EA		
补偿盖板Compensatory Plate		订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*		
跨接件Jumper		订货信息Order Information		
位数Poles No.	颜色Colour	订货号Order NO.		
2	黄Yellow	TJA5.2-2		
3	黄Yellow	TJA5.2-3		
4	黄Yellow	TJA5.2-4		
...	.....	.....		
9	黄Yellow	TJA5.2-9		
10	黄Yellow	TJA5.2-10		
闪电标记Front Marker		订货号Order NO.		
5PCS 5片一条		WS-TP2.5-5		
正面标记Front Marker		订货号Order NO.		
10位PCS		305801		
卷带标记(50米一卷) Winding marking (50 meters/roll)		订货号Order NO.		
		TMZ9.6-50		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120		






2.5mm² 双层等电位一针一线接线端子  
Double level with equipotential bonder carrier terminal block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]
	8-10
产品Product	
颜色Colour	灰Gray
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	橙Orange
	蓝Blue
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray
	橙Orange
	蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	.....
9	黄Yellow
10	黄Yellow
闪电标记Front Marker	
5PCS 5片一条	WS-TP2.5-5
正面标记Front Marker	
10位PCS	*
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
正面标记和侧面标记Front And Side Marker	可提供印字服务Printing Service

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72	45.8
IEC	UL	
500	300	
22	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	[mm]	
	8-10	
订货信息Order Information		
产品Product	颜色Colour	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	
	橙Orange	
	蓝Blue	
配套附件Accessory		
端板Cover Plate	厚度2.2mm Thickness2.2mm	
	灰Gray	
	橙Orange	
	蓝Blue	
补偿端板Compensatory Plate	厚度1.00mm Thickness1.00mm	
	灰Gray	
跨接件Jumper	位数Poles No.	
	2	
	3	
	4	
	...	
	9	
	10	
闪电标记Front Marker	5PCS 5片一条	
正面标记Front Marker	10位PCS	
卷带标记 (50米一卷) Winding marking (50 meters/roll)	正面标记和侧面标记Front And Side Marker	

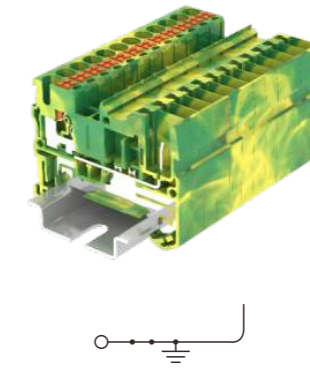

2.5mm² 一针一线接地端子  
Carrier ground terminal block



尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]
	8-10
产品Product	
颜色Colour	黄Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*
	*
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray
	橙Orange
	蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	.....
9	黄Yellow
10	黄Yellow
闪电标记Front Marker	
5PCS 5片一条	WS-TP2.5-5
正面标记Front Marker	
10位PCS	305801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
正面标记和侧面标记Front And Side Marker	可提供印字服务Printing Service

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	48.5	36.5
IEC	UL	
*	*	
*	*	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	[mm]	
	8-10	
订货信息Order Information		
产品Product	颜色Colour	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄Yellow green	
	*	
	*	
配套附件Accessory		
端板Cover Plate	厚度2.2mm Thickness2.2mm	
	灰Gray	
	橙Orange	
	蓝Blue	
补偿端板Compensatory Plate	厚度1.00mm Thickness1.00mm	
	灰Gray	
跨接件Jumper	位数Poles No.	
	2	
	3	
	4	
	...	
	9	
	10	
闪电标记Front Marker	5PCS 5片一条	
正面标记Front Marker	10位PCS	
卷带标记 (50米一卷) Winding marking (50 meters/roll)	正面标记和侧面标记Front And Side Marker	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72	45.8
IEC	UL	
*	*	
*	*	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	[mm]	
	8-10	
订货信息Order Information		
产品Product	颜色Colour	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄Yellow green	
	*	
	*	
配套附件Accessory		
端板Cover Plate	厚度2.2mm Thickness2.2mm	
	灰Gray	
	橙Orange	
	蓝Blue	
补偿端板Compensatory Plate	厚度1.00mm Thickness1.00mm	
	灰Gray	
跨接件Jumper	位数Poles No.	
	2	
	3	
	4	
	...	
	9	
	10	
闪电标记Front Marker	5PCS 5片一条	
正面标记Front Marker	10位PCS	
卷带标记 (50米一卷) Winding marking (50 meters/roll)	正面标记和侧面标记Front And Side Marker	



2.5mm<sup>2</sup> 插头  
Plug



尺寸Size		技术参数Technical Parameter		
[mm]		厚度Thickness	宽度Width	高度Height
		5.2	39.4	16.1
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	500	300	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-4	0.2-2.5	0.2-2.5
[AWG]		26-12	26-12	26-12
其余参数Other Parameters				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-10		
		订货信息Order Information		
所有位数为1的插头 皆为首位插头	位数Poles No.	颜色Colour	订货号Order NO.	
	1	灰	TPP2.5-1-GY	
	2	灰	TPP2.5-2-GY	
	...	...	...	
	17	灰	TPP2.5-17-GY	
	18	灰	TPP2.5-18-GY	
	1	橙Orange	TPP2.5-1-OG	
	1	蓝Blue	TPP2.5-1-BU	
	1	黄绿Yellow green	TPP2.5-1-PE	
	锁扣Lock Catch		订货号Order NO.	
		橙Orange	TPP2.5-PR	
跨接件Jumper				
位数Poles No.	颜色Colour	订货号Order NO.		
2	黄Yellow	*		
3	黄Yellow	*		
4	黄Yellow	*		
...	.....	.....		
9	黄Yellow	*		
10	黄Yellow	*		
闪电标记Lightning Marker		订货号Order NO.		
5PCS 5片一条		*		
正面标记Front Marker		订货号Order NO.		
10位PCS		*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120		

TP系列弹簧接线端子

TP Rail-mounted terminal blocks with spring-cage clamp



新品  
NEW

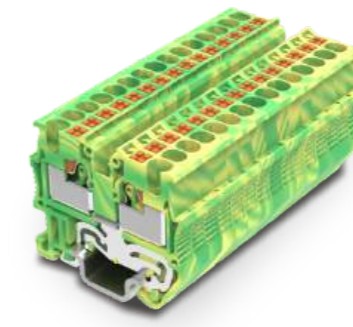

新品  
NEW

1.5mm<sup>2</sup> 一进一出直插式微型接线端子  
1.5mm<sup>2</sup> Conductor push-in mini terminal block

2.5mm<sup>2</sup> 一进一出直插式微型接线端子  
2.5mm<sup>2</sup> Mini 1-1 feed-through terminal block

1.5mm<sup>2</sup> 一进一出直插式微型接地端子  
1.5mm<sup>2</sup> Mini ground terminal block

2.5mm<sup>2</sup> 一进一出直插式微型接地端子  
2.5mm<sup>2</sup> Mini ground terminal block

尺寸Size	
注: 安装NS15/5.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	31	26.4
IEC	UL	
500	300	
17.5	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	8-10	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	36	32.1
IEC	UL	
500	300	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	8-10	

尺寸Size	
注: 安装NS15/5.5导轨后的高度 Note: Height With DIN Rail NS 15/5.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	31	26.4
IEC	UL	
500	600	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	8-10	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	36	31.1
IEC	UL	
500		
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-2.5
26-12	26-12	26-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	8-10	

产品Product		颜色Colour
适配NS 15/5.5导轨 Can Be Used For DIN Rail NS 15/5.5		灰Gray
		橙Orange
		蓝Blue
端板Cover Plate		
		灰Gray
厚度2.2mm Thickness2.2mm		橙Orange
		蓝Blue
补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm		灰Gray
跨接件Jumper		
位数Poles No.	颜色Colour	
2	黄Yellow	
3	黄Yellow	
...	黄Yellow	
10	.....	
... (10位以上整数位)	黄Yellow	
50	黄Yellow	
闪电标记Front Marker		
5PCS 5片一条		*
正面标记Front Marker		
10位PCS		*
正面标记和侧面标记Front And Side Marker		
可提供印字服务Printing Service		TMB3.5-100





订货信息Order Information	
订货号Order NO.	TPM1.5-2-GY
	TPM1.5-2-OG
	TPM1.5-2-BU
配套附件Accessory	
订货号Order NO.	TPM1.5-2-GY-EA
	TPM1.5-2-OG-EA
	TPM1.5-2-BU-EA
订货号Order NO.	*
跨接件Jumper	
订货号Order NO.	TJA3.5-2
	TJA3.5-3
	.....
	TJA3.5-10
	.....
	TJA3.5-50
	*
闪电标记Front Marker	
订货号Order NO.	*
正面标记Front Marker	
订货号Order NO.	*
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB3.5-100

订货信息Order Information	
订货号Order NO.	TPM2.5-2-GY
	TPM2.5-2-OG
	TPM2.5-2-BU
配套附件Accessory	
订货号Order NO.	TPM2.5-2-GY-EA
	TPM2.5-2-OG-EA
	TPM2.5-2-BU-EA
订货号Order NO.	*
跨接件Jumper	
订货号Order NO.	TJA5.2-2
	TJA5.2-3
	.....
	TJA5.2-10
	.....
	*
闪电标记Front Marker	
订货号Order NO.	WS-TP2.5-5
正面标记Front Marker	
订货号Order NO.	*
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB5.2-120

产品Product		颜色Colour
适配NS 15/5.5导轨 Can Be Used For DIN Rail NS 35/7.5		黄绿Yellow green
		*
		*
		*
端板Cover Plate		
		灰Gray
厚度2.2mm Thickness2.2mm		橙Orange
		蓝Blue
补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm		灰Gray
跨接件Jumper		
位数Poles No.	颜色Colour	
2	黄Yellow	
3	黄Yellow	
...	黄Yellow	
10	.....	
... (10位以上整数位)	黄Yellow	
50	黄Yellow	
闪电标记Front Marker		
5PCS 5片一条		*
正面标记Front Marker		
10位PCS		*
正面标记和侧面标记Front And Side Marker		
可提供印字服务Printing Service		TMB3.5-100

订货信息Order Information	
订货号Order NO.	TPM1.5-2-PE
	*
	*
	*
配套附件Accessory	
订货号Order NO.	TPM1.5-2-GY-EA
	TPM1.5-2-OG-EA
	TPM1.5-2-BU-EA
订货号Order NO.	*
跨接件Jumper	
订货号Order NO.	*
	*
	*
	.....
	*
	*
	.....
	*
闪电标记Front Marker	
订货号Order NO.	*
正面标记Front Marker	
订货号Order NO.	WS-TP2.5-5
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	*

订货信息Order Information	
订货号Order NO.	TPM2.5-2-PE
	*
	*
	*
配套附件Accessory	
订货号Order NO.	TPM2.5-2-GY-EA
	TPM2.5-2-OG-EA
	TPM2.5-2-BU-EA
订货号Order NO.	*
跨接件Jumper	
订货号Order NO.	*
	*
	*
	.....
	*
	*
	.....
	*
闪电标记Front Marker	
订货号Order NO.	WS-TP2.5-5
正面标记Front Marker	
订货号Order NO.	*
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	TMB5.2-120

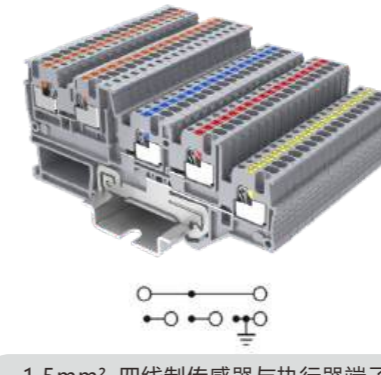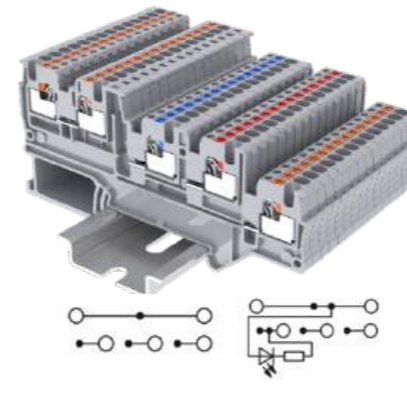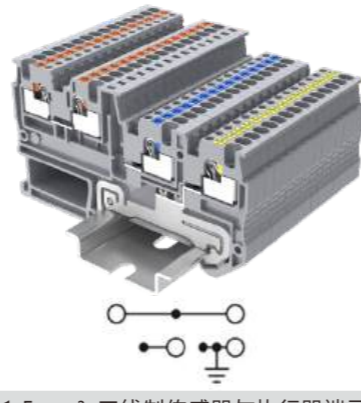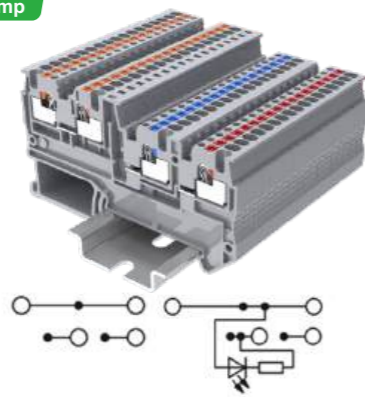

1.5mm<sup>2</sup> 三线制传感器与执行器端子  
3-wire Sensor /Actuator terminal block

1.5mm<sup>2</sup> 三线制传感器与执行器端子  
带接地保护  
3-wire Sensor /Actuator terminal block  
with PE protection

1.5mm<sup>2</sup> 四线制传感器与执行器端子  
4-wire Sensor /Actuator terminal block

1.5mm<sup>2</sup> 四线制传感器与执行器端子  
带接地保护  
4-wire Sensor /Actuator terminal block  
with PE protection

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	74.5	41.5
IEC	UL	
250	*	
13.5	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	74.5	41.5
IEC	UL	
250	*	
13.5	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	90.8	41.5
IEC	UL	
250	*	
13.5	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
V0		
8-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	90.8	41.5
IEC	UL	
250	*	
13.5	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.0
26-14	26-14	26-14
V0		
8-10		

产品Product		颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		灰Gray
		灰, 带红灯With red light
		灰, 带绿灯With green light
		橙Orange

订货信息Order Information	
订货号Order NO.	TPIO1.5-S-3
	TPIO1.5-S-3-LR24
	TPIO1.5-S-3-LG24
	*

订货信息Order Information	
订货号Order NO.	TPIO1.5-S-3-PE
	*
	*

订货信息Order Information	
订货号Order NO.	TPIO1.5-S-4
	TPIO1.5-S-4-LR24
	TPIO1.5-S-4-LG24
	*

订货信息Order Information	
订货号Order NO.	TPIO1.5-S-4-PE
	*
	*

端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray
	橙Orange
	蓝Blue

配套附件Accessory	
订货号Order NO.	TPIO1.5-S-3-GY-EA
	TPIO1.5-S-3-OG-EA
	TPIO1.5-S-3-BU-EA

配套附件Accessory	
订货号Order NO.	TPIO1.5-S-3-GY-EA
	TPIO1.5-S-3-OG-EA
	TPIO1.5-S-3-BU-EA

配套附件Accessory	
订货号Order NO.	TPIO1.5-S-4-GY-EA
	TPIO1.5-S-4-OG-EA
	TPIO1.5-S-4-BU-EA

配套附件Accessory	
订货号Order NO.	TPIO1.5-S-4-GY-EA
	TPIO1.5-S-4-OG-EA
	TPIO1.5-S-4-BU-EA

补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray

订货信息Order Information	
订货号Order NO.	*

订货信息Order Information	
订货号Order NO.	*

订货信息Order Information	
订货号Order NO.	*

订货信息Order Information	
订货号Order NO.	*

跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
...	黄Yellow
10	.....
... (10位以上整数位)	黄Yellow
50	黄Yellow

订货信息Order Information	
订货号Order NO.	TJA3.5-2
	TJA3.5-3
	.....
	TJA3.5-10
	.....
	TJA3.5-50

订货信息Order Information	
订货号Order NO.	TJA3.5-2
	TJA3.5-3
	.....
	TJA3.5-10
	.....
	TJA3.5-50

订货信息Order Information	
订货号Order NO.	TJA3.5-2
	TJA3.5-3
	.....
	TJA3.5-10
	.....
	TJA3.5-50

订货信息Order Information	
订货号Order NO.	TJA3.5-2
	TJA3.5-3
	.....
	TJA3.5-10
	.....
	TJA3.5-50

闪电标记Front Marker	
5PCS 5片一条	WS-TP1.5-5

订货信息Order Information	
订货号Order NO.	WS-TP1.5-5

订货信息Order Information	
订货号Order NO.	WS-TP1.5-5

订货信息Order Information	
订货号Order NO.	WS-TP1.5-5

订货信息Order Information	
订货号Order NO.	WS-TP1.5-5

正面标记和侧面标记Front And Side Marker	
10位PCS	*
可提供印字服务Printing Service	TMB3.5-100

订货信息Order Information	
订货号Order NO.	*
	TMB3.5-100





订货信息Order Information	
订货号Order NO.	*
	TMB3.5-100

订货信息Order Information	
订货号Order NO.	*
	TMB3.5-100

订货信息Order Information	
订货号Order NO.	*
	TMB3.5-100

TP系列弹簧接线端子

TP Rail-mounted terminal blocks with spring-cage clamp

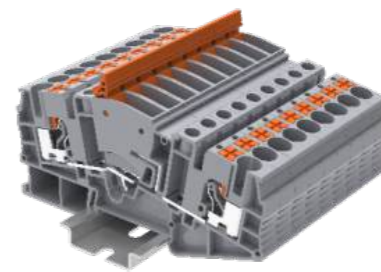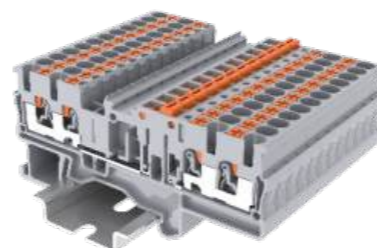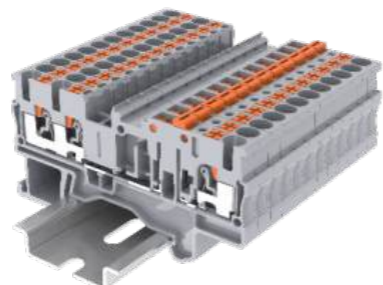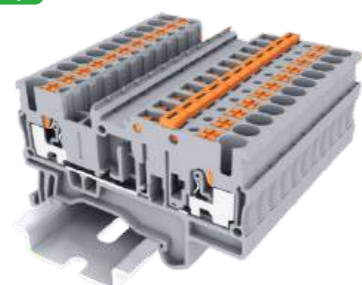

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]
	8-10
产品Product	
颜色Colour	灰Gray
	橙Orange
	蓝Blue
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	
盖板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray
	橙Orange
	蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	.....
9	黄Yellow
10	黄Yellow
闪电标记Lightning Marker	
5PCS 5片一条	
正面标记Front Marker	
10位PCS	
卷带标记(50米一卷) Winding marking (50 meters/roll)	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

2.5mm²一进一出带刀闸正面接线 1-1 feed through knife disconnect terminal blocks		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	61.7	33.5
IEC	UL	
400	300	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
订货信息Order Information		
订货号Order NO.	TPK2.5-2-GY	TPK2.5-2-OG
	TPK2.5-2-OG	TPK2.5-2-BU
配套附件Accessory		
订货号Order NO.	TPK2.5-2-GY-EA	TPK2.5-2-OG-EA
	TPK2.5-2-OG-EA	TPK2.5-2-BU-EA
	*	*
闪电标记Lightning Marker		
订货号Order NO.	WS-TP2.5-5	
正面标记Front Marker		
订货号Order NO.	305801	
卷带标记(50米一卷) Winding marking (50 meters/roll)		
订货号Order NO.	TMZ9.6-50	
正面标记和侧面标记Front And Side Marker		
订货号Order NO.	TMB5.2-120	

2.5mm²两进一出带刀闸正面接线 2-1 feed through knife disconnect terminal blocks		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	71.9	33.5
IEC	UL	
400	300	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
订货信息Order Information		
订货号Order NO.	TPK2.5-3-GY	TPK2.5-3-OG
	TPK2.5-3-OG	TPK2.5-3-BU
配套附件Accessory		
订货号Order NO.	TPK2.5-3-GY-EA	TPK2.5-3-OG-EA
	TPK2.5-3-OG-EA	TPK2.5-3-BU-EA
	*	*
闪电标记Lightning Marker		
订货号Order NO.	WS-TP2.5-5	
正面标记Front Marker		
订货号Order NO.	305801	
卷带标记(50米一卷) Winding marking (50 meters/roll)		
订货号Order NO.	TMZ9.6-50	
正面标记和侧面标记Front And Side Marker		
订货号Order NO.	TMB5.2-120	

2.5mm²两进两出带刀闸正面接线 2-2 feed through knife disconnect terminal blocks		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	82.2	33.5
IEC	UL	
400	300	
20	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
订货信息Order Information		
订货号Order NO.	TPK2.5-4-GY	TPK2.5-4-OG
	TPK2.5-4-OG	TPK2.5-4-BU
配套附件Accessory		
订货号Order NO.	TPK2.5-4-GY-EA	TPK2.5-4-OG-EA
	TPK2.5-4-OG-EA	TPK2.5-4-BU-EA
	*	*
闪电标记Lightning Marker		
订货号Order NO.	WS-TP2.5-5	
正面标记Front Marker		
订货号Order NO.	305801	
卷带标记(50米一卷) Winding marking (50 meters/roll)		
订货号Order NO.	TMZ9.6-50	
正面标记和侧面标记Front And Side Marker		
订货号Order NO.	TMB5.2-120	


6mm²闸刀试验端子 Disconnect test terminal		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.2	103.2	48.5
IEC	UL	
500	600	
30	30	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-6
20-8	20-8	20-8
订货信息Order Information		
订货号Order NO.	TPME6-2-GY	
配套附件Accessory		
订货号Order NO.	TPME6-2-JP-GY-EA	
	*	*
闪电标记Lightning Marker		
订货号Order NO.	WS-TP6-5	
正面标记Front Marker		
订货号Order NO.	308801	
卷带标记(50米一卷) Winding marking (50 meters/roll)		
订货号Order NO.	TMZ9.6-50	
正面标记和侧面标记Front And Side Marker		
订货号Order NO.	TMB8.2-50	

6mm²闸刀试验端子带测试柱 Disconnect test terminal with test tube		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.2	103.2	48.5
IEC	UL	
500	600	
30	30	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-6
20-8	20-8	20-8
订货信息Order Information		
订货号Order NO.	TPME6-2-JP-GY	
配套附件Accessory		
订货号Order NO.	TPME6-2-JP-GY-EA	
	*	*
闪电标记Lightning Marker		
订货号Order NO.	WS-TP6-5	
正面标记Front Marker		
订货号Order NO.	308801	
卷带标记(50米一卷) Winding marking (50 meters/roll)		
订货号Order NO.	TMZ9.6-50	
正面标记和侧面标记Front And Side Marker		
订货号Order NO.	TMB8.2-50	




不提供保险管，图片只供参考使用  
No fuse is provided. The picture is for reference only

4mm² F型扁平保险丝端子  
Terminal block with flat F-fuse

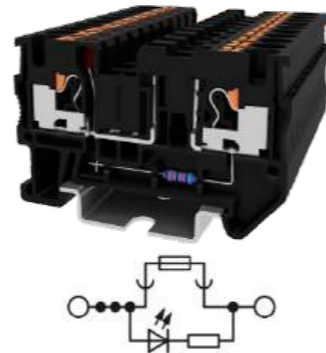


不提供保险管，图片只供参考使用  
No fuse is provided. The picture is for reference only

4mm² F型扁平带LED灯保险丝端子  
Terminal block with led and flat F-fuse





不提供保险管，图片只供参考使用  
No fuse is provided. The picture is for reference only

6mm² C型扁平保险丝端子  
Terminal block with flat C-fuse



不提供保险管，图片只供参考使用  
No fuse is provided. The picture is for reference only

6mm² C型扁平带LED灯保险丝端子  
Terminal block with led and flat C-fuse




4mm² 悬臂式分断端子  
4mm² Lever-type disconnect terminal block

		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter						
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height				
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		[mm]	6.2	55.9	35.25	6.2	55.9	35.25	8.2	74.1	42.2	8.2	74.1	42.2	6.2	55.9	35.25
<b>额定参数Rated Parameters</b>		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL		
额定电压Rated Voltage		[V]	400	300		12-250	12-250		400	300		12-250	12-250		500	300	
额定电流Rated Current		[A]	10	10		10	10		25	25		25	25		20	16	
<b>接线容量Wire Range</b>			刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
		[mm²]	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6	0.5-10	0.5-6	0.5-6	0.2-4	0.2-4	0.2-4
		[AWG]	24-10	24-10	24-10	24-10	24-10	24-10	20-8	20-8	20-8	20-8	20-8	20-8	24-10	24-10	24-10
<b>其余参数Other Parameters</b>			V0			V0			V0			V0					
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			10-12			10-12			10-12			12			10-12		
剥线长度Strip length		[mm]															
<b>产品Product</b>		颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		黑Black	TP4-FSI/F-BK			TP4-FSI/F-LED12-L/R TP4-FSI/F-LED24-L/R TP4-FSI/F-LED48-L/R TP4-FSI/F-LED250-L/R			TP6-FSI/F-BK			TP6-FSI/F-LED12-L/R TP6-FSI/F-LED24-L/R TP6-FSI/F-LED48-L/R TP6-FSI/F-LED220-L/R			TP4-HEDI		
			*			*			*			*			*		
			*			*			*			*			*		
<b>盖板Cover Plate</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm		灰Gray	TP4-FSI/F-GY-EA			TP4-FSI/F-GY-EA			*			*			TP4-FSI/F-GY-EA		
		橙Orange	TP4-FSI/F-OG-EA			TP4-FSI/F-OG-EA			*			*			*		
		蓝Blue	TP4-FSI/F-BU-EA			TP4-FSI/F-BU-EA			*			*			*		
<b>补偿端板Compensatory Plate</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm		灰Gray	*			*			*			*			*		
<b>跨接件Jumper</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
位数Poles No.		颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
2		黄Yellow	TJA6.2-2			TJA6.2-2			TJA8.2-2			TJA8.2-2			TJA6.2-2		
3		黄Yellow	TJA6.2-3			TJA6.2-3			TJA8.2-3			TJA8.2-3			TJA6.2-3		
4		黄Yellow	TJA6.2-4			TJA6.2-4			TJA8.2-4			TJA8.2-4			TJA6.2-4		
...		.....	.....			.....			.....			.....			.....		
9		黄Yellow	TJA6.2-9			TJA6.2-9			TJA8.2-9			TJA8.2-9			TJA6.2-9		
10		黄Yellow	TJA6.2-10			TJA6.2-10			TJA8.2-10			TJA8.2-10			TJA6.2-10		
<b>闪电标记Lightning Marker</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5PCS 5片一条			*			*			WS-TP6-5			WS-TP6-5			*		
<b>正面标记Front Marker</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS			*			*			*			*			*		
<b>正面标记和侧面标记Front And Side Marker</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service			TMB6.2-100			TMB6.2-100			TMB8.2-50			TMB8.2-50			TMB6.2-100		


TP系列弹簧接线端子

TP Rail-mounted terminal blocks with spring-cage clamp




不提供保险管，图片仅供参考使用  
No fuse is provided. The picture is for reference only

4mm² 悬臂式分断端子,可接5x20mmG型保险丝  
4mm² Lever-type disconnect terminal block for 5x20mm G fuse



不提供保险管，图片仅供参考使用  
No fuse is provided. The picture is for reference only

4mm² 悬臂式带发光二极管分断端子,可接5x20mmG型保险丝  
4mm² Lever-type disconnect terminal block for 5x20mm G fuse with LED





新品 NEW

4mm²刀闸分断接线端子  
4mm² Knife-disconnect terminal block



新品 NEW

4mm²分断接线端子  
4mm² Disconnect terminal block




新品 NEW

不提供保险管，图片仅供参考使用  
No fuse is provided. The picture is for reference only

2.5mm²二进二出带二极管端子  
2.5mm² 2-2 feed terminal block with Diode


尺寸Size		技术参数Technical Parameter			技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
[mm]		6.2	55.9	35.25	6.2	55.9	35.25
额定参数Rated Parameters		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	400	300		24-250	24-250	
额定电流Rated Current	[A]	6.3	6.3		6.3	6.3	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]		0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4
[AWG]		24-10	24-10	24-10	24-10	24-10	24-10
其余参数Other Parameters		V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	10-12			10-12		
产品Product		订货信息Order Information			订货信息Order Information		
颜色Colour	黑Black	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		TP4-HESI(5X20)-BK(黑色)			TP4-HESI(5x20)-LED24-BK		
		TP4-HESI(5X20)-GY(灰色)			TP4-HESI(5x20)-LED220-BK		
配套附件Accessory		配套附件Accessory			配套附件Accessory		
盖板Cover Plate		订货号Order NO.			订货号Order NO.		
厚度2.2mm Thickness2.2mm	灰Gray	TP4-FSI/F-GY-EA			TP4-FSI/F-GY-EA		
	橙Orange	*			*		
	蓝Blue	*			*		
补偿端板Compensatory Plate		订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	灰Gray	*			*		
跨接件Jumper		订货号Order NO.			订货号Order NO.		
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	黄Yellow	TJA6.2-2			TJA6.2-2		
3	黄Yellow	TJA6.2-3			TJA6.2-3		
4	黄Yellow	TJA6.2-4			TJA6.2-4		
...	.....	.....			.....		
9	黄Yellow	TJA6.2-9			TJA6.2-9		
10	黄Yellow	TJA6.2-10			TJA6.2-10		
闪电标记Lightning Marker		订货号Order NO.			订货号Order NO.		
5PCS 5片一条		*			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.		
10位PCS		*			*		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB6.2-100			TMB6.2-100		

技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
6.2	55.9	36.95	6.2	55.9	35.25	5.2	72.2	35.3
IEC	UL		IEC	UL		IEC	UL	
500	300		500	300		800	300	
20	20		20	20		0.5	0.5	
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
21-10	21-10	21-10	21-10	21-10	21-10	26-12	26-12	26-12
订货信息Order Information			订货信息Order Information			订货信息Order Information		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TP4-MT-GY			TP4-TG-GY			TP2.5-4R/L-GY		
TP4-MT-OG			TP4-TG-OG			TP2.5-4L/R-GY		
TP4-MT-BU			TP4-TG-BU					
配套附件Accessory			配套附件Accessory			配套附件Accessory		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TP4-FSI/F-GY-EA			TP4-FSI/F-GY-EA			TC1.5-4-GY-EA		
TP4-FSI/F-OG-EA			TP4-FSI/F-OG-EA			*		
TP4-FSI/F-BU-EA			TP4-FSI/F-BU-EA			*		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			*		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TJA6.2-2			TJA6.2-2			TJA5.2-2		
TJA6.2-3			TJA6.2-3			TJA5.2-3		
TJA6.2-4			TJA6.2-4			TJA5.2-4		
.....			.....			.....		
TJA6.2-9			TJA6.2-9			TJA5.2-9		
TJA6.2-10			TJA6.2-10			TJA5.2-10		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			WS-TP2.5-5		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			*		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TMB6.2-100			TMB6.2-100			TMB5.2-120		

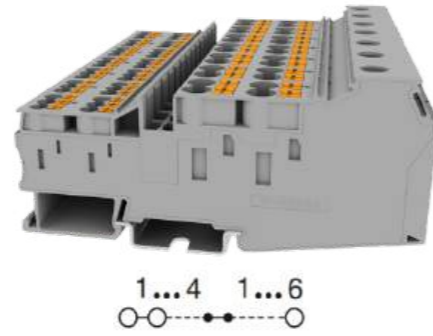

35 mm² 电位分配接线端子  
Potential distribution terminal block

尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			
	厚度Thickness			宽度Width			高度Height			
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	16.3			110.37			50.3		
额定参数Rated Parameters	螺钉连接			4个直插自锁接线位, 6 mm²			6个直插自锁接线位, 2.5 mm²			
	IEC	UL		IEC	UL		IEC	UL		
额定电压Rated Voltage	[V]	1000	*	1000	*	1000	*			
额定电流Rated Current	[A]	105	*	41	*	24	*			
接线容量Wire Range	刚性Solid 柔性Fine Stranded 带冷压头Furrule			刚性Solid 柔性Fine Stranded 带冷压头Furrule			刚性Solid 柔性Fine Stranded 带冷压头Furrule			
	[mm²]	1.5-50	1.5-50	1.5-35	0.5-10	0.5-6	0.5-6	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	16-1/0	16-1/0	16-1/0	20-8	20-10	20-10	26-12	26-14	26-14
螺钉类型Screws Type		M6			*					
扭矩Torque		2.5N·m			*					
其余参数Other Parameters										
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length	[mm]	18			12			8-10		
订货信息Order Information										
产品Product	颜色Colour	订货号Order NO.								
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray 蓝Blue	TPU35/6/2.5-11-GY TPU35/6/2.5-11-BU *								
跨接件Jumper										
位数Poles No.	颜色Colour	订货号Order NO.								
2	黄Yellow	TJA8.2-2								
3	黄Yellow	TJA8.2-3								
4	黄Yellow	TJA8.2-4								
...	.....	.....								
9	黄Yellow	TJA8.2-9								
10	黄Yellow	TJA8.2-10								
闪电标记Lightning Marker		订货号Order NO.								
5PCS 5片一条		*								
正面标记Front Marker		订货号Order NO.								
10位PCS		316801								
卷带标记 (50米一卷)Winding marking (50 meters/roll)		TMZ9.6-50								
正面标记和侧面标记Front And Side Marker		订货号Order NO.								
可提供印字服务Printing Service		TMB5.2-120								

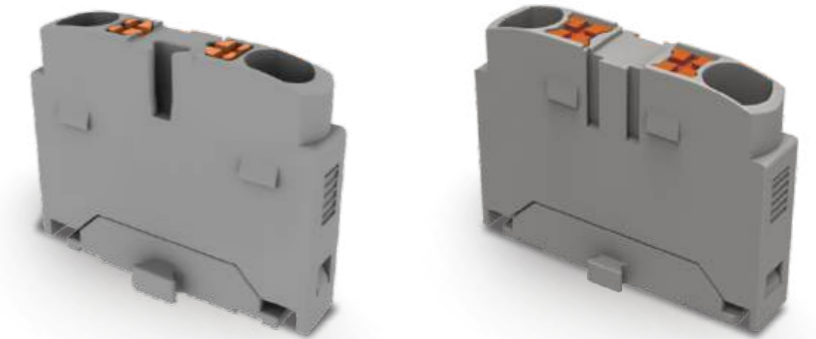


1.5mm²直插式配电块  
Push-in Type Power Distribution Block  
1.5mm² Terminal Points

2.5mm²直插式配电块  
Push-in Type Power Distribution Block  
2.5mm² Terminal Points

尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			
	厚度Thickness	长度Length	高度Height	厚度Thickness	长度Length	高度Height	
	[mm]	4.2	21.6	17.7	5.2	28.6	21.7
额定参数Rated Parameters	IEC			UL			
	额定电压Rated Voltage	[V]	450	300	450	300	
额定电流Rated Current	[A]	17.5	15	24	20		
接线容量Wire Range	刚性Solid 柔性Fine Stranded 带冷压头Furrule			刚性Solid 柔性Fine Stranded 带冷压头Furrule			
	[mm²]	0.2-2.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5
	[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
其余参数Other Parameters							
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	8-10			8-10		
订货信息Order Information							
产品Product	颜色Colour	订货号Order NO.		订货号Order NO.			
2个接线点	灰Gray	TPA1.5-2-GY		TPA2.5-2-GY			
4个接线点		TPA1.5-4-GY		*			
6个接线点		TPA1.5-6-GY		TPA2.5-6-GY			
12个接线点	橙Orange	TPA1.5-12-GY		TPA2.5-12-GY			
18个接线点		TPA1.5-18-GY		TPA2.5-18-GY			
2个接线点		TPA1.5-2-OG		TPA2.5-2-OG			
4个接线点	蓝Blue	TPA1.5-4-OG		*			
6个接线点		TPA1.5-6-OG		TPA2.5-6-OG			
12个接线点		TPA1.5-12-OG		TPA2.5-12-OG			
18个接线点	蓝Blue	TPA1.5-18-OG		TPA2.5-18-OG			
2个接线点		TPA1.5-2-BU		TPA2.5-2-BU			
4个接线点		TPA1.5-4-BU		*			
6个接线点	蓝Blue	TPA1.5-6-BU		TPA2.5-6-BU			
12个接线点		TPA1.5-12-BU		TPA2.5-12-BU			
18个接线点		TPA1.5-18-BU		TPA2.5-18-BU			
配套附件Accessory							
		订货号Order NO.		订货号Order NO.			
大导轨转换器 Din rail adapter for NS35	灰Gray	TPA1.5 NS 35		TPA NS35			
小导轨转换器 Din rail adapter for NS15	灰Gray	TPA1.5 NS 15		TPA NS15			
导轨卡板 Din rail bracket	灰Gray	TPA1.5 NS35T		TPA NS35T			
螺钉法兰 Flange for screw mounting	灰Gray	TPA1.5 NF		TPA2.5 NF			
法兰标记支架 Marking carrier	灰Gray	TPA-KLM3		TPA-KLM3			



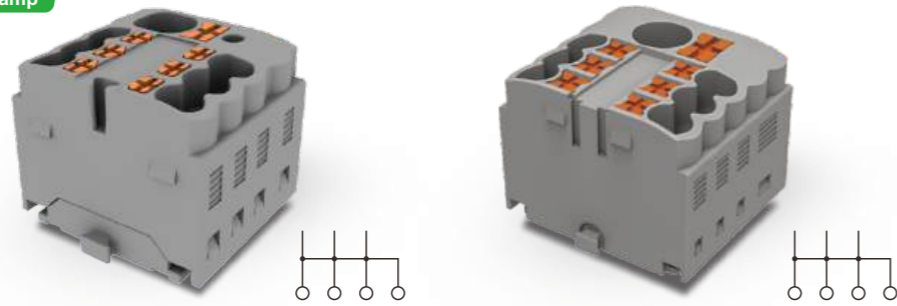

1.5mm²直插式带输入配电块  
Push-in Type Power Distribution Block  
1.5mm² Terminal Points

2.5mm²直插式带输入配电块  
Push-in Type Power Distribution Block  
2.5mm² Terminal Points


尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter		
	厚度Thickness	长度Length	高度Height	厚度Thickness	长度Length	高度Height
[mm]	19.2	21.6	17.7	25.6	28.6	21.7
<b>额定参数Rated Parameters</b>	IEC	UL		IEC	UL	
<b>输入端Input</b>						
额定电压Rated Voltage [V]	450	300		450	300	
额定电流Rated Current [A]	32	30		41	50	
<b>输出端Output</b>						
额定电压Rated Voltage [V]	450	300		450	300	
额定电流Rated Current [A]	17.5	20		24	20	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
<b>输入端Input</b>						
[mm²]	0.2-6	0.2-4	0.2-4	0.5-10	0.5-6	0.5-6
[AWG]	24-10	24-10	24-10	20-8	20-8	20-8
<b>输出端Output</b>						
[mm²]	0.2-2.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-14	26-14	26-14	26-12	26-12	26-12
<b>其余参数Other Parameters</b>						
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0		
<b>输入端Input</b>						
剥线长度Strip length [mm]	10-12			10-12		
<b>输出端Output</b>						
剥线长度Strip length [mm]	8-10			8-10		



订货信息Order Information

产品Product	颜色Colour	订货号Order NO.	订货号Order NO.
7个接线点	灰Gray	TPA4/1.5-7-GY	TPA6/2.5-7-GY
13个接线点		TPA4/1.5-13-GY	TPA6/2.5-13-GY
19个接线点		TPA4/1.5-19-GY	TPA6/2.5-19-GY
7个接线点	橙Orange	TPA4/1.5-7-OG	TPA6/2.5-7-OG
13个接线点		TPA4/1.5-13-OG	TPA6/2.5-13-OG
19个接线点		TPA4/1.5-19-OG	TPA6/2.5-19-OG
7个接线点	蓝Blue	TPA4/1.5-7-BU	TPA6/2.5-7-BU
13个接线点		TPA4/1.5-13-BU	TPA6/2.5-13-BU
19个接线点		TPA4/1.5-19-BU	TPA6/2.5-19-BU

配套附件Accessory

	颜色Colour	订货号Order NO.	订货号Order NO.
<b>大导轨转换器</b> Din rail adapter for NS35	灰Gray	TPA1.5 NS 35	TPA NS 35
<b>小导轨转换器</b> Din rail adapter for NS15	灰Gray	TPA1.5 NS 15	TPA NS 15
<b>导轨卡板</b> Din rail bracket	灰Gray	TPA1.5 NS35T	TPA NS 35T
<b>螺钉法兰</b> Flange for screw mounting	灰Gray	TPA1.5 NF	TPA2.5 NF
<b>法兰标记支架</b> Marking carrier	灰Gray	TPA-KLM3	TPA-KLM3

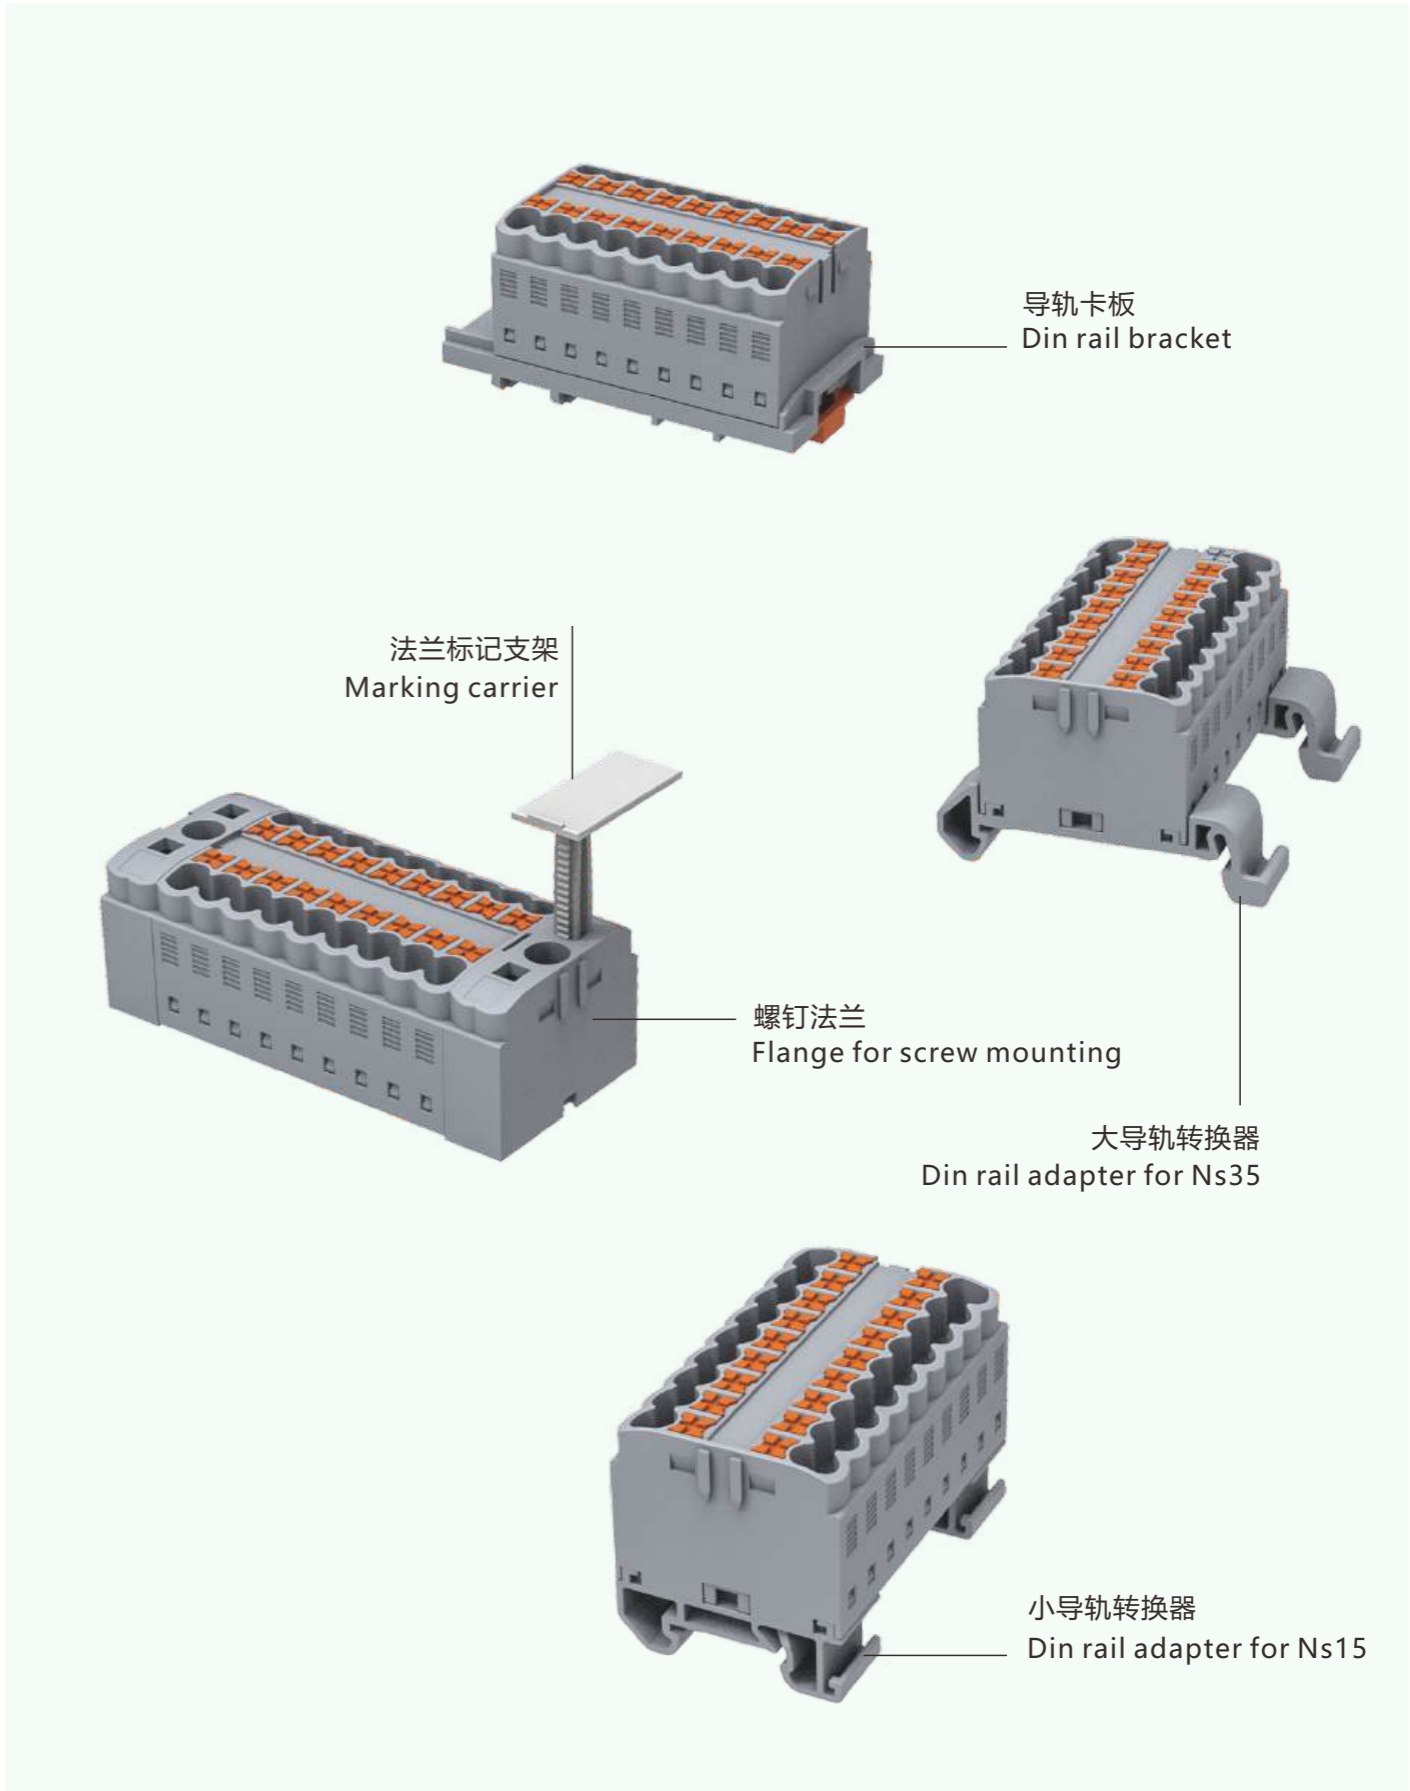



2.5mm², 一进一出侧面接线端子  
1-1 Feed Through 2.5mm²  
Terminal Block of Side-entry

4mm², 一进一出侧面接线端子  
1-1 Feed Through 4mm²  
Terminal Block of Side-entry

6mm², 一进一出侧面接线端子  
1-1 Feed Through 6mm²  
Terminal Block of Side-entry

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
5.2	50.5	35.2
IEC	UL	
1000	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
V0		
8-10		

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
6.2	50.5	35.2
IEC	UL	
1000	600	
32	30	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
26-10	26-10	26-10
V0		
9-11		

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
8.2	61	42.2
IEC	UL	
1000	600	
41	40	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-6
20-8	20-8	20-8
V0		
10-12		

订货信息Order Information

订货号Order NO.
TPV2.5-2-GY
TPV2.5-2-OG
TPV2.5-2-BU

订货信息Order Information

订货号Order NO.
TPV4-2-GY
TPV4-2-OG
TPV4-2-BU

订货信息Order Information

订货号Order NO.
TPV6-2-GY
TPV6-2-OG
TPV6-2-BU

配套附件Accessory

订货号Order NO.
TPV2.5-2-GY-EA
TPV2.5-2-OG-EA
TPV2.5-2-BU-EA

配套附件Accessory

订货号Order NO.
TPV2.5-2-GY-EA
TPV2.5-2-OG-EA
TPV2.5-2-BU-EA

配套附件Accessory

订货号Order NO.
TPV6-2-GY-EA
TPV6-2-OG-EA
TPV6-2-BU-EA

补偿端板Compensatory Plate

订货号Order NO.
*

补偿端板Compensatory Plate

订货号Order NO.
*

补偿端板Compensatory Plate

订货号Order NO.
*

跨接件Jumper

订货号Order NO.
--------------

跨接件Jumper

订货号Order NO.
--------------

跨接件Jumper

订货号Order NO.
--------------

位数Poles No.

颜色Colour	订货号Order NO.
黄Yellow	TJA5.2-2
黄Yellow	TJA5.2-3
黄Yellow	TJA5.2-4
.....	.....
黄Yellow	TJA5.2-9
黄Yellow	TJA5.2-10

位数Poles No.

颜色Colour	订货号Order NO.
黄Yellow	TJA6.2-2
黄Yellow	TJA6.2-3
黄Yellow	TJA6.2-4
.....	.....
黄Yellow	TJA6.2-9
黄Yellow	TJA6.2-10

位数Poles No.

颜色Colour	订货号Order NO.
黄Yellow	TJA8.2-2
黄Yellow	TJA8.2-3
黄Yellow	TJA8.2-4
.....	.....
黄Yellow	TJA8.2-9
黄Yellow	TJA8.2-10

闪电标记Front Marker

订货号Order NO.
*

闪电标记Front Marker

订货号Order NO.
*

闪电标记Front Marker

订货号Order NO.
*

正面标记Front Marker

订货号Order NO.
305801

正面标记Front Marker

订货号Order NO.
306801

正面标记Front Marker

订货号Order NO.
308801

卷带标记(50米一卷) Winding marking (50 meters/roll)

订货号Order NO.
TMZ9.6-50

卷带标记(50米一卷) Winding marking (50 meters/roll)

订货号Order NO.
TMZ9.6-50

卷带标记(50米一卷) Winding marking (50 meters/roll)

订货号Order NO.
TMZ9.6-50

正面标记和侧面标记Front And Side Marker




订货号Order NO.
TMB5.2-120

正面标记和侧面标记Front And Side Marker

订货号Order NO.
TMB6.2-100

正面标记和侧面标记Front And Side Marker

订货号Order NO.
TMB8.2-50



2.5mm², 一进一出侧面接地端子  
1-1 Feed Through 2.5mm² GROUND  
Terminal Block of Side-entry

4mm², 一进一出侧面接地端子  
1-1 Feed Through 4mm² GROUND  
Terminal Block of Side-entry

6mm², 一进一出侧面接地端子  
1-1 Feed Through 6mm² GROUND  
Terminal Block of Side-entry

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
5.2	50.5	35.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
V0		
8-10		

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
6.2	50.5	35.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
26-10	26-10	26-10
V0		
9-11		

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
8.2	61	42.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-6
20-8	20-8	20-8
V0		
10-12		

订货信息Order Information

订货号Order NO.
TPV2.5-2-PE
*
*

订货信息Order Information

订货号Order NO.
TPV4-2-PE
*
*

订货信息Order Information

订货号Order NO.
TPV6-2-PE
*
*

配套附件Accessory

订货号Order NO.
TPV2.5-2-GY-EA
TPV2.5-2-OG-EA
TPV2.5-2-BU-EA

配套附件Accessory

订货号Order NO.
TPV2.5-2-GY-EA
TPV2.5-2-OG-EA
TPV2.5-2-BU-EA

配套附件Accessory

订货号Order NO.
TPV6-2-GY-EA
TPV6-2-OG-EA
TPV6-2-BU-EA

补偿端板Compensatory Plate

订货号Order NO.
*

补偿端板Compensatory Plate

订货号Order NO.
*

补偿端板Compensatory Plate

订货号Order NO.
*

跨接件Jumper

订货号Order NO.
--------------

跨接件Jumper

订货号Order NO.
--------------

跨接件Jumper

订货号Order NO.
--------------

位数Poles No.

颜色Colour	订货号Order NO.
黄Yellow	TJA5.2-2
黄Yellow	TJA5.2-3
黄Yellow	TJA5.2-4
.....	.....
黄Yellow	TJA5.2-9
黄Yellow	TJA5.2-10

位数Poles No.

颜色Colour	订货号Order NO.
黄Yellow	TJA6.2-2
黄Yellow	TJA6.2-3
黄Yellow	TJA6.2-4
.....	.....
黄Yellow	TJA6.2-9
黄Yellow	TJA6.2-10

位数Poles No.

颜色Colour	订货号Order NO.
黄Yellow	TJA8.2-2
黄Yellow	TJA8.2-3
黄Yellow	TJA8.2-4
.....	.....
黄Yellow	TJA8.2-9
黄Yellow	TJA8.2-10

闪电标记Front Marker

订货号Order NO.
*

闪电标记Front Marker

订货号Order NO.
*

闪电标记Front Marker

订货号Order NO.
*

正面标记Front Marker

订货号Order NO.
305801

正面标记Front Marker

订货号Order NO.
306801

正面标记Front Marker

订货号Order NO.
308801

卷带标记(50米一卷) Winding marking (50 meters/roll)

订货号Order NO.
TMZ9.6-50

卷带标记(50米一卷) Winding marking (50 meters/roll)

订货号Order NO.
TMZ9.6-50

卷带标记(50米一卷) Winding marking (50 meters/roll)

订货号Order NO.
TMZ9.6-50

正面标记和侧面标记Front And Side Marker

订货号Order NO.
TMB5.2-120

正面标记和侧面标记Front And Side Marker

订货号Order NO.
TMB6.2-100

正面标记和侧面标记Front And Side Marker


订货号Order NO.
TMB8.2-50

## TAPO系列大电流弹簧端子

### TAPO high current spring terminal

速普TAPO系列大电流弹簧端子，工作电压高达1000V (IEC)，最大额定电流232A；采用全不锈钢和紫铜金属材料，能够满足大电流负载连接的应用行业如铁路、风电、机械设备等。

SUPU TAPO series high current spring terminals, operating voltage up to 1000V (IEC), maximum rated current 232A; stainless steel and red copper metal materials are used, which can meet the severe application industries of high current load connection, such as railway, wind power, mechanical equipment, etc.

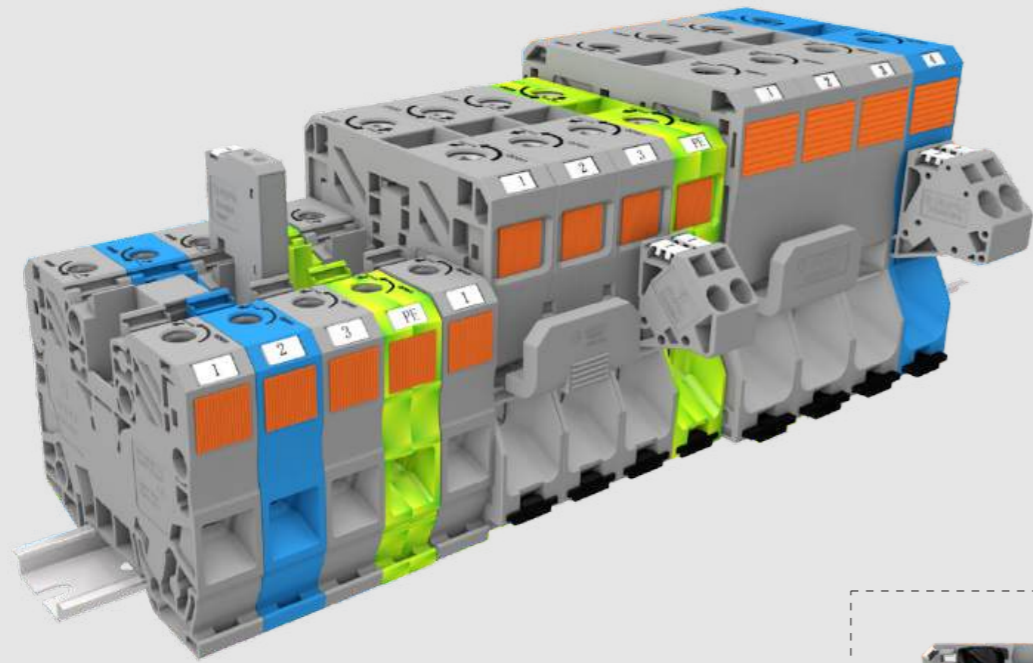

▲ 节省大量的接线成本和时间：得益于弹簧连接优异的抗振性和免维护性能，导线接入前无需做大量的预处理工作，单股硬导线、多股软导线都可以轻松接入。


▲ Save a lot of wiring costs and time: Benefit from the excellent vibration resistance and Maintenance-free function of the spring connection, there is no need to do a lot of pre-treatment before the wire is connected, and single strand hard wire and multi strand soft wire can be easily connected.

▲ 连接更快速更稳定可靠：使用8mm内六角扳手逆时针旋转打开进线孔完成导线安装；也可利用按压插锁，将进线孔维持弹簧打开状态，快速完成整条端子排导线安装。得益于弹簧连接强大的夹持力，导线锁紧程度不受操作人员的接线技术影响。

▲ Quick and safe connection: use an 8mm hexagonal wrench to rotate counterclockwise to open the incoming hole to complete the wire installation; also can press the plug-in lock to keep the inlet hole open state and quickly complete the installation of the entire terminal strip. Benefit from the strong clamping force, the wire locking tight is not affected by the operator's wiring technology.

▲ 模块化分线功能：使用等电位分线插头提前预制导线，轻松插入TAPO产品，实现大电流分线功能。

▲ Modular distribution function: use equipotential wiring plugs to prefabricate wires in advance, and easily insert TAPO products to realize high current distribution function.




35mm²,大电流接线端子  
High current terminal block

50mm²,大电流接线端子  
High current terminal block

技术参数 Technical Parameter					技术参数 Technical Parameter		
尺寸 Size	厚度 Thickness	宽度 Width	高度 Height	厚度 Thickness	宽度 Width	高度 Height	
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	16	86	70.8	20	94	93
<b>额定参数 Rated Parameters</b>		IEC	UL		IEC	UL	
额定电压 Rated Voltage	[V]	1000	600		1000	600	
额定电流 Rated Current	[A]	125	115		150	150	
<b>接线容量 Wire Range</b>		刚性 Solid	柔性 Fine Stranded	带冷压头 Ferrule	刚性 Solid	柔性 Fine Stranded	带冷压头 Ferrule
	[mm²]	6-35	6-35	6-35	10-70	10-50	10-50
	[AWG]	10-2	10-2	10-2	8-1/0	8-1/0	8-1/0
螺钉类型 Screw Type	[*]		*				
扭矩 Torque	[N.m]		*				
<b>其余参数 Other Parameters</b>							
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0	
剥线长度 Strip length	[mm]		25			30	
订货信息 Order Information					订货信息 Order Information		
<b>产品 Product</b>	颜色 Colour	订货号 Order NO.			订货号 Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰 Gray	TAPO35-2-GY			TAPO50-2-GY		
	橙 Orange	TAPO35-2-OG			TAPO50-2-OG		
	蓝 Blue	TAPO35-2-BU			TAPO50-2-BU		
<b>盖板 Cover Plate</b>	颜色 Colour	订货号 Order NO.			订货号 Order NO.		
分线插头 Branching plug	灰 Gray	TAAG6-1-GY			TAAG6-2-GY		
		*			*		
<b>跨接件 Jumper</b>		订货号 Order NO.			订货号 Order NO.		
位数 Poles No.		订货号 Order NO.			订货号 Order NO.		
2		TJEB16-2			TJEB20-2		
3		*			*		
4		*			*		
...		.....			.....		
9		*			*		
10		*			*		
<b>闪电标记 Front Marker</b>		订货号 Order NO.			订货号 Order NO.		
1PCS 1片一条		WS-TAPO35			WS-TAPO50		
<b>正面标记(小) Front Marker(Small)</b>		订货号 Order NO.			订货号 Order NO.		
可提供印字服务 Printing Service		254801			*		
<b>侧面标记 Side Marker</b>		订货号 Order NO.			订货号 Order NO.		
可提供印字服务 Printing Service		225801			225801		




95mm²,大电流接线端子  
High current terminal block



35mm²,大电流接地端子  
High current ground terminal block



50mm²,大电流接地端子  
High current ground terminal block



95mm²,大电流接地端子  
High current ground terminal block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
25	91	101.3
IEC	UL	
1000	600	
232	200	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
25-95	25-95	25-95
4-4/0	4-4/0	4-4/0
*		
V0		
35		

订货信息Order Information	
订货号Order NO.	TAPO95-2-GY
	TAPO95-2-OG
	TAPO95-2-BU

配套附件Accessory	
订货号Order NO.	TAAG10-2-GY
*	
订货号Order NO.	TJEB25-2
*	
.....	
*	
*	
订货号Order NO.	WS-TAPO95
订货号Order NO.	*
订货号Order NO.	225801

技术参数Technical Parameter				
尺寸Size	厚度Thickness	宽度Width	高度Height	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	16	86	70.8
额定参数Rated Parameters	IEC	UL		
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
	[mm²]	6-35	6-35	6-35
	[AWG]	10-2	10-2	10-2
螺钉类型Screw Type	[*]	*		
扭矩Torque	[N.m]	*		
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			
剥线长度Strip length	[mm]	25		

产品Product		颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		黄绿Yellow green	TAPO35-2-PE
		*	*
		*	*

配套附件Accessory	
订货号Order NO.	TAAG6-1-GY
*	
订货号Order NO.	TJEB25-2
*	
.....	
*	
*	
订货号Order NO.	WS-TAPO35
订货号Order NO.	254801
订货号Order NO.	225801

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	IEC
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	[mm²]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94
剥线长度Strip length	[mm]

产品Product		颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		黄绿Yellow green
		*
		*

配套附件Accessory	
订货号Order NO.	TAAG6-2-GY
*	
订货号Order NO.	TJEB20-2
*	
.....	
*	
*	
订货号Order NO.	WS-TAPO50
订货号Order NO.	*
订货号Order NO.	225801

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
20	94	93
IEC	UL	
*	*	*
*	*	*
刚性Solid	柔性Fine Stranded	带冷压头Furrule
10-70	10-50	10-50
8-1/0	8-1/0	8-1/0
*		
V0		
30		

订货信息Order Information	
订货号Order NO.	TAPO50-2-PE
*	
*	

配套附件Accessory	
订货号Order NO.	TAAG10-2-GY
*	
订货号Order NO.	TJEB25-2
*	
.....	
*	
*	
订货号Order NO.	WS-TAPO50
订货号Order NO.	*
订货号Order NO.	225801

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
25	91	101.3
IEC	UL	
*	*	*
*	*	*
刚性Solid	柔性Fine Stranded	带冷压头Furrule
25-95	25-95	25-95
4-4/0	4-4/0	4-4/0
*		
V0		
35		

订货信息Order Information	
订货号Order NO.	TAPO95-2-PE
*	
*	



配套附件Accessory	
订货号Order NO.	TAAG10-2-GY
*	
订货号Order NO.	TJEB25-2
*	
.....	
*	
*	
订货号Order NO.	WS-TAPO95
订货号Order NO.	*
订货号Order NO.	225801

## TC系列弹簧接线端子


### TC Rail-mounted Terminal Blocks With Spring-cage Clamp

TC系列弹簧接线端子采用笼式弹簧接线技术，具有节约空间的设计和最优接线方案两大特点。产品广泛应用于电梯、轨道交通、船舶、楼宇智能、重型设备及工业自动化等领域。产品设计制造符合IEC/EN60947、UL1059等相关国际标准。


TC series spring-cage terminal blocks adopt spring cage technology, which have 2 advantages, one is saving design space and the other one is best wire connection solution. The products can be widely used in elevator, rail way industry, ship building, building wire, heavy duty equipment, automation industry etc. The product design and manufacturing in line with relevant international standards such as IEC60947, UL1059.

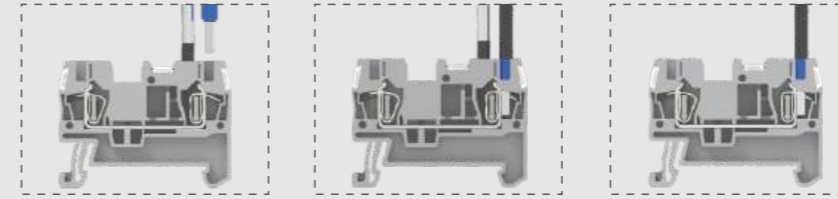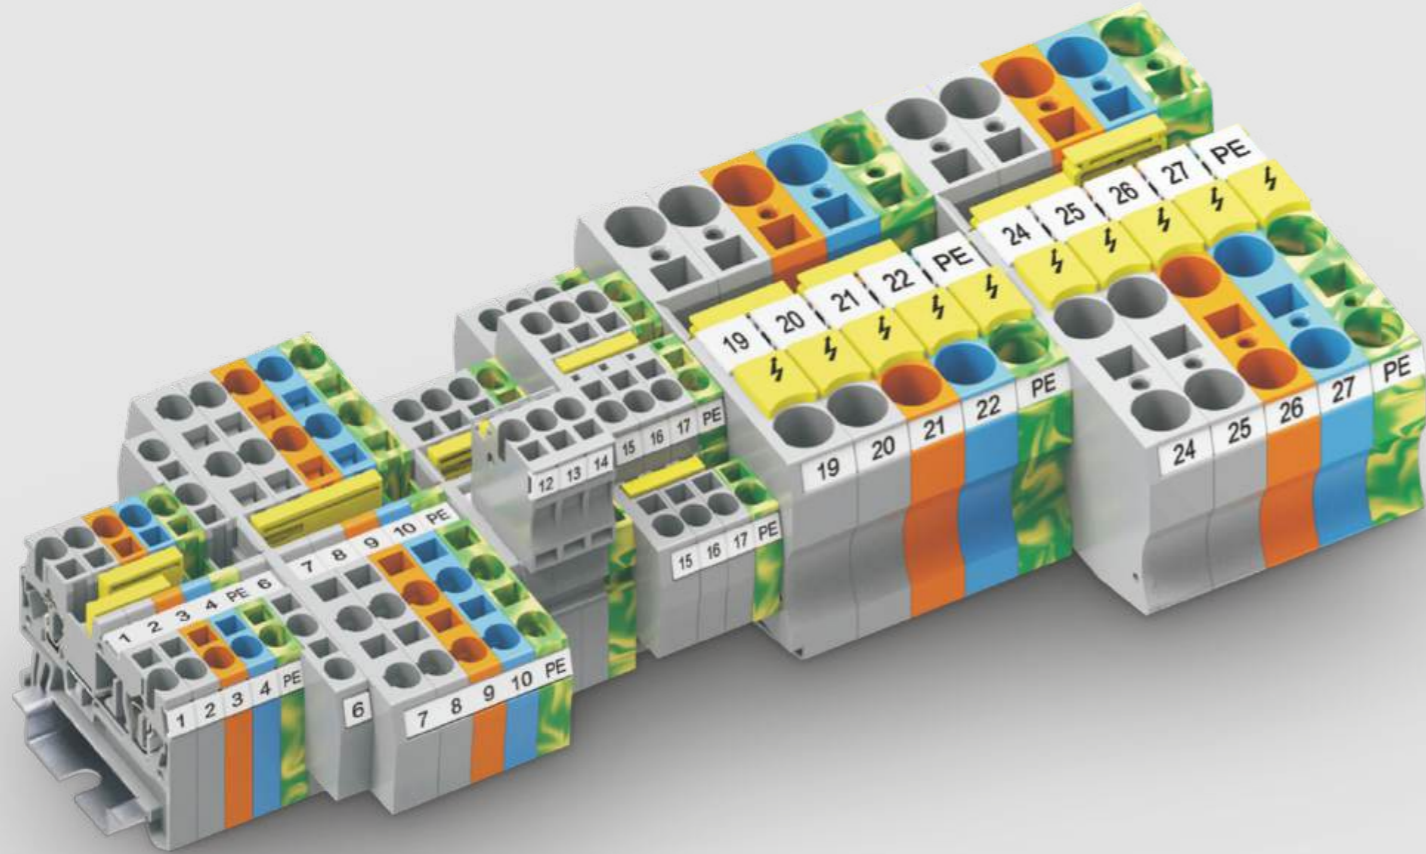


- ▲ 采用笼式弹簧接线技术，拥有更大的锁线力，能保证端子在震动环境中长期稳定的工作。
- ▲ 使用标准螺丝刀打开弹簧后将导线插入接线孔内，移除螺丝刀口即完成接线工作。
- ▲ 产品不单可接额定接线范围的软硬线，也可接额定接线范围带绝缘管冷压头，最大接线容量可达35mm<sup>2</sup>。
- ▲ Spring-cage connection technology has more locking force, which makes sure steady working in vibration surrounding.
- ▲ Easy operation: open the spring by screwdriver, insert wire. It's done when removing the screw driver.
- ▲ It's workable not only for solid or flexible wire by the rated cross section, but also for wire with furrule by the rated cross section. Max wire cross section is 35mm<sup>2</sup>.

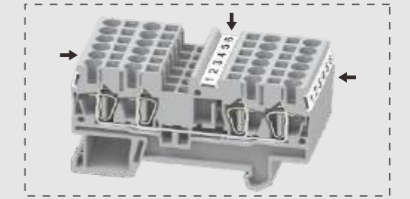


- 标识 Marking
- ▲ 采用三侧标识位设计，可在多个角度位置观察到端子标识，方便操作。
  - ▲ The marker are designed by 3 sides to make it easy to be observed, which makes operation easier.

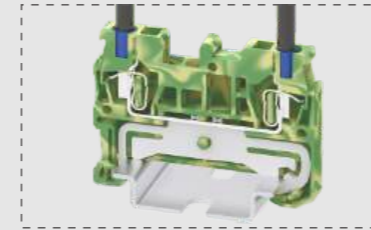

- 接地端子 Ground Terminal Block
- ▲ 使用黄绿色绝缘外壳，尺寸外形与接线端子相同。
  - ▲ 端子满足IEC60947-7-2标准中的要求。
  - ▲ Used the green-yellow insulation shell, the dimension is same as terminal blocks.
  - ▲ Approval for IEC 60947-7-2.

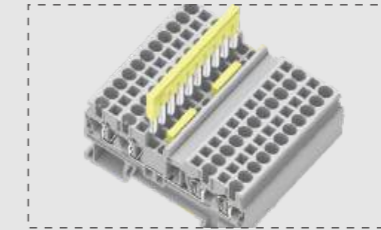


- 跨接系统 Jumper System
- ▲ 采用双排跨接槽设计，跨接件最多可达10极，可实现多种复杂的电路设计。
  - ▲ Adopting double row jumper slot design, the jumper can reach up to 10 pins at most, can achieve many kinds of complicated circuit design.

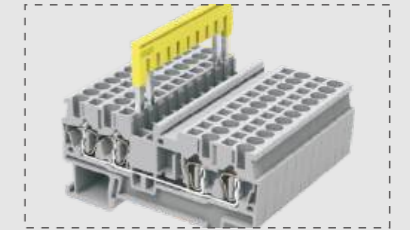


- 跨接 Staggered Jumper
- ▲ 折断跨接间的金属齿，可实现不相邻端子间的跨接
  - ▲ The adjacent poles can be connected by breaking down the comb's pin.




- 补偿端板 Compensatory Plate
- ▲ 不同位数端子并排拼接时，补偿端板可封闭裸露的载流体与紧固件。
  - ▲ The compensatory plates can be used to pretend from conductor parts when different poles terminal blocks assemble.

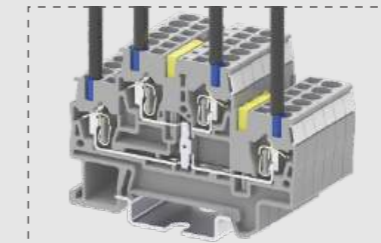

- 双层接线端子 Double-level Feed Through Terminal Block
- ▲ 双层端子上下两层即可实现独立工作也可实现两层间相互连接，其优点在于的空间内相比较传统两进两出端子长度大大节省。
  - ▲ 双层端子的标识系统、跨接系统等附件可与TC系列产品共用。
  - ▲ The up or down level can work separately or connected. It can connect more wires in same length than 2-2 terminal blocks.
  - ▲ It shares the accessory like markers jumpers with TC series.





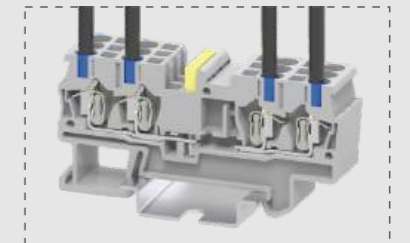


- 两进两出分段式接线端子 2-2 Feed Through Terminal Block With Interrupted Power Rail
- ▲ 两进两出分段式端子相较两进两出接线端子其载流体为中间断开结构，在同一端子的两侧实现两个独立的电位。
  - ▲ 一侧电位可使用跨接桥进行多位重桥接件与紧固件。
  - ▲ The conduction part is divided in middle compared to normal 2-2 terminal blocks. Which can get 2 individual circuits on a terminal block both sides.
  - ▲ And bridges can connected at random on one side.




插拔式接线端子 Pluggable Terminal Block

- ▲ 带插拔功能接线端子将TC回拉式弹簧接线端子与插头相结合，提供了灵活的连接方式。
- ▲ 插头与插座都带有防触电保护，端子与插头都可接入电源。
- ▲ 插头可实现单根导线连接、两根导线连接，还可实现跨接件连通多位插头。
- ▲ 插头可按客户需求提供多位数，最高可达15位，并且提供灰、蓝、橙、黄绿多种颜色。
- ▲ It joins from TC spring-cage connection terminal blocks and plug. Which get flexible connection solution.
- ▲ Both Plug-in and plug parts are protection against electric shock. Both can be connected to electricity.
- ▲ Plug can be connected by single or double wires. Or multi plugs connected by bridges.
- ▲ Plug can be provided from 2-15 poles. And gray, blue, orange, yellow-green colors are available.



	1.5mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block	2.5mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block	4mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block	6mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block	10mm <sup>2</sup> 一进一出接线端子 1-1 Feed Through Terminal Block							
<b>技术参数Technical Parameter</b>												
<b>尺寸Size</b>	厚度Thickness 4.2	宽度Width 48.2	高度Height 36.8	厚度Thickness 6.2	宽度Width 56.2	高度Height 36.8	厚度Thickness 8.2	宽度Width 69.5	高度Height 43.5	厚度Thickness 10.2	宽度Width 71.5	高度Height 49.6
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]											
<b>额定参数Rated Parameters</b>												
额定电压Rated Voltage	500	300		800	600		1000	600		1000	600	
额定电流Rated Current	17.5	15		24	20		41	50		57	65	
<b>接线容量Wire Range</b>												
	刚性Solid 0.2-1.5	柔性Fine Stranded 0.2-1.5	带冷压头Furrule 0.2-1.5	刚性Solid 0.2-4	柔性Fine Stranded 0.2-2.5	带冷压头Furrule 0.2-2.5	刚性Solid 0.2-6	柔性Fine Stranded 0.2-4	带冷压头Furrule 0.2-4	刚性Solid 0.2-10	柔性Fine Stranded 0.2-6	带冷压头Furrule 0.2-6
	[mm <sup>2</sup> ]											
	[AWG]											
<b>其余参数Other Parameters</b>												
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0	
剥线长度Strip length	[mm]	10			10			12			18	
<b>订货信息Order Information</b>												
<b>产品Product</b>	颜色Colour	订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	灰Gray 橙Orange 蓝Blue	TC1.5-2-GY TC1.5-2-OG TC1.5-2-BU		TC2.5-2-GY TC2.5-2-OG TC2.5-2-BU		TC4-2-GY TC4-2-OG TC4-2-BU		TC6-2-GY TC6-2-OG TC6-2-BU		TC10-2-GY TC10-2-OG TC10-2-BU		TC10-2-GY TC10-2-OG TC10-2-BU
<b>配套附件Accessory</b>												
<b>端板Cover Plate</b>		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	TC1.5-2-GY-EA TC1.5-2-OG-EA TC1.5-2-BU-EA		TC1.5-2-GY-EA TC1.5-2-OG-EA TC1.5-2-BU-EA		TC4-2-GY-EA TC4-2-OG-EA TC4-2-BU-EA		TC6-2-GY-EA TC6-2-OG-EA TC6-2-BU-EA		TC10-2-GY-EA TC10-2-OG-EA TC10-2-BU-EA		TC10-2-GY-EA TC10-2-OG-EA TC10-2-BU-EA
<b>补偿端板Compensatory Plate</b>		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.
厚度1.00mm Thickness1.00mm	灰Gray	TC1.5-4-GY-EB		TC1.5-4-GY-EB		TC4-4-GY-EB		*		*		*
<b>跨接件Jumper</b>		<b>Imax/17.5A</b>		<b>Imax/24A</b>		<b>Imax/32A</b>		<b>Imax/41A</b>		<b>Imax/57A</b>		<b>Imax/57A</b>
位数Poles No.	颜色Colour	订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.
2	黄Yellow	TJA4.2-2		TJA5.2-2		TJA6.2-2		TJA8.2-2		TJA10.2-2		TJA10.2-2
3	黄Yellow	TJA4.2-3		TJA5.2-3		TJA6.2-3		TJA8.2-3		*		*
4	黄Yellow	TJA4.2-4		TJA5.2-4		TJA6.2-4		TJA8.2-4		*		*
...	.....	.....		.....		.....		.....		.....		.....
9	黄Yellow	TJA4.2-9		TJA5.2-9		TJA6.2-9		TJA8.2-9		*		*
10	黄Yellow	TJA4.2-10		TJA5.2-10		TJA6.2-10		TJA8.2-10		*		*
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.
5位PCS		TMD4.2-5		TMD5.2-5		TMD6.2-5		TMD8.2-5		TMD10.2-5		TMD10.2-5
<b>正面标记Front Marker</b>		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.
10位PCS		*		305801		306801		308801		TMB10.2-10		TMB10.2-10
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.
可提供印字服务Printing Service		TMB4.2-100		TMB5.2-120		TMB6.2-100		TMB8.2-50		TMB8.2-50		TMB8.2-50

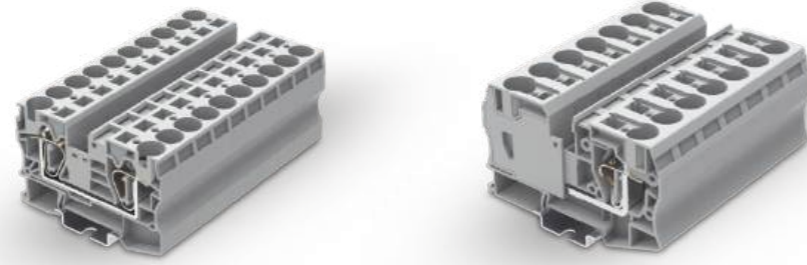

16mm² 一进一出接线端子  
1-1 Feed Through Terminal Block

35mm² 一进一出接线端子  
1-1 Feed Through Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12.2	80	51.5
IEC	UL	
1000	600	
76	85	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-25	0.2-16	0.25-16
24-4	24-4	24-4
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	18	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
16.1	100	59
IEC	UL	
1000	600	
125	115	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
2.5-35	2.5-35	2.5-35
14-2	14-2	14-2
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	25	

产品Product		颜色Colour
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	灰Gray	
	橙Orange	
	蓝Blue	

订货信息Order Information	
订货号Order NO.	
TC16-2-GY	
TC16-2-OG	
TC16-2-BU	

订货信息Order Information	
订货号Order NO.	
TC35-2-GY	
TC35-2-OG	
TC35-2-BU	

端板Cover Plate		
厚度2.2mm Thickness2.2mm	灰Gray	
	橙Orange	
	蓝Blue	

配套附件Accessory	
订货号Order NO.	
TC16-2-GY-EA	*
TC16-2-OG-EA	*
TC16-2-BU-EA	*

配套附件Accessory	
订货号Order NO.	
TC35-2-GY-EA	*
TC35-2-OG-EA	*
TC35-2-BU-EA	*

补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm	灰Gray	

配套附件Accessory	
订货号Order NO.	
TC16-2-GY-EB	*

配套附件Accessory	
订货号Order NO.	
TC35-2-GY-EB	*

跨接件Jumper		
位数Poles No.	颜色Colour	
2	黄Yellow	
3	黄Yellow	
4	黄Yellow	
...	.....	
9	黄Yellow	
10	黄Yellow	

跨接件Jumper	
位数Poles No.	订货号Order NO.
2	TJA12.2-2
3	*
4	*
...	.....
9	*
10	*

跨接件Jumper	
位数Poles No.	订货号Order NO.
2	TJA16-2
3	*
4	*
...	.....
9	*
10	*

安全警告标记 Protective Warning Marker		
5位PCS	正面标记Front Marker	
10位PCS	正面标记和侧面标记Front And Side Marker	




安全警告标记 Protective Warning Marker	
订货号Order NO.	
TMD10.2-5	
TMB10.2-10	
TMB8.2-50	

安全警告标记 Protective Warning Marker	
订货号Order NO.	
TMD10.2-5	
TMB10.2-10	
TMB8.2-50	

可提供印字服务Printing Service

可提供印字服务Printing Service

可提供印字服务Printing Service

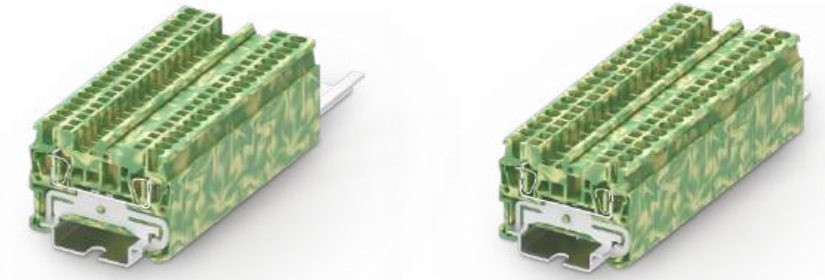

1.5mm² 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

2.5mm² 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
4.2	48.2	36.8
IEC	UL	
500	300	
*	*	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-1.5	0.2-1.5	0.2-1.5
24-16	24-16	24-16
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	10	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	48.2	36.8
IEC	UL	
800	600	
*	*	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	10	

产品Product		颜色Colour
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	黄绿Yellow green	
	*	
	*	

订货信息Order Information	
订货号Order NO.	
TC1.5-2-PE	
*	
*	

订货信息Order Information	
订货号Order NO.	
TC2.5-2-PE	
*	
*	

端板Cover Plate		
厚度2.2mm Thickness2.2mm	灰Gray	
	橙Orange	
	蓝Blue	

配套附件Accessory	
订货号Order NO.	
TC1.5-2-GY-EA	
TC1.5-2-OG-EA	
TC1.5-2-BU-EA	

配套附件Accessory	
订货号Order NO.	
TC2.5-2-GY-EA	
TC2.5-2-OG-EA	
TC2.5-2-BU-EA	

补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm	灰Gray	

配套附件Accessory	
订货号Order NO.	
TC1.5-4-GY-EB	

配套附件Accessory	
订货号Order NO.	
TC2.5-4-GY-EB	

跨接件Jumper		
位数Poles No.	颜色Colour	
2	黄Yellow	
3	黄Yellow	
4	黄Yellow	
...	.....	
9	黄Yellow	
10	黄Yellow	

跨接件Jumper	
位数Poles No.	订货号Order NO.
2	*
3	*
4	*
...	.....
9	*
10	*

跨接件Jumper	
位数Poles No.	订货号Order NO.
2	*
3	*
4	*
...	.....
9	*
10	*

安全警告标记 Protective Warning Marker		
5位PCS	正面标记Front Marker	
10位PCS	正面标记和侧面标记Front And Side Marker	







安全警告标记 Protective Warning Marker	
订货号Order NO.	
TMD4.2-5	
TMB4.2-100	

安全警告标记 Protective Warning Marker	
订货号Order NO.	
TMD5.2-5	
TMB5.2-120	

可提供印字服务Printing Service





Mark: (Total current which connects to all the wires, cannot be over rated current).

可提供印字服务Printing Service









	4mm <sup>2</sup> 一进一出接地端子 1-1 Feed Through Ground Terminal Block			6mm <sup>2</sup> 一进一出接地端子 1-1 Feed Through Ground Terminal Block			10mm <sup>2</sup> 一进一出接地端子 1-1 Feed Through Ground Terminal Block			16mm <sup>2</sup> 一进一出接地端子 1-1 Feed Through Ground Terminal Block			35mm <sup>2</sup> 一进一出接地端子 1-1 Feed Through Ground Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5 [mm]	6.2	56.2	36.8	8.2	69.5	43.5	10.2	71.5	49.6	12.2	80	51.5	16.1	100	59
<b>额定参数Rated Parameters</b>	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		1000	600		800	600		1000	600		1000	600	
额定电流Rated Current [A]	*	*		*	*		*	*		*	*		*	*	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.2-16	0.2-10	0.2-10	0.2-25	0.2-16	0.25-16	2.5-35	2.5-35	2.5-35
[AWG]	24-10	24-10	24-10	24-8	24-8	24-8	24-6	24-6	24-6	24-4	24-4	24-4	14-2	14-2	14-2
<b>其余参数Other Parameters</b>	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm]	10			12			18			18			25		
<b>产品Product</b>	颜色Colour			颜色Colour			颜色Colour			颜色Colour			颜色Colour		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	黄绿Yellow green			黄绿Yellow green			黄绿Yellow green			黄绿Yellow green			黄绿Yellow green		
<b>配套附件Accessory</b>	端板Cover Plate			端板Cover Plate			端板Cover Plate			端板Cover Plate			端板Cover Plate		
厚度2.2mm Thickness2.2mm	灰Gray			灰Gray			灰Gray			灰Gray			灰Gray		
	橙Orange			橙Orange			橙Orange			橙Orange			橙Orange		
	蓝Blue			蓝Blue			蓝Blue			蓝Blue			蓝Blue		
<b>配套附件Accessory</b>	补偿端板Compensatory Plate			补偿端板Compensatory Plate			补偿端板Compensatory Plate			补偿端板Compensatory Plate			补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm	灰Gray			灰Gray			灰Gray			灰Gray			灰Gray		
<b>配套附件Accessory</b>	跨接件Jumper			跨接件Jumper			跨接件Jumper			跨接件Jumper			跨接件Jumper		
位数Poles No.	颜色Colour			颜色Colour			颜色Colour			颜色Colour			颜色Colour		
2	黄Yellow			黄Yellow			黄Yellow			黄Yellow			黄Yellow		
3	黄Yellow			黄Yellow			黄Yellow			黄Yellow			黄Yellow		
4	黄Yellow			黄Yellow			黄Yellow			黄Yellow			黄Yellow		
...	.....			.....			.....			.....			.....		
9	黄Yellow			黄Yellow			黄Yellow			黄Yellow			黄Yellow		
10	黄Yellow			黄Yellow			黄Yellow			黄Yellow			黄Yellow		
<b>安全警告标记 Protective Warning Marker</b>	5位PCS			5位PCS			5位PCS			5位PCS			5位PCS		
	TMD6.2-5			TMD8.2-5			TMD10.2-5			TMD10.2-5			TMD10.2-5		
<b>正面标记Front Marker</b>	10位PCS			10位PCS			10位PCS			10位PCS			10位PCS		
	306801			308801			TMB10.2-10			TMB10.2-10			TMB10.2-10		
<b>正面标记和侧面标记Front And Side Marker</b>	可提供印字服务Printing Service			可提供印字服务Printing Service			可提供印字服务Printing Service			可提供印字服务Printing Service			可提供印字服务Printing Service		
	TMB6.2-100			TMB8.2-50			TMB8.2-50			TMB8.2-50			TMB8.2-50		






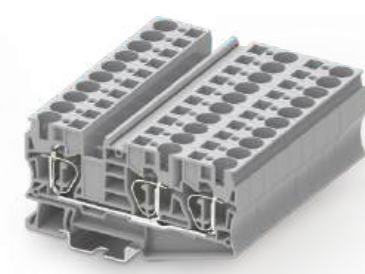

		1.5mm² 一进两出接线端子 1.5mm² 1-2 Feed Through Terminal Block			2.5mm² 一进两出接线端子 2.5mm² 1-2 Feed Through Terminal Block			4mm² 一进两出接线端子 1-2 Feed Through Terminal Block			6mm² 一进两出接线端子 1-2 Feed Through Terminal Block			10mm² 一进两出接线端子 1-2 Feed Through Terminal Block						
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter						
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height				
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		[mm]	4.2	60.2	36.8	5.2	60.2	36.8	6.2	71.8	36.8	8.2	90.5	43.5	10.2	97	50.4			
<b>额定参数Rated Parameters</b>			IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL	IEC	UL		
额定电压Rated Voltage		[V]	500	300	800	600	800	600	1000	600	1000	600	1000	600	1000	600	1000	600		
额定电流Rated Current		[A]	17.5	15	24	20	32	30	41	50	57	65	57	65	57	65	57	65		
<b>接线容量Wire Range</b>			刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
		[mm²]	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.2-16	0.2-10	0.2-10	0.2-16	0.2-10	0.2-10
		[AWG]	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10	24-8	24-8	24-8	24-6	24-6	24-6	24-6	24-6	24-6
<b>其余参数Other Parameters</b>			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94					
剥线长度Strip length		[mm]	10			10			10			12			18					
<b>产品Product</b>		颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15		灰Gray	TC1.5-3-GY			TC2.5-3-GY			TC4-3-GY			TC6-3-GY			TC10-3-GY					
		橙Orange	TC1.5-3-OG			TC2.5-3-OG			TC4-3-OG			TC6-3-OG			TC10-3-OG					
		蓝Blue	TC1.5-3-BU			TC2.5-3-BU			TC4-3-BU			TC6-3-BU			TC10-3-BU					
<b>端板Cover Plate</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
厚度2.2mm Thickness2.2mm		灰Gray	TC1.5-3-GY-EA			TC1.5-3-GY-EA			TC4-3-GY-EA			TC6-3-GY-EA			TC10-3-GY-EA					
		橙Orange	TC1.5-3-OG-EA			TC1.5-3-OG-EA			TC4-3-OG-EA			TC6-3-OG-EA			TC10-3-OG-EA					
		蓝Blue	TC1.5-3-BU-EA			TC1.5-3-BU-EA			TC4-3-BU-EA			TC6-3-BU-EA			TC10-3-BU-EA					
<b>补偿端板Compensatory Plate</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
厚度1.00mm Thickness1.00mm		灰Gray	TC1.5-4-GY-EB			TC1.5-4-GY-EB			TC4-4-GY-EB			*			*					
<b>跨接件Jumper</b>			<b>Imax/17.5A</b>			<b>Imax/24A</b>			<b>Imax/32A</b>			<b>Imax/41A</b>			<b>Imax/57A</b>					
位数Poles No.		颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
2		黄Yellow	TJA4.2-2			TJA5.2-2			TJA6.2-2			TJA8.2-2			TJA10.2-2					
3		黄Yellow	TJA4.2-3			TJA5.2-3			TJA6.2-3			TJA8.2-3			*					
4		黄Yellow	TJA4.2-4			TJA5.2-4			TJA6.2-4			TJA8.2-4			*					
...		.....	.....			.....			.....			.....			.....					
9		黄Yellow	TJA4.2-9			TJA5.2-9			TJA6.2-9			TJA8.2-9			*					
10		黄Yellow	TJA4.2-10			TJA5.2-10			TJA6.2-10			TJA8.2-10			*					
<b>安全警告标记 Protective Warning Marker</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
5位PCS			TMD4.2-5			TMD5.2-5			TMD6.2-5			TMD8.2-5			TMD10.2-5					
<b>正面标记Front Marker</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
10位PCS			*			305801			306801			308801			TMB10.2-10					
<b>正面标记和侧面标记Front And Side Marker</b>			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
可提供印字服务Printing Service			TMB4.2-100			TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB8.2-50					



	1.5mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block			2.5mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block			4mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block			6mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block			10mm <sup>2</sup> 一进两出接地端子 1-2 Feed Through Ground Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	4.2	60.2	36.8	5.2	60.2	36.8	6.2	71.8	36.8	8.2	90.5	43.5	10.2	97	50.4
额定电压Rated Voltage [V]	500	300		800	600		800	600		1000	600		1000	600	
额定电流Rated Current [A]	*	*		*	*		*	*		*	*		*	*	
接线容量Wire Range [mm <sup>2</sup> ]	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-1.5	0.2-1.5	0.2-1.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.2-16	0.2-10	0.2-10
	24-16	24-16	24-16	24-12	24-12	24-12	24-10	24-10	24-10	24-8	24-8	24-8	24-6	24-6	24-6
其余参数Other Parameters															
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length [mm]	10			10			10			12			18		
产品信息Product	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
黄绿Yellow green	TC1.5-3-PE			TC2.5-3-PE			TC4-3-PE			TC6-3-PE			TC10-3-PE		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail	*			*			*			*			*		
NS 35/7.5 NS35/15	*			*			*			*			*		
端板Cover Plate	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
厚度2.2mm Thickness2.2mm	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
灰Gray	TC1.5-3-GY-EA			TC1.5-3-GY-EA			TC4-3-GY-EA			TC6-3-GY-EA			TC10-3-GY-EA		
橙Orange	TC1.5-3-OG-EA			TC1.5-3-OG-EA			TC4-3-OG-EA			TC6-3-OG-EA			TC10-3-OG-EA		
蓝Blue	TC1.5-3-BU-EA			TC1.5-3-BU-EA			TC4-3-BU-EA			TC6-3-BU-EA			TC10-3-BU-EA		
补偿端板Compensatory Plate	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm	TC1.5-4-GY-EB			TC1.5-4-GY-EB			TC4-4-GY-EB			*			*		
跨接件Jumper	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
颜色Colour	*			*			*			TJA8.2-2			TJA10.2-2		
黄Yellow	*			*			*			TJA8.2-3			*		
黄Yellow	*			*			*			TJA8.2-4			*		
黄Yellow	*			*			*			.....			.....		
黄Yellow	*			*			*			TJA8.2-9			*		
黄Yellow	*			*			*			TJA8.2-10			*		
安全警告标记 Protective Warning Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS	TMD4.2-5			TMD5.2-5			TMD6.2-5			TMD8.2-5			TMD10.2-5		
正面标记Front Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS	*			305801			306801			308801			TMB10.2-10		
正面标记和侧面标记Front And Side Marker	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB4.2-100			TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB8.2-50		

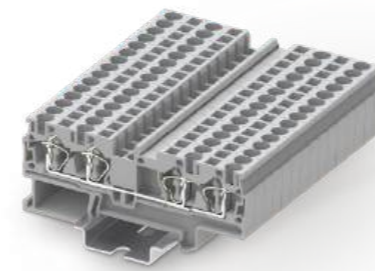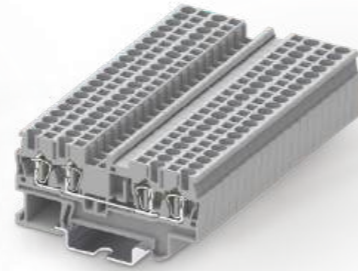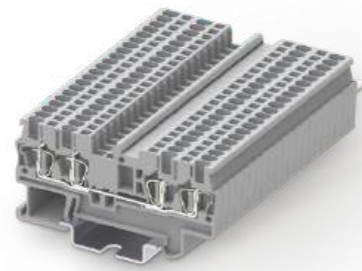

1.5mm<sup>2</sup> 两进两出接线端子  
2-2 Feed Through Terminal Block

2.5mm<sup>2</sup> 两进两出接线端子  
2-2 Feed Through Terminal Block

4mm<sup>2</sup> 两进两出接线端子  
2-2 Feed Through Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	灰Gray 橙Orange 蓝Blue
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	—
9	黄Yellow
10	黄Yellow
安全警告标记 Protective Warning Marker	
5位PCS	
正面标记Front Marker	
10位PCS	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
4.2	72.2	36.8
IEC	UL	
500	300	
17.5	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.5
24-16	24-16	24-16
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
10		



技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72.2	36.8
IEC	UL	
800	600	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	87.4	36.8
IEC	UL	
800	600	
32	30	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
10		

订货信息Order Information	
订货号Order NO.	TC1.5-4-GY TC1.5-4-OG TC1.5-4-BU
配套附件Accessory	
订货号Order NO.	TC1.5-4-GY-EA TC1.5-4-OG-EA TC1.5-4-BU-EA
订货号Order NO.	TC1.5-4-GY-EB
订货号Order NO.	Imax/17.5A
订货号Order NO.	TJA4.2-2 TJA4.2-3 TJA4.2-4 ..... TJA4.2-9 TJA4.2-10
订货号Order NO.	TMD4.2-5
订货号Order NO.	*
订货号Order NO.	TMB4.2-100

订货信息Order Information	
订货号Order NO.	TC2.5-4-GY TC2.5-4-OG TC2.5-4-BU
配套附件Accessory	
订货号Order NO.	TC1.5-4-GY-EA TC1.5-4-OG-EA TC1.5-4-BU-EA
订货号Order NO.	TC1.5-4-GY-EB
订货号Order NO.	Imax/24A
订货号Order NO.	TJA5.2-2 TJA5.2-3 TJA5.2-4 ..... TJA5.2-9 TJA5.2-10
订货号Order NO.	TMD5.2-5
订货号Order NO.	305801
订货号Order NO.	TMB5.2-120

订货信息Order Information	
订货号Order NO.	TC4-4-GY TC4-4-OG TC4-4-BU
配套附件Accessory	
订货号Order NO.	TC4-4-GY-EA TC4-4-OG-EA TC4-4-BU-EA
订货号Order NO.	TC4-4-GY-EB
订货号Order NO.	Imax/32A
订货号Order NO.	TJA6.2-2 TJA6.2-3 TJA6.2-4 ..... TJA6.2-9 TJA6.2-10
订货号Order NO.	TMD6.2-5
订货号Order NO.	306801
订货号Order NO.	TMB6.2-100



1.5mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block

2.5mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block



4mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail	*
NS 35/7.5 NS35/15	*
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	.....
9	黄Yellow
10	黄Yellow
安全警告标记 Protective Warning Marker	
5位PCS	
正面标记Front Marker	
10位PCS	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	



技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
4.2	72.2	36.8
IEC	UL	
500	300	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.5
24-16	24-16	24-16
订货信息Order Information		
订货号Order NO.		
TC1.5-4-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TC1.5-4-GY-EA		
TC1.5-4-OG-EA		
TC1.5-4-BU-EA		
订货号Order NO.		
TC1.5-4-GY-EB		
订货号Order NO.		
*		
*		
*.....		
*		
*		
订货号Order NO.		
TMD4.2-5		
订货号Order NO.		
*		
订货号Order NO.		
TMB4.2-100		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72.2	36.8
IEC	UL	
800	600	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
订货信息Order Information		
订货号Order NO.		
TC2.5-4-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TC1.5-4-GY-EA		
TC1.5-4-OG-EA		
TC1.5-4-BU-EA		
订货号Order NO.		
TC1.5-4-GY-EB		
订货号Order NO.		
*		
*		
*.....		
*		
*		
订货号Order NO.		
TMD5.2-5		
订货号Order NO.		
305801		
订货号Order NO.		
TMB5.2-120		



技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	87.4	36.8
IEC	UL	
800	600	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
订货信息Order Information		
订货号Order NO.		
TC4-4-PE		
*		
*		
配套附件Accessory		
订货号Order NO.		
TC4-4-GY-EA		
TC4-4-OG-EA		
TC4-4-BU-EA		
订货号Order NO.		
TC4-4-GY-EB		
订货号Order NO.		
*		
*		
*.....		
*		
*		
订货号Order NO.		
TMD6.2-5		
订货号Order NO.		
306801		
订货号Order NO.		
TMB6.2-100		

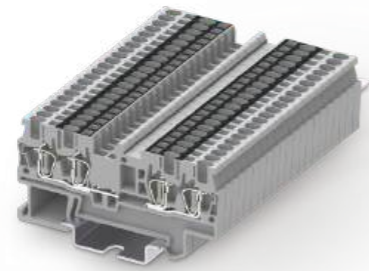

1.5mm<sup>2</sup> 两进两出分断式接线端子  
2×2 Feed Through Disconnect Terminal Block

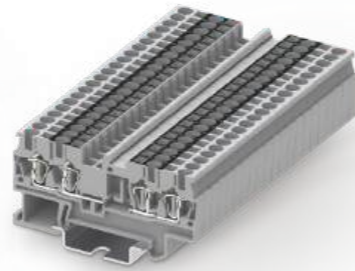

2.5mm<sup>2</sup> 两进两出分断式接线端子  
2×2 Feed Through Disconnect Terminal Block

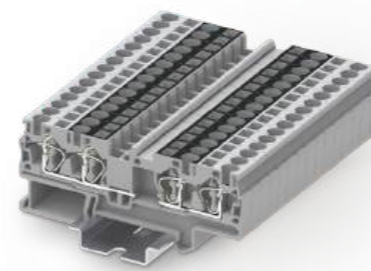



4mm<sup>2</sup> 两进两出分断式接线端子  
2×2 Feed Through Disconnect Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	灰Gray 橙Orange 蓝Blue
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	
端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue
补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray
跨接件Jumper	
位数Poles No.	
	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	.....
9	黄Yellow
10	黄Yellow
安全警告标记 Protective Warning Marker	
5位PCS	
正面标记Front Marker	
10位PCS	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
4.2	72.2	36.8
IEC	UL	
500	300	
17.5	15	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.5
24-16	24-16	24-16
订货信息Order Information		
订货号Order NO.		
TC1.5-2X2-GY		
TC1.5-2X2-OG		
TC1.5-2X2-BU		
配套附件Accessory		
订货号Order NO.		
TC1.5-4-GY-EA		
TC1.5-4-OG-EA		
TC1.5-4-BU-EA		
订货号Order NO.		
TC1.5-4-GY-EB		
Imax/17.5A		
订货号Order NO.		
TJA4.2-2		
TJA4.2-3		
TJA4.2-4		
.....		
TJA4.2-9		
TJA4.2-10		
订货号Order NO.		
TMD4.2-5		
正面标记Front Marker		
订货号Order NO.		
*		
正面标记和侧面标记Front And Side Marker		
订货号Order NO.		
TMB4.2-100		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	72.2	36.8
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
订货信息Order Information		
订货号Order NO.		
TC2.5-2X2-GY		
TC2.5-2X2-OG		
TC2.5-2X2-BU		
配套附件Accessory		
订货号Order NO.		
TC1.5-4-GY-EA		
TC1.5-4-OG-EA		
TC1.5-4-BU-EA		
订货号Order NO.		
TC1.5-4-GY-EB		
Imax/24A		
订货号Order NO.		
TJA5.2-2		
TJA5.2-3		
TJA5.2-4		
.....		
TJA5.2-9		
TJA5.2-10		
订货号Order NO.		
TMD5.2-5		
正面标记Front Marker		
订货号Order NO.		
305801		
正面标记和侧面标记Front And Side Marker		
订货号Order NO.		
TMB5.2-120		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	87.4	36.8
IEC	UL	
800	600	
32	30	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
订货信息Order Information		
订货号Order NO.		
TC4-2X2-GY		
TC4-2X2-OG		
TC4-2X2-BU		
配套附件Accessory		
订货号Order NO.		
TC4-4-GY-EA		
TC4-4-OG-EA		
TC4-4-BU-EA		
订货号Order NO.		
TC4-4-GY-EB		
Imax/32A		
订货号Order NO.		
TJA6.2-2		
TJA6.2-3		
TJA6.2-4		
.....		
TJA6.2-9		
TJA6.2-10		
订货号Order NO.		
TMD6.2-5		
正面标记Front Marker		
订货号Order NO.		
306801		
正面标记和侧面标记Front And Side Marker		
订货号Order NO.		
TMB6.2-100		

1.5mm<sup>2</sup> 双层接线端子  
Double Level Terminal Block1.5mm<sup>2</sup> 双层等电位接线端子  
Double Level With Equipotential Bond Terminal Block2.5mm<sup>2</sup> 双层接线端子  
Double Level Terminal Block2.5mm<sup>2</sup> 双层等电位接线端子  
Double Level With Equipotential Bond Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	68	43.4
IEC	UL	
500	300	
16	15	
刚性Solid		
0.2-1.5	0.2-1.5	0.2-1
柔性Fine Stranded		
26-14	26-14	18-14

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	68	43.4
IEC	UL	
500	300	
16	15	
刚性Solid		
0.2-1.5	0.2-1.5	0.2-1
柔性Fine Stranded		
26-14	26-14	18-14

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68	47.5
IEC	UL	
500	600	
22	20	
刚性Solid		
0.2-4	0.2-2.5	0.2-2.5
柔性Fine Stranded		
24-12	24-12	24-12

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68	47.5
IEC	UL	
500	600	
22	20	
刚性Solid		
0.2-4	0.2-2.5	0.2-2.5
柔性Fine Stranded		
24-12	24-12	24-12


产品Product		颜色Colour
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15		灰Gray
		橙Orange
		蓝Blue
端板Cover Plate		
厚度2.2mm Thickness2.2mm		灰Gray
		橙Orange
		蓝Blue
补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm		灰Gray
跨接件Jumper		
位数Poles No.		颜色Colour
2		黄Yellow
3		黄Yellow
4		黄Yellow
...		.....
9		黄Yellow
10		黄Yellow
安全警告标记 Protective Warning Marker		
5位PCS		*
正面标记Front Marker		
10位PCS		*
正面标记和侧面标记Front And Side Marker		
可提供印字服务Printing Service		

订货信息Order Information		
订货号Order NO.		
TCD1.5-2-GY		
TCD1.5-2-OG		
TCD1.5-2-BU		
配套附件Accessory		
订货号Order NO.		
TCD1.5-2-GY-EA		
TCD1.5-2-OG-EA		
TCD1.5-2-BU-EA		
补偿端板Compensatory Plate		
订货号Order NO.		
*		
跨接件Jumper		
Imax/24A		
位数Poles No.		
订货号Order NO.		
2		2150-302
3		2150-303
4		2150-304
...		.....
9		2150-309
10		2150-310
安全警告标记 Protective Warning Marker		
订货号Order NO.		
*		
正面标记Front Marker		
订货号Order NO.		
*		
正面标记和侧面标记Front And Side Marker		
订货号Order NO.		
TMB3.5-100		


订货信息Order Information		
订货号Order NO.		
TCD1.5-2-PV(黑色)		
*		
*		
配套附件Accessory		
订货号Order NO.		
TCD1.5-2-GY-EA		
TCD1.5-2-OG-EA		
TCD1.5-2-BU-EA		
补偿端板Compensatory Plate		
订货号Order NO.		
*		
跨接件Jumper		
Imax/24A		
位数Poles No.		
订货号Order NO.		
2		2150-302
3		2150-303
4		2150-304
...		.....
9		2150-309
10		2150-310
安全警告标记 Protective Warning Marker		
订货号Order NO.		
*		
正面标记Front Marker		
订货号Order NO.		
*		
正面标记和侧面标记Front And Side Marker		
订货号Order NO.		
TMB3.5-100		

订货信息Order Information		
订货号Order NO.		
TCD2.5-2-GY		
TCD2.5-2-OG		
TCD2.5-2-BU		
配套附件Accessory		
订货号Order NO.		
TCD2.5-2-GY-EA		
TCD2.5-2-OG-EA		
TCD2.5-2-BU-EA		
补偿端板Compensatory Plate		
订货号Order NO.		
*		
跨接件Jumper		
Imax/20A		
位数Poles No.		
订货号Order NO.		
2		TJA5.2-2
3		TJA5.2-3
4		TJA5.2-4
...		.....
9		TJA5.2-9
10		TJA5.2-10
安全警告标记 Protective Warning Marker		
订货号Order NO.		
TMD5.2-5		
正面标记Front Marker		
订货号Order NO.		
*		
正面标记和侧面标记Front And Side Marker		
订货号Order NO.		
TMB5.2-120		

订货信息Order Information		
订货号Order NO.		
TCD2.5-2-PV(黑色)		
*		
*		
配套附件Accessory		
订货号Order NO.		
TCD2.5-2-GY-EA		
TCD2.5-2-OG-EA		
TCD2.5-2-BU-EA		
补偿端板Compensatory Plate		
订货号Order NO.		
*		
跨接件Jumper		
Imax/20A		
位数Poles No.		
订货号Order NO.		
2		TJA5.2-2
3		TJA5.2-3
4		TJA5.2-4
...		.....
9		TJA5.2-9
10		TJA5.2-10
安全警告标记 Protective Warning Marker		
订货号Order NO.		
TMD5.2-5		
正面标记Front Marker		
订货号Order NO.		
*		
正面标记和侧面标记Front And Side Marker		
订货号Order NO.		
TMB5.2-120		




1.5mm<sup>2</sup> 双层等电位接地端子  
Double Level With Equipotential Bonder  
Ground Terminal Block




2.5mm<sup>2</sup> 双层等电位接地端子  
Double Level With Equipotential Bonder  
Ground Terminal Block

		技术参数Technical Parameter			技术参数Technical Parameter			
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		[mm]	3.5	68	43.4	5.2	68	47.5
额定参数Rated Parameters		IEC	UL		IEC	UL		
额定电压Rated Voltage		[V]	500	600	500	600		
额定电流Rated Current		[A]	*	*	*	*		
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
		[mm <sup>2</sup> ]	0.2-1.5	0.2-1.5	0.2-1	0.2-4	0.2-2.5	0.2-2.5
		[AWG]	26-14	26-14	18-14	24-12	24-12	24-12
其余参数Other Parameters								
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			
剥线长度Strip length		[mm]	10			10		
产品Product		颜色Colour	订货信息Order Information			订货信息Order Information		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15		黄绿Yellow green	订货号Order NO.			订货号Order NO.		
		*	TCD1.5-2-PE			TCD2.5-2-PE		
		*	*			*		
		*	*			*		
配套附件Accessory		配套附件Accessory			配套附件Accessory			
端板Cover Plate			订货号Order NO.			订货号Order NO.		
		灰Gray	TCD1.5-2-GY-EA			TCD2.5-2-GY-EA		
厚度2.2mm Thickness2.2mm		橙Orange	TCD1.5-2-OG-EA			TCD2.5-2-OG-EA		
		蓝Blue	TCD1.5-2-BU-EA			TCD2.5-2-BU-EA		
补偿端板Compensatory Plate			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm		灰Gray	*			*		
位数Poles No.		颜色Colour	订货号Order NO.			订货号Order NO.		
2		黄Yellow	*			*		
3		黄Yellow	*			*		
4		黄Yellow	*			*		
...		.....	.....			.....		
9		黄Yellow	*			*		
10		黄Yellow	*			*		
安全警告标记 Protective Warning Marker			订货号Order NO.			订货号Order NO.		
5位PCS			*			TMD5.2-5		
正面标记Front Marker			订货号Order NO.			订货号Order NO.		
10位PCS			*			*		
正面标记和侧面标记Front And Side Marker			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service			TMB3.5-100			TMB5.2-120		

备注: (所有连接导线的总电流不得超过产品的额定电流)

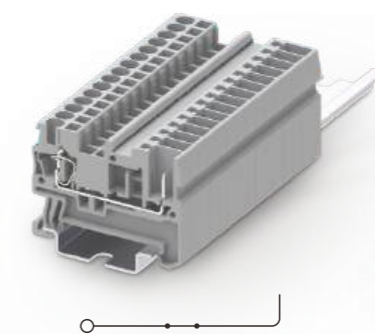


2.5mm<sup>2</sup> 一进一出插拔接线端子  
1-1 Feed Through Plug-in Terminal Block

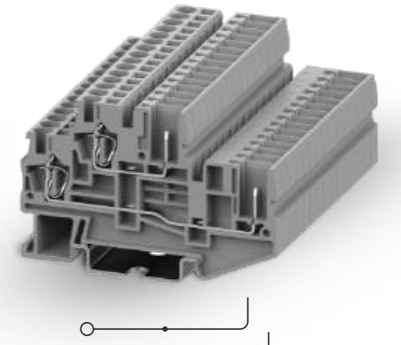

2.5mm<sup>2</sup> 双层插拔接线端子  
Double-level Pluggable Terminal Block

		技术参数Technical Parameter			技术参数Technical Parameter			
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		[mm]	5.2	68	47.5	5.2	71.5	46
额定参数Rated Parameters		IEC	UL		IEC	UL		
额定电压Rated Voltage		[V]	500	300	500	300		
额定电流Rated Current		[A]	24	20	22	20		
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
		[mm <sup>2</sup> ]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
		[AWG]	24-12	24-12	24-12	24-12	24-12	24-12
其余参数Other Parameters								
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			
剥线长度Strip length		[mm]	10			10		
产品Product		颜色Colour	订货信息Order Information			订货信息Order Information		
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15		灰Gray	订货号Order NO.			订货号Order NO.		
		橙Orange	TC2.5-2-1-GY			TCD2.5-2-1-GY		
		蓝Blue	TC2.5-2-1-OG			TCD2.5-2-1-OG		
			TC2.5-2-1-BU			TCD2.5-2-1-BU		
配套附件Accessory		配套附件Accessory			配套附件Accessory			
端板Cover Plate			订货号Order NO.			订货号Order NO.		
		灰Gray	TC1.5-2-GY-EA			TCD2.5-2-1-GY-EA		
厚度2.2mm Thickness2.2mm		橙Orange	TC1.5-2-OG-EA			TCD2.5-2-1-OG-EA		
		蓝Blue	TC1.5-2-BU-EA			TCD2.5-2-1-BU-EA		
补偿端板Compensatory Plate			订货号Order NO.			订货号Order NO.		
厚度1.00mm Thickness1.00mm		灰Gray	*			*		
位数Poles No.		颜色Colour	订货号Order NO.			订货号Order NO.		
2		黄Yellow	TJA5.2-2			TJA5.2-2		
3		黄Yellow	TJA5.2-3			TJA5.2-3		
4		黄Yellow	TJA5.2-4			TJA5.2-4		
...		.....	.....			.....		
9		黄Yellow	TJA5.2-9			TJA5.2-9		
10		黄Yellow	TJA5.2-10			TJA5.2-10		
安全警告标记 Protective Warning Marker			订货号Order NO.			订货号Order NO.		
5位PCS			TMD5.2-5			TMD5.2-5		
正面标记Front Marker			订货号Order NO.			订货号Order NO.		
10位PCS			305801			*		
正面标记和侧面标记Front And Side Marker			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service			TMB5.2-120			TMB5.2-120		

Mark: (Total current which connects to all the wires, cannot be over rated current).



2.5mm<sup>2</sup> 双层等电位插拔接线端子  
Double Level With Equipotential Bonder Plug-in Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	71.5	46
IEC	UL	
500	300	
22	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
V0		
10		

订货信息Order Information	
订货号Order NO.	TCD2.5-2-1-PV(黑色)
*	*

配套附件Accessory	
订货号Order NO.	TCD2.5-2-1-GY-EA
	TCD2.5-2-1-OG-EA
	TCD2.5-2-1-BU-EA

订货号Order NO.	*
--------------	---

Imax/24A	
订货号Order NO.	TJA5.2-2
	TJA5.2-3
	TJA5.2-4
	.....
	TJA5.2-9
	TJA5.2-10

订货号Order NO.	TMD5.2-5
--------------	----------

订货号Order NO.	*
--------------	---

订货号Order NO.	TMB5.2-120
--------------	------------

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
<b>额定参数Rated Parameters</b>	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
<b>接线容量Wire Range</b>	
	[mm <sup>2</sup> ]
	[AWG]
<b>其余参数Other Parameters</b>	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]

产品Product		颜色Colour
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15	*	黄绿Yellow green
	*	*

端板Cover Plate		
订货号Order NO.	TCD2.5-2-1-GY-EA	灰Gray
厚度2.2mm Thickness2.2mm	TCD2.5-2-1-OG-EA	橙Orange
	TCD2.5-2-1-BU-EA	蓝Blue


补偿端板Compensatory Plate		
订货号Order NO.	*	灰Gray

跨接件Jumper		
位数Poles No.	2	黄Yellow
	3	黄Yellow
	4	黄Yellow
	.....	.....
	9	黄Yellow
	10	黄Yellow

安全警告标记 Protective Warning Marker		
订货号Order NO.	5位PCS	TMD5.2-5

正面标记Front Marker		
订货号Order NO.	10位PCS	305801

正面标记和侧面标记Front And Side Marker		
订货号Order NO.	可提供印字服务Printing Service	TMB5.2-120

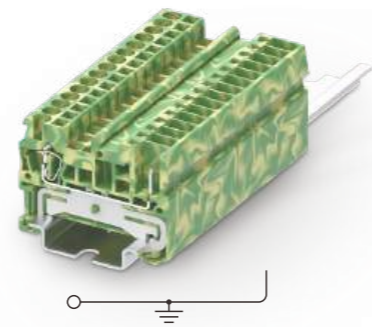

2.5mm<sup>2</sup> 一进一出插拔接地端子  
1-1 Feed Through Ground Plug-in Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68	47.5
IEC	UL	
500	300	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
V0		
10		

订货信息Order Information	
订货号Order NO.	TC2.5-2-1-PE
*	*

配套附件Accessory	
订货号Order NO.	TC1.5-2-GY-EA
	TC1.5-2-OG-EA
	TC1.5-2-BU-EA

订货号Order NO.	*
--------------	---


Imax/24A	
订货号Order NO.	*
	*
	*
	.....
	*
	*

订货号Order NO.	TMD5.2-5
--------------	----------

订货号Order NO.	305801
--------------	--------

订货号Order NO.	TMB5.2-120
--------------	------------

备注: (所有连接导线的总电流不得超过产品的额定电流)



2.5mm<sup>2</sup> 双层插拔接地端子  
Double-level Pluggable Ground Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	71.5	46
IEC	UL	
500	600	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
V0		
10		

订货信息Order Information	
订货号Order NO.	TCD2.5-2-1-PE
*	*

配套附件Accessory	
订货号Order NO.	TCD2.5-2-1-GY-EA
	TCD2.5-2-1-OG-EA
	TCD2.5-2-1-BU-EA

订货号Order NO.	*
--------------	---

Imax/24A	
订货号Order NO.	*
	*
	*
	.....
	*
	*

订货号Order NO.	TMD5.2-5
--------------	----------

订货号Order NO.	*
--------------	---



订货号Order NO.	TMB5.2-120
--------------	------------

Mark: (Total current which connects to all the wires, cannot be over rated current).



TC系列弹簧接线端子

TC Rail-mounted terminal blocks with spring-cage clamp

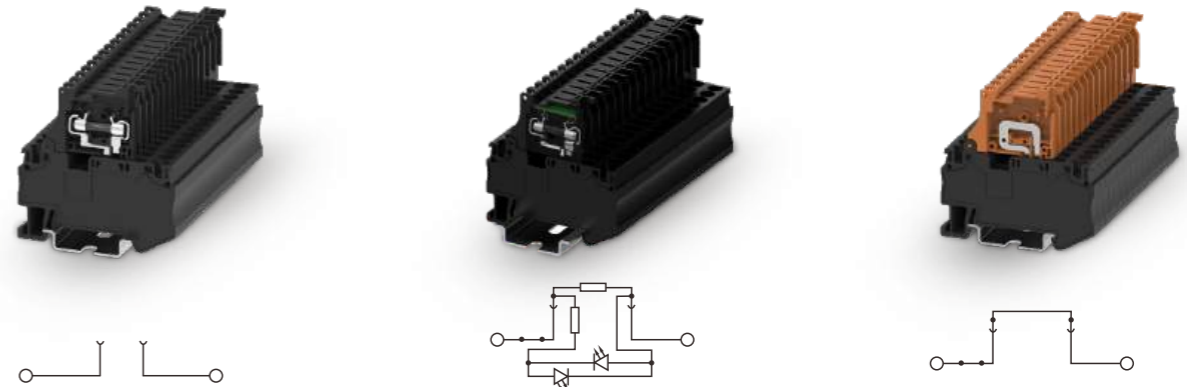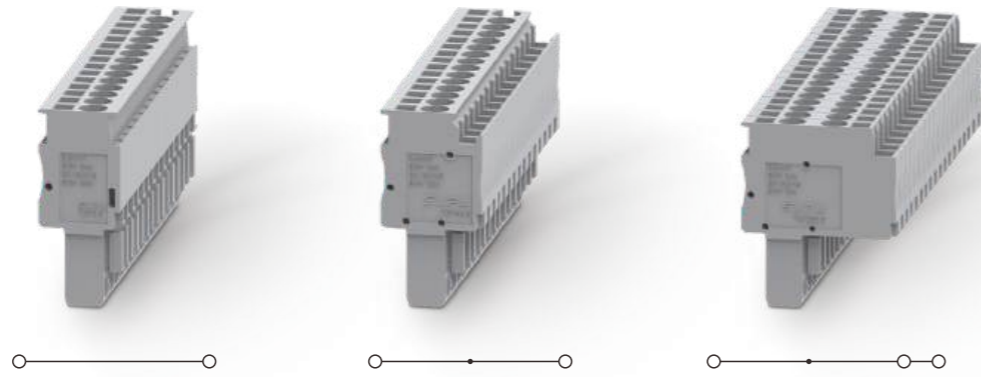

不提供保险管，图片仅供参考使用  
No fuse is provided. The picture is for reference only

不提供保险管，图片仅供参考使用  
No fuse is provided. The picture is for reference only

		2.5mm² 插头 Plug			2.5mm² 可跨接插头 Transable Plug			2.5mm² 2位可跨接插头 Double-row Transable Plug		
		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
[mm]		5.2	16.1	39.4	5.2	20.1	39.4	5.2	32.6	39.4
额定参数Rated Parameters		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	500	300		500	300		500	300	
额定电流Rated Current	[A]	24	20		24	20		24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm²]		0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
[AWG]		24-12	24-12	24-12	24-12	24-12	24-12	24-12	24-12	24-12
其余参数Other Parameters		V0			V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0		
剥线长度Strip length		10			10			10		
产品Product		订货信息Order Information			订货信息Order Information			订货信息Order Information		
位数Poles	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
1	灰Gray	TCP2.5-1-GY			TCPB2.5-1-GY			TCPDB2.5-1-GY		
2	灰Gray	TCP2.5-2-GY			TCPB2.5-2-GY			TCPDB2.5-2-GY		
...	...	.....			.....			.....		
14	灰Gray	TCP2.5-14-GY			TCPB2.5-14-GY			TCPDB2.5-14-GY		
15	灰Gray	TCP2.5-15-GY			TCPB2.5-15-GY			TCPDB2.5-15-GY		
1	蓝Blue	TCP2.5-1-BU			TCPB2.5-1-BU			TCPDB2.5-1-BU		
1	橙Orange	TCP2.5-1-OG			TCPB2.5-1-OG			TCPDB2.5-1-OG		
1	黄绿Yellow green	TCP2.5-1-PE			TCPB2.5-1-PE			TCPDB2.5-1-PE		
跨接件Jumper		I <sub>max</sub> /24A			I <sub>max</sub> /24A			I <sub>max</sub> /24A		
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	黄Yellow	*			TJA5.2-2			TJA5.2-2		
3	黄Yellow	*			TJA5.2-3			TJA5.2-3		
4	黄Yellow	*			TJA5.2-4			TJA5.2-4		
...	.....	.....			.....			.....		
9	黄Yellow	*			TJA5.2-9			TJA5.2-9		
10	黄Yellow	*			TJA5.2-10			TJA5.2-10		
安全警告标记 Protective Warning Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		*			*			*		
正面标记Front Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
10位PCS		*			*			*		
侧面标记Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service		TMB5.2-120			TMB5.2-120			TMB5.2-120		


4mm² 带保险管接线端子 Terminal Block With fuse			4mm² 带发光二极管保险管接线端子 Terminal Block With LED and fuse			4mm² 断开式接线端子 Disconnected Terminal Block		
技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
6.2	61.5	63.15	6.2	61.5	63.15	6.2	61.5	63.15
IEC	UL		IEC	UL		IEC	UL	
500	300		24-250	24-250		500	300	
6.3	10		6.3	10		6.3	10	
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4
24-10	24-10	24-10	24-10	24-10	24-10	24-10	24-10	24-10
V0			V0			V0		
10			10			10		
订货信息Order Information			订货信息Order Information			订货信息Order Information		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TC4-FUSE-BK(黑色)			TC4-FUSELED24-BK(黑色)			TC4-SPLIT		
TC4-FUSE-GY(灰色)			TC4-FUSELED36-BK			*		
*			TC4-FUSELED220-BK			*		
配套附件Accessory			配套附件Accessory			配套附件Accessory		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			*		
*			*			*		
*			*			*		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			*		
I <sub>max</sub> /24A			I <sub>max</sub> /24A			I <sub>max</sub> /24A		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TJA6.2-2			TJA6.2-2			TJA6.2-2		
TJA6.2-3			TJA6.2-3			TJA6.2-3		
TJA6.2-4			TJA6.2-4			TJA6.2-4		
.....			.....			.....		
TJA6.2-9			TJA6.2-9			TJA6.2-9		
TJA6.2-10			TJA6.2-10			TJA6.2-10		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			*		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
*			*			*		
订货号Order NO.			订货号Order NO.			订货号Order NO.		
TMB6.2-100			TMB6.2-100			TMB6.2-100		

## TU系列螺钉接线端子

### TU Rail-mounted terminal blocks with screw clamp

TU系列螺钉接线端子采用螺钉接线技术，适用于各种应用领域。该系列产品可实现多导线连接，使连接方式更加灵活。其防脱圈设计可有效防止螺钉松脱，保证端子的连接性能。产品设计制造符合IEC60947、UL1059等国际标准。

TU series screw terminals use screw wiring technology and are suitable for a variety of applications. This series of products can realize multiwire connection, making the connection mode more flexible. Its detachable coil design can effectively prevent screw loose and ensure the connection performance of terminals. The products are designed and manufactured in accordance with IEC60947, UL1059 and other international standards.

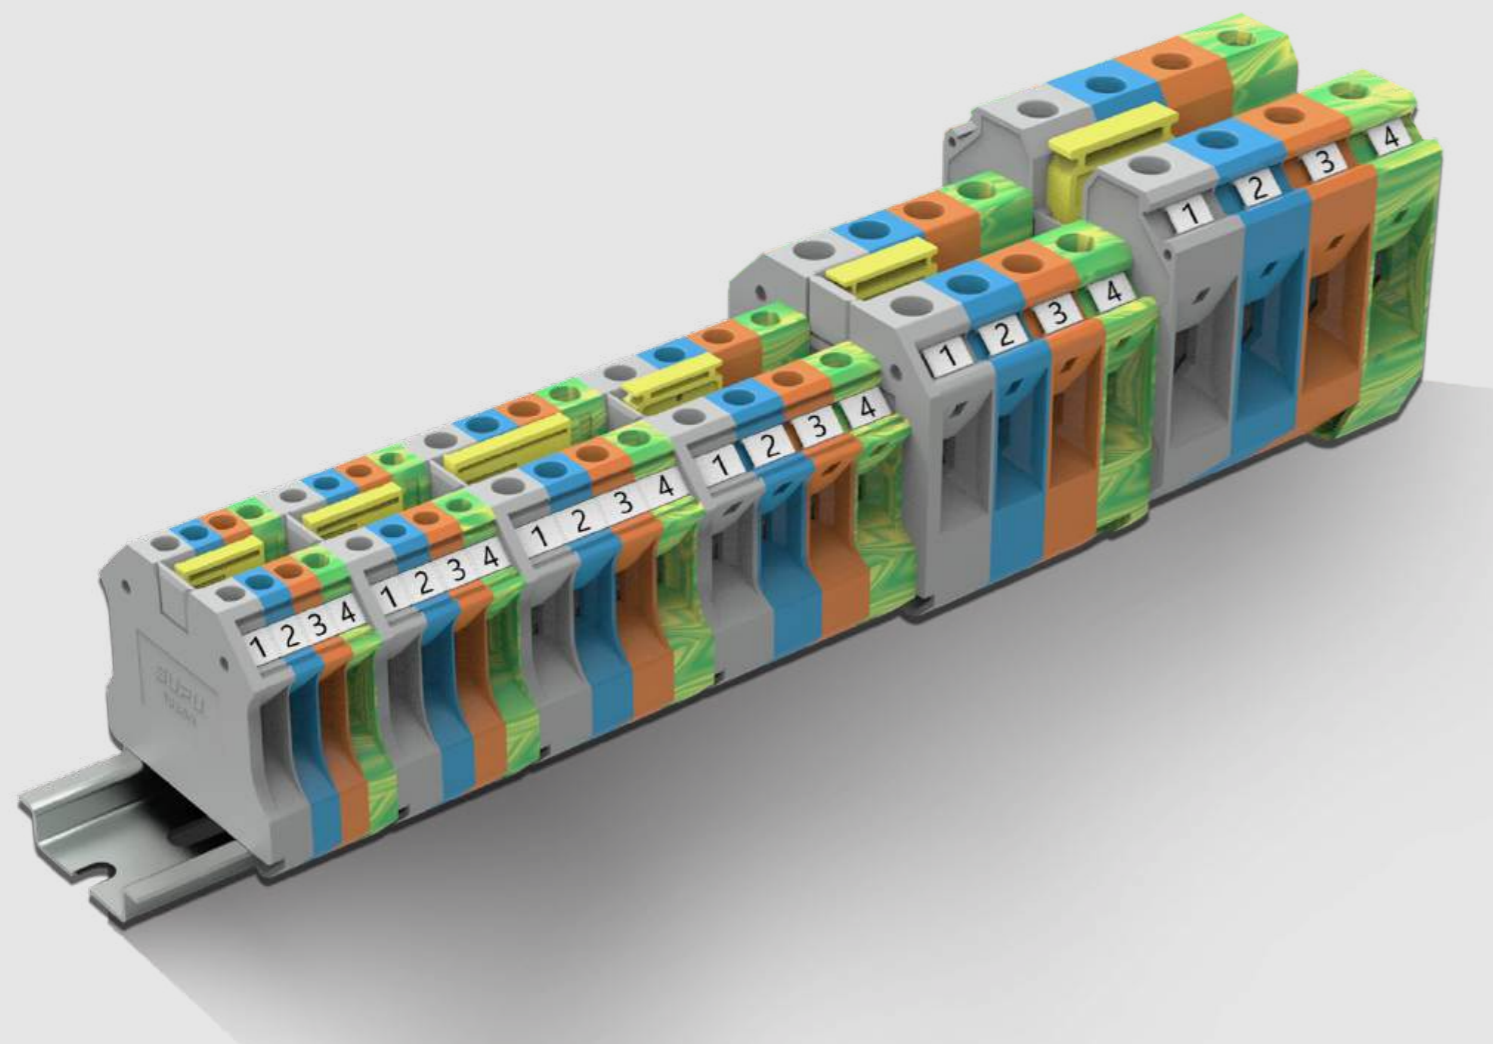

#### 卡接式接地端子 Clamping ground terminal

▲ 与接线端子外形相同，无需工具，可快速的直接卡入DIN导轨。符合IEC60947-7-2标准，满足所有机械及电气性能。


▲ The same shape as the normal terminal block, can be quickly and directly stuck into DIN guide without any tools. Meet the IEC60947-7-2 standard, meet all mechanical and electrical performance.



#### 标识 Marking

▲ 提供三种标记方案，可按需求自由选择。特别增加PVC标记牌，可标记复杂描述。



▲ Three marking schemes are provided, which can be freely selected according to requirements. Especially add PVC label, can mark complex description.

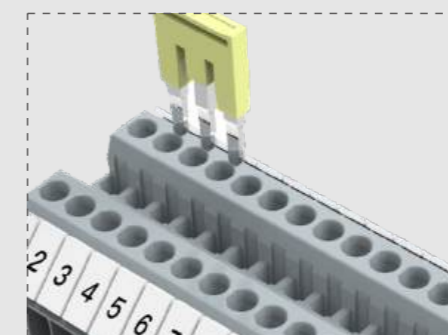

#### 跨接 Jumper

▲ 跨接结构标准化，与其他系列端子共用跨接桥。双排跨接设计，提供更多的电路连接方案。

▲ The bridge structure is standardized, sharing the bridge with other series of the terminals. Double row jumper design, provide more circuit connection scheme.



	2.5mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block			4mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block			6mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block			10mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block			16mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	5.2	47.3	46.2	6.2	47.3	46.2	8.2	47.3	46.2	10.2	47.3	46.2	12.2	52.8	54.35
<b>额定参数Rated Parameters</b>	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	1000	600		1000	600		1000	600		1000	600		1000	600	
额定电流Rated Current [A]	24	20		32	30		41	50		57	65		76	85	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.5-16	0.5-10	0.5-10	1.5-25	1.5-16	1.5-16
[AWG]	26-12	26-12	26-12	26-10	26-10	26-10	24-8	24-8	24-8	20-6	20-6	20-6	16-4	16-4	16-4
螺钉类型Screw Type [*]	M2.5			M3			M4			M4			M5		
扭矩Torque [N.m]	0.4			0.5			1.2			1.2			2.4		
<b>其余参数Other Parameters</b>	V0			V0			V0			V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	8-9			8-9			9-10			10-11			13-14		
剥线长度Strip length [mm]	订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information		
<b>产品Product</b>	颜色Colour			颜色Colour			颜色Colour			颜色Colour			颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray			灰Gray			灰Gray			灰Gray			灰Gray		
	橙Orange			橙Orange			橙Orange			橙Orange			橙Orange		
	蓝Blue			蓝Blue			蓝Blue			蓝Blue			蓝Blue		
<b>盖板Cover Plate</b>	颜色Colour			颜色Colour			颜色Colour			颜色Colour			颜色Colour		
盖板Cover Plate	灰Gray			灰Gray			灰Gray			灰Gray			灰Gray		
	橙Orange			橙Orange			橙Orange			橙Orange			橙Orange		
<b>测试插头Test Plug</b>	颜色Colour			颜色Colour			颜色Colour			颜色Colour			颜色Colour		
测试插头Test Plug	红Red			红Red			红Red			红Red			红Red		
<b>跨接件Jumper</b>	订货信息Order NO.			订货信息Order NO.			订货信息Order NO.			订货信息Order NO.			订货信息Order NO.		
极数Poles No.	2			2			2			2			2		
	3			3			3			3			3		
	4			4			4			4			4		
	...			.....			.....			.....			.....		
	9			9			9			9			9		
	10			10			10			10			10		
<b>正面标记(小)Front Marker(Small)</b>	订货信息Order NO.			订货信息Order NO.			订货信息Order NO.			订货信息Order NO.			订货信息Order NO.		
可提供印字服务Printing Service	TMB5.2-120			TMB6.2-100			TMB8.2-50			TMB8.2-50			TMB8.2-50		
<b>正面标记(大)Front Marker(Big)</b>	订货信息Order NO.			订货信息Order NO.			订货信息Order NO.			订货信息Order NO.			订货信息Order NO.		
可提供印字服务Printing Service	305801			306801			308801			TMB10.2-10			312801		
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50			TMZ9.6-50		



尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	灰Gray 橙Orange 蓝Blue
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	
盖板Cover Plate	
颜色Colour	灰Gray 橙Orange
盖板Cover Plate	
测试插头Test Plug	
颜色Colour	红Red
测试插头Test Plug	
跨接件Jumper	
极数Poles No.	订货号Order NO.
2	TJA16-2
3	*
4	*
...	*
9	*
10	*
正面标记(小)Front Marker(Small)	
可提供印字服务Printing Service	订货号Order NO. TMB8.2-50
正面标记(大)Front Marker(Big)	
可提供印字服务Printing Service	订货号Order NO. 316801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	
	TMZ9.6-50

35mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
16	59.2	65.05
IEC	UL	
1000	600	
125	150	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
1.5-50	1.5-35	1.5-35
16-1/0	16-1/0	16-1/0
螺钉类型Screw Type M6		
扭矩Torque 3.0		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm] 17-18		

订货信息Order Information		
产品Product	订货号Order NO.	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	TU35-2-GY	灰Gray
	TU35-2-OG	橙Orange
	TU35-2-BU	蓝Blue
配套附件Accessory		
盖板Cover Plate	订货号Order NO.	颜色Colour
盖板Cover Plate	*	灰Gray
	*	橙Orange
测试插头Test Plug	订货号Order NO.	颜色Colour
	*	红Red
跨接件Jumper		
极数Poles No.	订货号Order NO.	
2	TJA16-2	
3	*	
4	*	
...	*	
9	*	
10	*	
正面标记(小)Front Marker(Small)		
可提供印字服务Printing Service	订货号Order NO. TMB8.2-50	
正面标记(大)Front Marker(Big)		
可提供印字服务Printing Service	订货号Order NO. 316801	
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
	TMZ9.6-50	

50mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
20.4	70.5	76.1
IEC	UL	
1000	600	
150	150	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
16-70	25-70	25-50
6-1/0	6-1/0	6-1/0
螺钉类型Screw Type M6 (内六角 Inner hexagon)		
扭矩Torque 3.0		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm] 24		

订货信息Order Information		
产品Product	订货号Order NO.	颜色Colour
适配NS 50mm <sup>2</sup> 导轨	TU50-2-GY	灰Gray
	TU50-2-OG	橙Orange
	TU50-2-BU	蓝Blue
配套附件Accessory		
盖板Cover Plate	订货号Order NO.	颜色Colour
盖板Cover Plate	*	灰Gray
	*	橙Orange
测试插头Test Plug	订货号Order NO.	颜色Colour
	*	红Red
跨接件Jumper		
极数Poles No.	订货号Order NO.	
2	350302	
3	*	
4	*	
...	*	
9	*	
10	*	
正面标记(小)Front Marker(Small)		
可提供印字服务Printing Service	订货号Order NO. *	
正面标记(大)Front Marker(Big)		
可提供印字服务Printing Service	订货号Order NO. 316801	
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
	*	

70mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
20.4	70.5	79.5
IEC	UL	
1000	600	
192	150	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
16-95	25-70	16-70
6-3/0	6-3/0	6-3/0
螺钉类型Screw Type M8 (内六角 Inner hexagon)		
扭矩Torque 8-10		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm] 24		

订货信息Order Information		
产品Product	订货号Order NO.	颜色Colour
适配NS 70mm <sup>2</sup> 导轨	TU70-2-GY	灰Gray
	TU70-2-OG	橙Orange
	TU70-2-BU	蓝Blue
配套附件Accessory		
盖板Cover Plate	订货号Order NO.	颜色Colour
盖板Cover Plate	*	灰Gray
	*	橙Orange
测试插头Test Plug	订货号Order NO.	颜色Colour
	*	红Red
跨接件Jumper		
极数Poles No.	订货号Order NO.	
2	370302	
3	*	
4	*	
...	*	
9	*	
10	*	
正面标记(小)Front Marker(Small)		
可提供印字服务Printing Service	订货号Order NO. *	
正面标记(大)Front Marker(Big)		
可提供印字服务Printing Service	订货号Order NO. 316801	
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
	*	

95mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
25	83.2	90.1
IEC	UL	
1000	600	
232	230	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
25-95	35-95	35-95
2-4/0	2-4/0	2-4/0
螺钉类型Screw Type M8 (内六角 Inner hexagon)		
扭矩Torque 15-18		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm] 33		











订货信息Order Information		
产品Product	订货号Order NO.	颜色Colour
适配NS 95mm <sup>2</sup> 导轨	TU95-2-GY	灰Gray
	TU95-2-OG	橙Orange
	TU95-2-BU	蓝Blue
配套附件Accessory		
盖板Cover Plate	订货号Order NO.	颜色Colour
盖板Cover Plate	*	灰Gray
	*	橙Orange
测试插头Test Plug	订货号Order NO.	颜色Colour
	*	红Red
跨接件Jumper		
极数Poles No.	订货号Order NO.	
2	*	
3	*	
4	*	
...	*	
9	*	
10	*	
正面标记(小)Front Marker(Small)		
可提供印字服务Printing Service	订货号Order NO. *	
正面标记(大)Front Marker(Big)		
可提供印字服务Printing Service	订货号Order NO. 316801	
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
	*	

150mm <sup>2</sup> 一进一出TU接线端子 1-1 Feed Through TU Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
31	100	107.3
IEC	UL	
1000	600	
309	285	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
35-150	50-150	50-150
2-300kcmil		
螺钉类型Screw Type M10 (内六角 Inner hexagon)		
扭矩Torque 25-30		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length [mm] 40		

订货信息Order Information		
产品Product	订货号Order NO.	颜色Colour
适配NS 150mm <sup>2</sup> 导轨	TU150-2-GY	灰Gray
	TU150-2-OG	橙Orange
	TU150-2-BU	蓝Blue
配套附件Accessory		
盖板Cover Plate	订货号Order NO.	颜色Colour
盖板Cover Plate	*	灰Gray
	*	橙Orange
测试插头Test Plug	订货号Order NO.	颜色Colour
	*	红Red
跨接件Jumper		
极数Poles No.	订货号Order NO.	
2	*	
3	*	
4	*	
...	*	
9	*	
10	*	
正面标记(小)Front Marker(Small)		
可提供印字服务Printing Service	订货号Order NO. *	
正面标记(大)Front Marker(Big)		
可提供印字服务Printing Service	订货号Order NO. 316801	
卷带标记 (50米一卷) Winding marking (50 meters/roll)		
	*	






	240mm²一进一出TU接线端子 1-1 Feed Through TU Terminal Block			2.5mm²一进两出TU接线端子 1-2 Feed Through TU Terminal Block			4mm²一进两出TU接线端子 1-2 Feed Through TU Terminal Block			2.5mm²两进两出TU接线端子 2-2 Feed Through TU Terminal Block			4mm²两进两出TU接线端子 2-2 Feed Through TU Terminal Block				
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter				
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	36	100	123.6	5.2	56.8	46.2	6.2	56.8	46.2	5.2	64.2	46.2	6.2	64.2	46.2		
<b>额定参数Rated Parameters</b>	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL			
额定电压Rated Voltage [V]	1000	600		500	300		500	300		500	300		500	300			
额定电流Rated Current [A]	415	380		24	20		32	30		24	20		32	30			
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule		
[mm²]	70-240	70-240	70-185	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4		
[AWG]	2/0-500kcmil			26-12	26-12	26-12	26-10	26-10	26-10	26-12	26-12	26-12	26-10	26-10	26-10		
螺钉类型Screw Type [*]	M10 (内六角 Inner hexagon)			M2.5			M3			M2.5			M3				
扭矩Torque [N.m]	25-30			0.4			0.5			0.4			0.5				
<b>其余参数Other Parameters</b>																	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0				
剥线长度Strip length [mm]	40			9-11			8-9			9-11			8-9				
<b>产品Product</b>	颜色Colour			订货信息Order Information			订货信息Order Information			订货信息Order Information			订货信息Order Information				
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	订货号Order NO.		灰Gray	订货号Order NO.		灰Gray	订货号Order NO.		灰Gray	订货号Order NO.		灰Gray	订货号Order NO.			
	橙Orange	TU240-2-GY		橙Orange	TU2.5-3-GY		橙Orange	TU4-3-GY		橙Orange	TU2.5-4-GY		橙Orange	TU4-4-GY			
	蓝Blue	TU240-2-OG		蓝Blue	TU2.5-3-OG		蓝Blue	TU4-3-OG		蓝Blue	TU2.5-4-OG		蓝Blue	TU4-4-OG			
		TU240-2-BU			TU2.5-3-BU			TU4-3-BU			TU2.5-4-BU			TU4-4-BU			
<b>盖板Cover Plate</b>	颜色Colour			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory				
盖板Cover Plate	灰Gray	订货号Order NO.		灰Gray	订货号Order NO.		灰Gray	订货号Order NO.		灰Gray	订货号Order NO.		灰Gray	订货号Order NO.			
	橙Orange	*		橙Orange	TU2.5-3-GY-EA		橙Orange	TU2.5-3-GY-EA		橙Orange	TU2.5-4-GY-EA		橙Orange	TU2.5-4-GY-EA			
	蓝Blue	*		蓝Blue	TU2.5-3-OG-EA		蓝Blue	TU2.5-3-OG-EA		蓝Blue	TU2.5-4-OG-EA		蓝Blue	TU2.5-4-OG-EA			
测试插头Test Plug	红Red	订货号Order NO.		红Red	订货号Order NO.		红Red	订货号Order NO.		红Red	订货号Order NO.		红Red	订货号Order NO.			
		*			SP-5			SP-6			SP-5			SP-6			
<b>跨接件Jumper</b>																	
位数Poles No.	订货号Order NO.		位数Poles No.	订货号Order NO.		位数Poles No.	订货号Order NO.		位数Poles No.	订货号Order NO.		位数Poles No.	订货号Order NO.		位数Poles No.	订货号Order NO.	
2	*		2	TJA5.2-2		2	TJA6.2-2		2	TJA5.2-2		2	TJA6.2-2		2	TJA6.2-2	
3	*		3	TJA5.2-3		3	TJA6.2-3		3	TJA5.2-3		3	TJA6.2-3		3	TJA6.2-3	
4	*		4	TJA5.2-4		4	TJA6.2-4		4	TJA5.2-4		4	TJA6.2-4		4	TJA6.2-4	
...	*		...	.....		...	.....		...	*		...	.....		...	.....	
9	*		9	TJA5.2-9		9	TJA6.2-9		9	TJA5.2-9		9	TJA6.2-9		9	TJA6.2-9	
10	*		10	TJA5.2-10		10	TJA6.2-10		10	TJA5.2-10		10	TJA6.2-10		10	TJA6.2-10	
<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.		<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.		<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.		<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.		<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.		<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.	
可提供印字服务Printing Service	*		可提供印字服务Printing Service	TMB5.2-120		可提供印字服务Printing Service	TMB6.2-100		可提供印字服务Printing Service	TMB5.2-120		可提供印字服务Printing Service	TMB6.2-100		可提供印字服务Printing Service	TMB6.2-100	
<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.		<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.		<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.		<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.		<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.		<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.	
可提供印字服务Printing Service	316801		可提供印字服务Printing Service	305801		可提供印字服务Printing Service	306801		可提供印字服务Printing Service	305801		可提供印字服务Printing Service	306801		可提供印字服务Printing Service	306801	
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	*		<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50		<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50		<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50		<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50		<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50	








	2.5mm <sup>2</sup> 一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			4mm <sup>2</sup> 一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			6mm <sup>2</sup> 一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			10mm <sup>2</sup> 一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			16mm <sup>2</sup> 一进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block			
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5.2	47.3	46.2	6.2	47.3	46.2	8.2	47.3	46.2	10.2	47.3	46.2	12.2	52.8	54.35
<b>额定参数Rated Parameters</b>	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL		
额定电压Rated Voltage	[V]	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
额定电流Rated Current	[A]	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
[mm <sup>2</sup> ]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4	0.2-10	0.2-6	0.2-6	0.5-16	0.5-10	0.5-10	1.5-25	1.5-16	1.5-16	
[AWG]	26-12	26-12	26-12	26-10	26-10	26-10	24-8	24-8	24-8	20-6	20-6	20-6	16-4	16-4	16-4	
螺钉类型Screw Type	[*]	M2.5		M3		M4		M4		M4		M5		M5		
扭矩Torque	[N.m]	0.4		0.5		1.2		1.2		1.2		2.4		2.4		
<b>其余参数Other Parameters</b>	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0	V0		V0		V0		V0		V0		V0		
剥线长度Strip length	[mm]	8-9		8-9		9-10		10-11		10-11		13-14		13-14		
<b>产品Product</b>	颜色Colour	黄绿Yellow green		黄绿Yellow green		黄绿Yellow green		黄绿Yellow green		黄绿Yellow green		黄绿Yellow green		黄绿Yellow green		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		TU2.5-2-PE		TU4-2-PE		TU6-2-PE		TU10-2-PE		TU10-2-PE		TU16-2-PE		TU16-2-PE		
<b>盖板Cover Plate</b>	颜色Colour	灰Gray		灰Gray		灰Gray		灰Gray		灰Gray		灰Gray		灰Gray		
盖板Cover Plate		TU2.5-2-GY-EA		TU2.5-2-GY-EA		TU2.5-2-GY-EA		TU2.5-2-GY-EA		TU2.5-2-GY-EA		TU2.5-2-GY-EA		TU16-2-GY-EA		
测试插头Test Plug	颜色Colour	橙Orange		橙Orange		橙Orange		橙Orange		橙Orange		橙Orange		橙Orange		
测试插头Test Plug		TU2.5-2-OG-EA		TU2.5-2-OG-EA		TU2.5-2-OG-EA		TU2.5-2-OG-EA		TU2.5-2-OG-EA		TU2.5-2-OG-EA		TU16-2-OG-EA		
<b>跨接件Jumper</b>	极数Poles No.	订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		
	2	*		*		*		*		*		*		*		
	3	*		*		*		*		*		*		*		
	4	*		*		*		*		*		*		*		
	...	*		*		*		*		*		*		*		
	9	*		*		*		*		*		*		*		
	10	*		*		*		*		*		*		*		
<b>正面标记(小)Front Marker(Small)</b>	可提供印字服务Printing Service	订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		
		TMB5.2-120		TMB6.2-100		TMB8.2-50		TMB8.2-50		TMB8.2-50		TMB8.2-50		TMB8.2-50		
<b>正面标记(大)Front Marker(Big)</b>	可提供印字服务Printing Service	订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		订货号Order NO.		
		305801		306801		308801		308801		TMB10.2-10		TMB10.2-10		312801		
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>		TMZ9.6-50		TMZ9.6-50		TMZ9.6-50		TMZ9.6-50		TMZ9.6-50		TMZ9.6-50		TMZ9.6-50		

TU系列螺钉接线端子 TU Rail-mounted terminal blocks with screw clamp



	35mm <sup>2</sup> —进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block	50mm <sup>2</sup> —进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block	70mm <sup>2</sup> —进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block	95mm <sup>2</sup> —进一出TU接地端子 1-1 Feed Through TU Ground Terminal Block	2.5mm <sup>2</sup> —进两出TU接地端子 1-2 Feed Through TU Ground Terminal Block														
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter									
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height							
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	16	59.2	65.05	20.4	70.7	76.1	20.4	70.5	79.5	25	83.2	90.1	5.2	56.8	46.2			
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL					
额定电压Rated Voltage	[V]	*	*		*	*		*	*		*	*		*	*				
额定电流Rated Current	[A]	*	*		*	*		*	*		*	*		*	*				
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule				
	[mm <sup>2</sup> ]	1.5-50	1.5-35	1.5-35	16-70	25-70	25-50	16-95	25-70	16-70	25-95	35-95	35-95	0.2-4	0.2-2.5	0.2-2.5			
	[AWG]	16-1/0	16-1/0	16-1/0	6-1/0	6-1/0	6-1/0	6-3/0	6-3/0	6-3/0	2-4/0	2-4/0	2-4/0	26-12	26-12	26-12			
螺钉类型Screw Type	[*]	M6			M6 (内六角 Inner six angle)			M8 (内六角 Inner six angle)			M8 (内六角 Inner six angle)			M2.5					
扭矩Torque	[N.m]	3.0			3.0			8-10			15-18			0.4					
其余参数Other Parameters		V0			V0			V0			V0			V0					
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0					
剥线长度Strip length	[mm]	17-18			24			24			33			9-11					
产品信息Order Information	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
产品Product	颜色Colour	TU35-2-PE			TU50-2-PE			TU70-2-PE			TU95-2-PE			TU2.5-3-PE					
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green																		
盖板Cover Plate	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
盖板Cover Plate	灰Gray	*			*			*			*			TU2.5-3-GY-EA					
盖板Cover Plate	橙Orange	*			*			*			*			TU2.5-3-OG-EA					
测试插头Test Plug	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
测试插头Test Plug	红Red	*			*			*			*			*					
跨接件Jumper		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
极数Poles No.		2			3			4			...			9			10		
		*			*			*			*			*			*		
正面标记(小)Front Marker(Small)		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
可提供印字服务Printing Service		TMB8.2-50			*			*			*			TMB5.2-120					
正面标记(大)Front Marker(Big)		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
可提供印字服务Printing Service		316801			316801			316801			316801			305801					
卷带标记 (50米一卷) Winding marking (50 meters/roll)		TMZ9.6-50			*			*			*			TMZ9.6-50					



4mm<sup>2</sup>一进两出TU接地端子  
1-2 Feed Through TU Ground Terminal Block

2.5mm<sup>2</sup>两进两出TU接地端子  
2-2 Feed Through TU Ground Terminal Block

4mm<sup>2</sup>两进两出TU接地端子  
2-2 Feed Through TU Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
<b>额定参数Rated Parameters</b>	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
<b>接线容量Wire Range</b>	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
<b>其余参数Other Parameters</b>	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
<b>产品Product</b>	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green
<b>盖板Cover Plate</b>	颜色Colour
盖板Cover Plate	灰Gray
	橙Orange
测试插头Test Plug	颜色Colour
	红Red
<b>跨接件Jumper</b>	
极数Poles No.	订货号Order NO.
2	*
3	*
4	*
...	*
9	*
10	*
<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.
可提供印字服务Printing Service	TMB6.2-100
<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.
可提供印字服务Printing Service	306801
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50





技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	56.8	46.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
26-10	26-10	26-10
	M3	
	0.5	
	V0	
	8-9	
<b>订货信息Order Information</b>		
订货号Order NO.		
TU4-3-PE		
<b>配套附件Accessory</b>		
订货号Order NO.		
TU2.5-3-GY-EA		
TU2.5-3-OG-EA		
测试插头Test Plug		
订货号Order NO.		
*		
<b>跨接件Jumper</b>		
极数Poles No.		
订货号Order NO.		
2		
3		
4		
...		
9		
10		
<b>正面标记(小)Front Marker(Small)</b>		
订货号Order NO.		
TMB6.2-100		
<b>正面标记(大)Front Marker(Big)</b>		
订货号Order NO.		
306801		
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>		
TMZ9.6-50		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	64.2	46.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12
	M2.5	
	0.4	
	V0	
	9-11	
<b>订货信息Order Information</b>		
订货号Order NO.		
TU2.5-4-PE		
<b>配套附件Accessory</b>		
订货号Order NO.		
TU2.5-4-GY-EA		
TU2.5-4-OG-EA		
测试插头Test Plug		
订货号Order NO.		
*		
<b>跨接件Jumper</b>		
极数Poles No.		
订货号Order NO.		
2		
3		
4		
...		
9		
10		
<b>正面标记(小)Front Marker(Small)</b>		
订货号Order NO.		
TMB5.2-120		
<b>正面标记(大)Front Marker(Big)</b>		
订货号Order NO.		
305801		
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>		
TMZ9.6-50		

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
<b>额定参数Rated Parameters</b>	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
<b>接线容量Wire Range</b>	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
<b>其余参数Other Parameters</b>	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
<b>产品Product</b>	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green
<b>盖板Cover Plate</b>	颜色Colour
盖板Cover Plate	灰Gray
	橙Orange
测试插头Test Plug	颜色Colour
	红Red
<b>跨接件Jumper</b>	
极数Poles No.	订货号Order NO.
2	*
3	*
4	*
...	*
9	*
10	*
<b>正面标记(小)Front Marker(Small)</b>	订货号Order NO.
可提供印字服务Printing Service	TMB6.2-100
<b>正面标记(大)Front Marker(Big)</b>	订货号Order NO.
可提供印字服务Printing Service	306801
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>	TMZ9.6-50

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	64.2	46.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
26-10	26-10	26-10
	M3	
	0.5	
	V0	
	8-9	
<b>订货信息Order Information</b>		
订货号Order NO.		
TU4-4-PE		
<b>配套附件Accessory</b>		
订货号Order NO.		
TU2.5-4-GY-EA		
TU2.5-4-OG-EA		
测试插头Test Plug		
订货号Order NO.		
*		
<b>跨接件Jumper</b>		
极数Poles No.		
订货号Order NO.		
2		
3		
4		
...		
9		
10		
<b>正面标记(小)Front Marker(Small)</b>		
订货号Order NO.		
TMB6.2-100		
<b>正面标记(大)Front Marker(Big)</b>		
订货号Order NO.		
306801		
<b>卷带标记 (50米一卷) Winding marking (50 meters/roll)</b>		
TMZ9.6-50		








	2.5mm <sup>2</sup> 双层接线端子 Double level terminal block			2.5mm <sup>2</sup> 双层等电位接线端子 Double level terminal block with equipotential bond		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	5.2	69.9	64.5	5.2	69.9	64.5
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		800	600	
额定电流Rated Current [A]	24	20		24	20	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]	0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
[AWG]	26-12	26-12	26-12	26-12	26-12	26-12
螺钉类型Screw Type [*]	M2.5			M2.5		
扭矩Torque [N.m]	0.4			0.4		
其余参数Other Parameters	V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0		
剥线长度Strip length [mm]	9-11			9-11		
产品Product	订货信息Order Information			订货信息Order Information		
颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TUD2.5-2-GY		灰Gray	TUD2.5-2-PV (黑色)	
	橙Orange	TUD2.5-2-OG		橙Orange	TUD2.5-2-OG	
	蓝Blue	TUD2.5-2-BU		蓝Blue	TUD2.5-2-BU	
盖板Cover Plate	配套附件Accessory			配套附件Accessory		
颜色Colour	订货号Order NO.			订货号Order NO.		
灰Gray	TUD2.5-2-GY-EA			TUD2.5-2-GY-EA		
橙Orange	TUD2.5-2-OG-EA			TUD2.5-2-OG-EA		
跨接件Jumper						
极数Poles No.	订货号Order NO.			订货号Order NO.		
2	TJA5.2-2			TJA5.2-2		
3	TJA5.2-3			TJA5.2-3		
4	TJA5.2-4			TJA5.2-4		
5	TJA5.2-5			TJA5.2-5		
6	TJA5.2-6			TJA5.2-6		
7	TJA5.2-7			TJA5.2-7		
8	TJA5.2-8			TJA5.2-8		
9	TJA5.2-9			TJA5.2-9		
10	TJA5.2-10			TJA5.2-10		
正面标记(小)Front Marker(Small)	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB5.2-120			TMB5.2-120		
正面标记(大)Front Marker(Big)	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	305801			305801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50		


	4mm <sup>2</sup> 双层接线端子 Double level terminal block			4mm <sup>2</sup> 双层等电位接线端子 Double level terminal block with equipotential bond		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	6.2	69.9	64.5	6.2	69.9	64.5
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	800	600		800	600	
额定电流Rated Current [A]	32	30		32	30	
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]	0.2-6	0.2-4	0.2-4	0.2-6	0.2-4	0.2-4
[AWG]	26-10	26-10	26-10	26-10	26-10	26-10
螺钉类型Screw Type [*]	M3			M3		
扭矩Torque [N.m]	0.5			0.5		
其余参数Other Parameters	V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0		
剥线长度Strip length [mm]	9-11			9-11		
产品Product	订货信息Order Information			订货信息Order Information		
颜色Colour	订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	TUD4-2-GY		灰Gray	TUD4-2-PV (黑色)	
	橙Orange	TUD4-2-OG		橙Orange	TUD4-2-OG	
	蓝Blue	TUD4-2-BU		蓝Blue	TUD4-2-BU	
盖板Cover Plate	配套附件Accessory			配套附件Accessory		
颜色Colour	订货号Order NO.			订货号Order NO.		
灰Gray	TUD2.5-2-GY-EA			TUD2.5-2-GY-EA		
橙Orange	TUD2.5-2-OG-EA			TUD2.5-2-OG-EA		
跨接件Jumper						
极数Poles No.	订货号Order NO.			订货号Order NO.		
2	TJA6.2-2			TJA6.2-2		
3	TJA6.2-3			TJA6.2-3		
4	TJA6.2-4			TJA6.2-4		
5	TJA6.2-5			TJA6.2-5		
6	TJA6.2-6			TJA6.2-6		
7	TJA6.2-7			TJA6.2-7		
8	TJA6.2-8			TJA6.2-8		
9	TJA6.2-9			TJA6.2-9		
10	TJA6.2-10			TJA6.2-10		
正面标记(小)Front Marker(Small)	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	TMB6.2-100			TMB6.2-100		
正面标记(大)Front Marker(Big)	订货号Order NO.			订货号Order NO.		
可提供印字服务Printing Service	306801			306801		
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50			TMZ9.6-50		

TU系列螺钉接线端子



TU Rail-mounted terminal blocks with screw clamp



不提供保险管，图片只供参考使用  
No fuse is provided. The picture is for reference only



不提供保险管，图片只供参考使用  
No fuse is provided. The picture is for reference only




不提供保险管，图片只供参考使用  
No fuse is provided. The picture is for reference only


	2.5mm² 双层接地端子 Double level ground terminal block			4mm² 双层接地端子 Double level ground terminal block		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注：安装NS35/7.5导轨后的高度 [mm] Note: Height With DIN Rail NS 35/7.5	5.2	69.9	64.5	6.2	69.9	64.5
额定参数Rated Parameters	IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	*	*		*	*	
额定电流Rated Current [A]	*	*		*	*	
接线容量Wire Range	带冷压头Furrule	柔性Fine Stranded	刚性Solid	带冷压头Furrule	柔性Fine Stranded	刚性Solid
[mm²]	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.2-4
[AWG]	26-12	26-12	26-12	26-10	26-10	26-10
螺钉类型Screw Type [*]	M2.5			M3		
扭矩Torque [N.m]	0.4			0.5		
其余参数Other Parameters	V0			V0		
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	9-11			9-11		
剥线长度Strip length [mm]	9-11			9-11		
产品Product	颜色Colour		订货信息Order Information			
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green		订货号Order NO.		TUD2.5-2-PE	
			订货号Order NO.		TUD4-2-PE	
盖板Cover Plate	颜色Colour		配套附件Accessory			
盖板Cover Plate	灰Gray		订货号Order NO.		TUD2.5-2-GY-EA	
	橙Orange		订货号Order NO.		TUD2.5-2-OG-EA	
跨接件Jumper	订货信息Order Information					
极数Poles No.	订货号Order NO.					
2	*					
3	*					
4	*					
5	*					
6	*					
7	*					
8	*					
9	*					
10	*					
正面标记(小)Front Marker(Small)	订货号Order NO.		TMB5.2-120			
可提供印字服务Printing Service	TMB5.2-120		TMB6.2-100			
正面标记(大)Front Marker(Big)	订货号Order NO.		305801			
可提供印字服务Printing Service	305801		306801			
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50		TMZ9.6-50			

	4mm² 带保险管接线端子 Terminal block with fuse			4mm² 带发光二极管保险管接线端子 Terminal block with LED and fuse			10mm² 螺帽式保险管端子 10mm² Fuse terminal block for cartridge fuse insert			
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
注：安装NS35/7.5导轨后的高度 [mm] Note: Height With DIN Rail NS 35/7.5	8.2	53	43.2	8.2	53	43.2	12	57.9	46.2	
额定参数Rated Parameters	IEC	UL		IEC	UL		IEC	UL		
额定电压Rated Voltage [V]	800	600		800	600		800	600		
额定电流Rated Current [A]	12	12		12	12		6.3	6.3		
接线容量Wire Range	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	
[mm²]	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	1.5-10	1.5-10	1.5-10	
[AWG]	22-10	22-10	22-10	22-10	22-10	22-10	22-6	22-6	22-6	
螺钉类型Screw Type [*]	M3			M3			M4			
扭矩Torque [N.m]	0.5			0.5			1.2			
其余参数Other Parameters	V0			V0			V0			
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	8-9			8-9			10			
剥线长度Strip length [mm]	8-9			8-9			10			
产品Product	颜色Colour		订货信息Order Information			订货信息Order Information				
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray		订货号Order NO.		TU4-HESI-GY			订货号Order NO.		
			订货号Order NO.		TU4-HESI5-GY TU4-HESI48-GY TU4-HESI60-GY TU4-HESI220-GY			订货号Order NO.		
			订货号Order NO.		TU4-HESI-GY-EA			订货号Order NO.		
盖板Cover Plate	颜色Colour		配套附件Accessory			配套附件Accessory				
盖板Cover Plate	灰Gray		订货号Order NO.		TU4-HESI-GY-EA			订货号Order NO.		
			订货号Order NO.		TU4-HESI-GY-EA			订货号Order NO.		
跨接件Jumper	订货信息Order Information									
极数Poles No.	订货号Order NO.									
2	*									
3	*									
4	*									
5	*									
6	*									
7	*									
8	*									
9	*									
10	*									
正面标记(小)Front Marker(Small)	订货号Order NO.		TMB8.2-50			订货号Order NO.			TMB10.2-10	
可提供印字服务Printing Service	TMB8.2-50		308801			308801			310801	
正面标记(大)Front Marker(Big)	订货号Order NO.		308801			308801			310801	
可提供印字服务Printing Service	308801		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50	
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50		TMZ9.6-50			TMZ9.6-50			TMZ9.6-50	

TU系列螺钉接线端子 TU Rail-mounted terminal blocks with screw clamp




4mm<sup>2</sup> 悬臂式保险丝端子, 可接5 x 20 mm G型保险丝  
4mm<sup>2</sup> Lever-type fuse terminal block, for 5 x 20 mm G fuse




4mm<sup>2</sup> 悬臂式带发光二极管保险丝端子, 可接5 x 20 mm G型保险丝  
4mm<sup>2</sup> Lever-type fuse terminal block, for 5 x 20 mm G fuse, with LED

技术参数Technical Parameter		技术参数Technical Parameter	
尺寸Size	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height
注: 安装NS35/7.5导轨后的高度 [mm] Note: Height With DIN Rail NS 35/7.5	6.2 59.55 75.6	6.2 59.55 75.6	6.2 59.55 75.6
额定参数Rated Parameters	IEC UL	IEC UL	IEC UL
额定电压Rated Voltage [V]	500 600	24-220 24-220	24-220 24-220
额定电流Rated Current [A]	6.3 10	6.3 10	6.3 10
接线容量Wire Range	刚性Solid 柔性Fine Stranded 带冷压头Furrule	刚性Solid 柔性Fine Stranded 带冷压头Furrule	刚性Solid 柔性Fine Stranded 带冷压头Furrule
[mm <sup>2</sup> ]	0.2-6 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4
[AWG]	26-10 26-10 26-10	26-10 26-10 26-10	26-10 26-10 26-10
螺钉类型Screw Type [*]	M3	M3	M3
扭矩Torque [N.m]	0.6	0.6	0.6
其余参数Other Parameters			
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
剥线长度Strip length [mm]	9	9	9
订货信息Order Information		订货信息Order Information	
产品Product 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	TU4-FUSE-BK(黑色)	TU4-FUSELED24-BK(黑色)	TU4-FUSELED24-BK(黑色)
配套附件Accessory		配套附件Accessory	
盖板Cover Plate 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.
盖板Cover Plate			
跨接件Jumper			
极数Poles No.	订货号Order NO.	订货号Order NO.	订货号Order NO.
2	TJA6.2-2	TJA6.2-2	TJA6.2-2
3	TJA6.2-3	TJA6.2-3	TJA6.2-3
4	TJA6.2-4	TJA6.2-4	TJA6.2-4
5	TJA6.2-5	TJA6.2-5	TJA6.2-5
6	TJA6.2-6	TJA6.2-6	TJA6.2-6
7	TJA6.2-7	TJA6.2-7	TJA6.2-7
8	TJA6.2-8	TJA6.2-8	TJA6.2-8
9	TJA6.2-9	TJA6.2-9	TJA6.2-9
10	TJA6.2-10	TJA6.2-10	TJA6.2-10
正面标记(小)Front Marker(Small)	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	TMB6.2-100	TMB6.2-100	TMB6.2-100
正面标记(大)Front Marker(Big)	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	306801	306801	306801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50	TMZ9.6-50	TMZ9.6-50



4mm<sup>2</sup> 刀闸分断接线端子  
Knife-disconnect terminal block



4mm<sup>2</sup> 分断接线端子  
4mm<sup>2</sup> Disconnect terminal block



4mm<sup>2</sup> 悬臂式分断端子  
4mm<sup>2</sup> Lever-type disconnect terminal block



技术参数Technical Parameter		技术参数Technical Parameter		技术参数Technical Parameter	
尺寸Size	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height
注: 安装NS35/7.5导轨后的高度 [mm] Note: Height With DIN Rail NS 35/7.5	6.2 59.55 46.2	6.2 59.55 46.2	6.2 59.55 46.2	6.2 59.55 46.2	6.2 59.55 46.2
额定参数Rated Parameters	IEC UL	IEC UL	IEC UL	IEC UL	IEC UL
额定电压Rated Voltage [V]	500 600	500 600	500 600	500 600	500 600
额定电流Rated Current [A]	20 16	20 16	20 16	6.3 10	6.3 10
接线容量Wire Range	刚性Solid 柔性Fine Stranded 带冷压头Furrule	刚性Solid 柔性Fine Stranded 带冷压头Furrule	刚性Solid 柔性Fine Stranded 带冷压头Furrule	刚性Solid 柔性Fine Stranded 带冷压头Furrule	刚性Solid 柔性Fine Stranded 带冷压头Furrule
[mm <sup>2</sup> ]	0.2-6 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4
[AWG]	26-10 26-10 26-10	26-10 26-10 26-10	26-10 26-10 26-10	26-10 26-10 26-10	26-10 26-10 26-10
螺钉类型Screw Type [*]	M3	M3	M3	M3	M3
扭矩Torque [N.m]	0.6	0.6	0.6	0.6	0.6
其余参数Other Parameters					
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0	V0	V0
剥线长度Strip length [mm]	9	9	9	9	9
订货信息Order Information		订货信息Order Information		订货信息Order Information	
产品Product 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	TU4-MT-GY TU4-MT-OG TU4-MT-BU	TU4-TG-GY TU4-TG-OG TU4-TG-BU	TU4-TG-GY TU4-TG-OG TU4-TG-BU	TU4-SPLIT	TU4-SPLIT
配套附件Accessory		配套附件Accessory		配套附件Accessory	
盖板Cover Plate 颜色Colour	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.
盖板Cover Plate					
跨接件Jumper					
极数Poles No.	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.
2	TJA6.2-2	TJA6.2-2	TJA6.2-2	TJA6.2-2	TJA6.2-2
3	TJA6.2-3	TJA6.2-3	TJA6.2-3	TJA6.2-3	TJA6.2-3
4	TJA6.2-4	TJA6.2-4	TJA6.2-4	TJA6.2-4	TJA6.2-4
5	TJA6.2-5	TJA6.2-5	TJA6.2-5	TJA6.2-5	TJA6.2-5
6	TJA6.2-6	TJA6.2-6	TJA6.2-6	TJA6.2-6	TJA6.2-6
7	TJA6.2-7	TJA6.2-7	TJA6.2-7	TJA6.2-7	TJA6.2-7
8	TJA6.2-8	TJA6.2-8	TJA6.2-8	TJA6.2-8	TJA6.2-8
9	TJA6.2-9	TJA6.2-9	TJA6.2-9	TJA6.2-9	TJA6.2-9
10	TJA6.2-10	TJA6.2-10	TJA6.2-10	TJA6.2-10	TJA6.2-10
正面标记(小)Front Marker(Small)	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	TMB6.2-100	TMB6.2-100	TMB6.2-100	TMB6.2-100	TMB6.2-100
正面标记(大)Front Marker(Big)	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service	306801	306801	306801	306801	306801
卷带标记 (50米一卷) Winding marking (50 meters/roll)	TMZ9.6-50	TMZ9.6-50	TMZ9.6-50	TMZ9.6-50	TMZ9.6-50

## TA系列弹簧接线端子

### TA Rail-mounted Terminal Blocks With Spring-cage Clamp


TA系列弹簧接线端子采用笼式弹簧接线技术，可以将2-4根0.2-16mm<sup>2</sup>的导线建立起安全可靠的电力和信号连接，产品广泛应用于电梯、轨道交通、船舶、楼宇智能、重型设备及工业自动化等领域。产品设计制造符合IEC/EN60947、UL1059等相关国际标准。

TA series rail-mounted spring cage clamp terminal blocks use spring cage connection technology, make 2-4, 0.2-16mm<sup>2</sup> wire establish a secure and reliable electricity and signal connection. The products are widely used in elevators, rail transportations, ships, buildings, heavy equipments and industrial automations. Product design and manufacturing in line with relevant international standards such as IEC60947, UL1059.

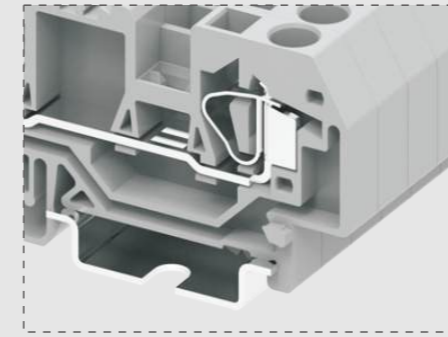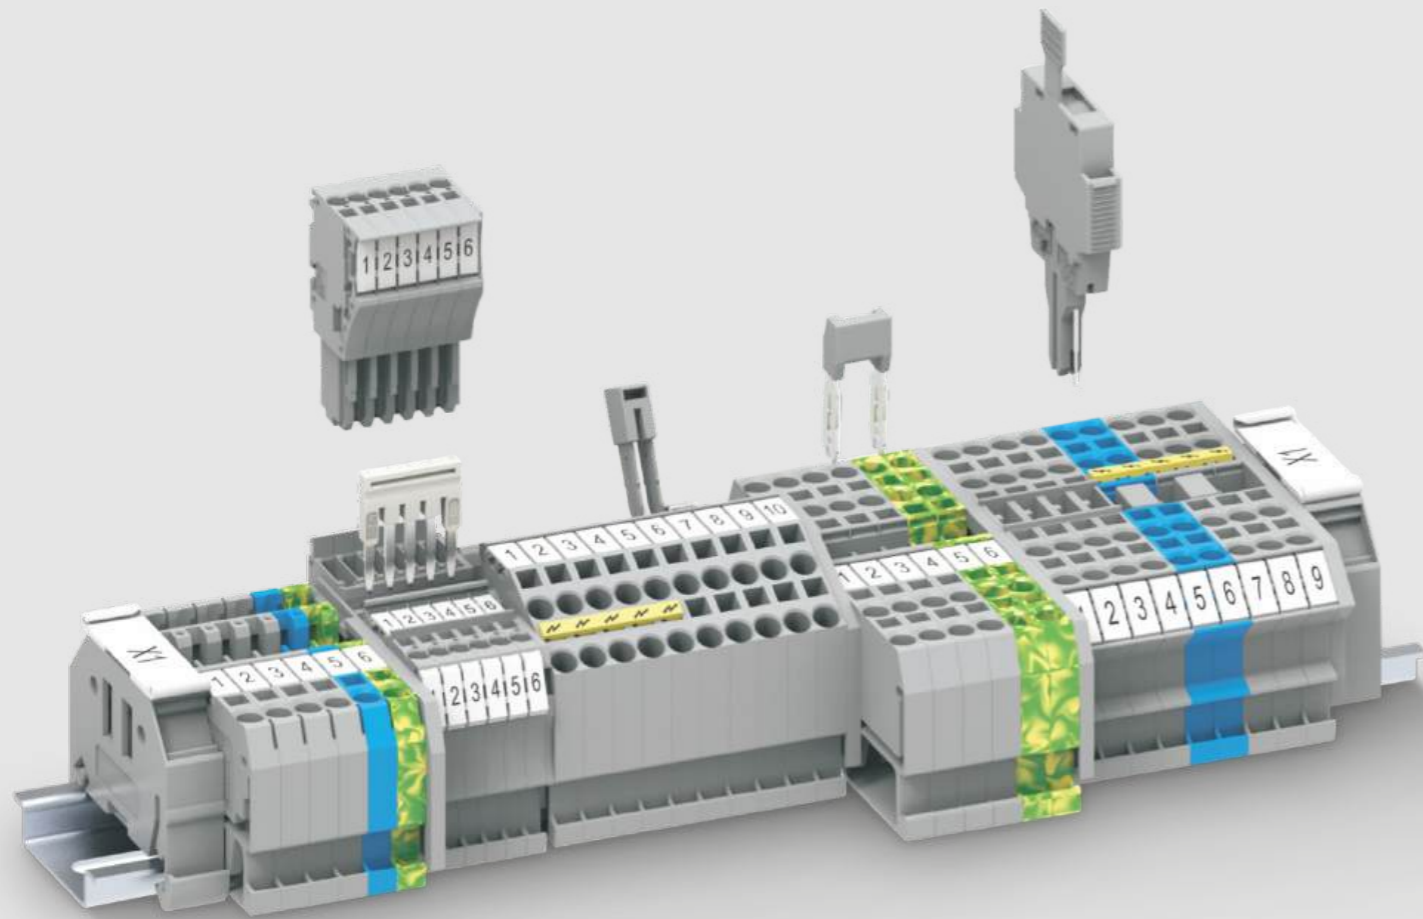


连接结构 Connection Structure

- ▲ 端子之间可相互连接固定
- ▲ Terminals can be connected to each other

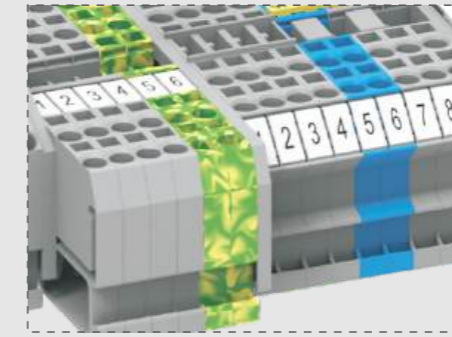


标识 Marking

- ▲ 具有正面标记与侧面标记两种标识，适用于各种不同的空间环境
- ▲ Front marker and side marker can be used in the different space environments

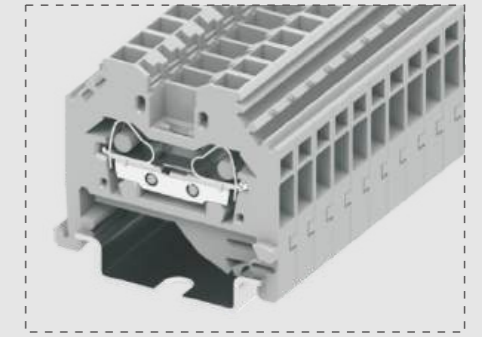


侧面接线 Side-entry wiring

- ▲ 从侧面接线，满足不同的空间环境下的接线方式
- ▲ Side-entry wiring can meet the connection in different space environments

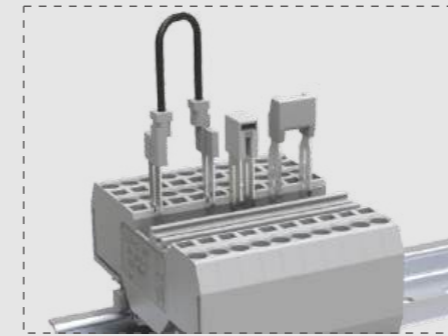


跨接件 Jumper

- ▲ 采用相邻跨接件、间隔跨接桥和导线跨接三种形式，可实现多种电路设计
- ▲ Adjacent jumpers, staggered jumpers and wire jumpers can realize multiple circuit designs

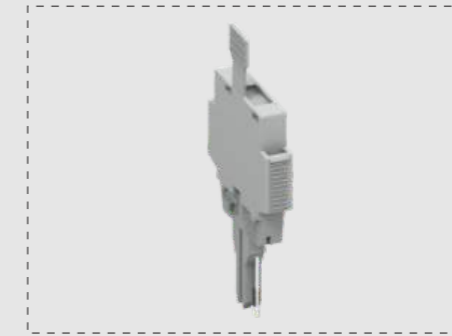


保险盒 Fuse Box

- ▲ 端子上可安装保险盒，保险盒内可安装保险管
- ▲ A fuse box can be installed on the terminal, and a fuse can be installed in the fuse box

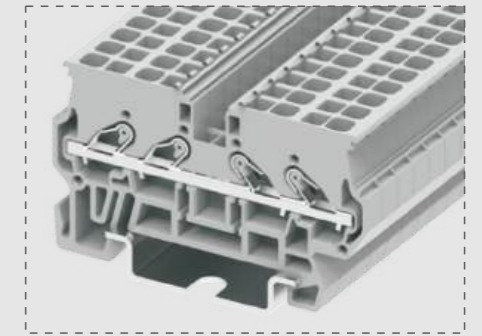


直插式端子 Straight Plug Type Terminal Block

- ▲ 无需借助特殊接线工具即可完成接线
- ▲ Wiring is done without special wiring tools

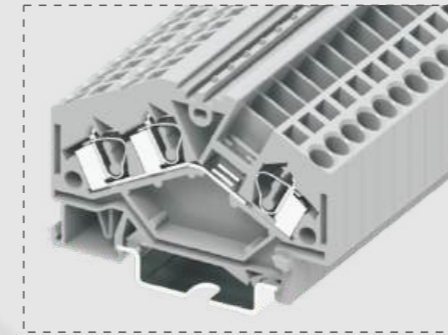


斜面端子 Angled Type Terminal Block

- ▲ 斜面型的设计减小了端子的外型尺寸，节省空间
- ▲ Angled type reduces the size of the terminal and saves space

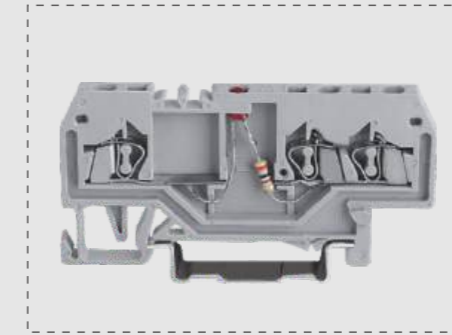






功能端子 Functional Terminal Block

- ▲ 带二极管和指示灯的接线端子，可方便实现各种不同的电路开关功能
- ▲ Wiring terminals with diodes and indicator lights for easy implementation of various circuit switching functions

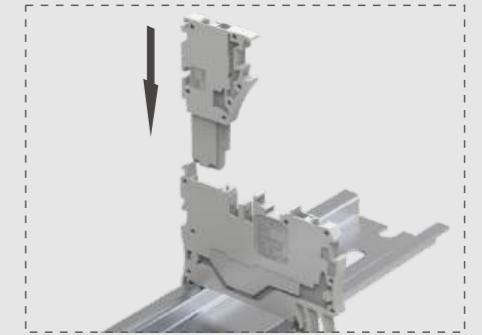

插拔式端子 Pluggable Terminal Block

- ▲ 将弹簧接线端子与插头相结合，提供灵活的接线方式
- ▲ Plug-in terminal blocks and female plugs provide the flexible wiring

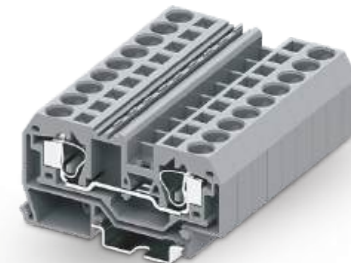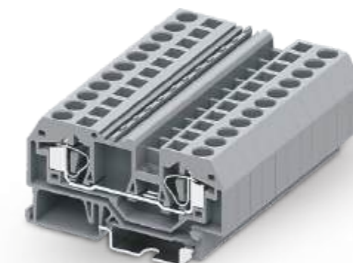

1.5mm<sup>2</sup> 一进一出接线端子  
1-1 Feed Through Terminal Block


2.5mm<sup>2</sup> 一进一出接线端子  
1-1 Feed Through Terminal Block

4mm<sup>2</sup> 一进一出接线端子  
1-1 Feed Through Terminal Block

6mm<sup>2</sup> 一进一出接线端子  
1-1 Feed Through Terminal Block

10mm<sup>2</sup> 一进一出接线端子  
1-1 Feed Through Terminal Block

尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	4	51.6	34.5	5	52.8	35.3	6	59	36	8	73.6	40	10	76.7	42.5
<b>额定参数Rated Parameters</b>		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current	[A]	18	10		24	20		32	20		41	30		57	50	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6
	[AWG]	28-16	28-16	28-16	28-14	28-14	28-14	28-12	28-12	28-12	28-10	28-10	28-10	28-8	28-8	28-8
<b>其余参数Other Parameters</b>		V0			V0			V0			V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		8-9			8-9			9-10			12-13			12-13		
剥线长度Strip length	[mm]	8-9			8-9			9-10			12-13			12-13		
<b>产品Product</b>	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	215921			225921			204921			206921			210921		
	橙Orange	215922			225922			204922			206922			210922		
	蓝Blue	215924			225924			204924			206923			210923		
<b>端板Cover Plate</b>		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
端板Cover Plate	灰Gray	215121			225121			204121			206121			210121		
	橙Orange	215122			225122			204122			206122			210122		
	*	*			*			*			*			*		
<b>跨接件Jumper</b>	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
相邻跨接桥Adjacent Jumper	灰Gray	215301			225301			204301			206301			210301		
		*			225321-3			*			*			*		
间隔跨接桥Staggered Jumper		*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)			*			*			*		
导线跨接桥Wire Jumper		*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)			*			*			*		
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		215701			225701			204701			206701			210701		
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		215801			225801			225801			225801			225801		

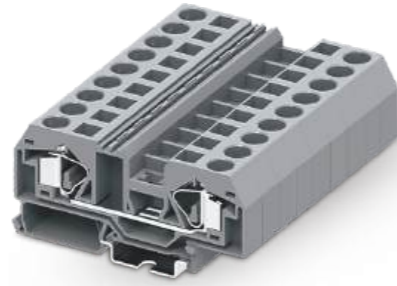


16mm<sup>2</sup> 一进一出接线端子  
1-1 Feed Through Terminal Block

尺寸Size		厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		12	93.8	45
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	76	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-16	0.2-16	0.2-10
	[AWG]	28-6	28-6	28-6
其余参数Other Parameters		V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94				
剥线长度Strip length	[mm]	16-17		
产品Product		颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	订货号Order NO.		
	橙Orange	216921		
	蓝Blue	216922		
		216923		
配套附件Accessory		订货号Order NO.		
端板Cover Plate		216121		
端板Cover Plate	灰Gray	216122		
	橙Orange	*		
	*	*		
跨接件Jumper		颜色Colour		
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		216301		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		








1.5mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

尺寸Size		厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		4	51.6	34.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	28-16	28-16	28-16
其余参数Other Parameters		V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94				
剥线长度Strip length	[mm]	8-9		
产品Product		颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	订货号Order NO.		
	*	215927		
	*	*		
		*		
配套附件Accessory		订货号Order NO.		
端板Cover Plate		215121		
端板Cover Plate	灰Gray	215122		
	橙Orange	*		
	*	*		
跨接件Jumper		颜色Colour		
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		215701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		215801		

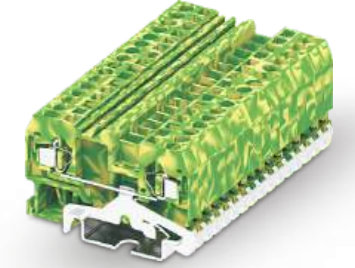

2.5mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

尺寸Size		厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		5	52.8	35.3
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
其余参数Other Parameters		V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94				
剥线长度Strip length	[mm]	8-9		
产品Product		颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	订货号Order NO.		
	*	225927		
	*	*		
		*		
配套附件Accessory		订货号Order NO.		
端板Cover Plate		225121		
端板Cover Plate	灰Gray	225122		
	橙Orange	*		
	*	*		
跨接件Jumper		颜色Colour		
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		225701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		

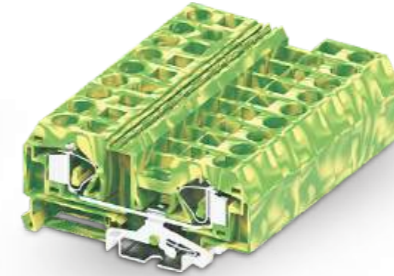

4mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

6mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

10mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

16mm<sup>2</sup> 一进一出接地端子  
1-1 Feed Through Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
<b>额定参数Rated Parameters</b>	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
<b>接线容量Wire Range</b>	
	[mm <sup>2</sup> ]
	[AWG]
<b>其余参数Other Parameters</b>	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]
<b>产品Product</b>	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*
<b>端板Cover Plate</b>	
端板Cover Plate	灰Gray
端板Cover Plate	橙Orange
<b>跨接件Jumper</b>	
跨接件Jumper	灰Gray
相邻跨接桥Adjacent Jumper	*
间隔跨接桥Staggered Jumper	*
导线跨接桥Wire Jumper	*
<b>安全警告标记 Protective Warning Marker</b>	
安全警告标记	5位PCS
正面标记和侧面标记Front And Side Marker	100PCS一片 (可提供印字服务Printing Service)

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	59	36
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
<b>订货信息Order Information</b>		
订货号Order NO.		
204927		
*		
*		
<b>配套附件Accessory</b>		
订货号Order NO.		
204121		
204122		
*		
订货号Order NO.		
204701		
225801		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8	73.6	40
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-6	0.2-4
28-10	28-10	28-10
<b>订货信息Order Information</b>		
订货号Order NO.		
206927		
*		
*		
<b>配套附件Accessory</b>		
订货号Order NO.		
206121		
206122		
*		
订货号Order NO.		
206701		
225801		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	76.7	42.5
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-10	0.2-10	0.2-6
28-8	28-8	28-8
<b>订货信息Order Information</b>		
订货号Order NO.		
210927		
*		
*		
<b>配套附件Accessory</b>		
订货号Order NO.		
210121		
210122		
*		
订货号Order NO.		
210701		
225801		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12	93.8	45
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-16	0.2-16	0.2-10
28-6	28-6	28-6
<b>订货信息Order Information</b>		
订货号Order NO.		
216927		
*		
*		
<b>配套附件Accessory</b>		
订货号Order NO.		
216121		
216122		
*		
订货号Order NO.		
216701		
225801		



6mm<sup>2</sup> 一进一出接线端子 (侧面标记)  
1-1 Feed Through Terminal Block (Side Marking)

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
8	62	38.5
IEC	UL	
800	600	
41	30	
接线容量Wire Range		
[mm <sup>2</sup> ]	刚性Solid 0.2-6	柔性Fine Stranded 0.2-6
[AWG]	28-10	带冷压头Furrule 0.2-4
		28-10
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	12-13	

订货信息Order Information

颜色Colour	订货号Order NO.
灰Gray	206911
橙Orange	206912
蓝Blue	206913

配套附件Accessory

订货号Order NO.
206111
206112
*



10mm<sup>2</sup> 一进一出接线端子 (侧面标记)  
1-1 Feed Through Terminal Block (Side Marking)

技术参数Technical Parameter


厚度Thickness	宽度Width	高度Height
10	69.5	41
IEC	UL	
800	600	
57	50	
接线容量Wire Range		
[mm <sup>2</sup> ]	刚性Solid 0.2-10	柔性Fine Stranded 0.2-10
[AWG]	28-8	带冷压头Furrule 0.2-6
		28-8
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	12-13	

订货信息Order Information

颜色Colour	订货号Order NO.
灰Gray	210911
橙Orange	210912
蓝Blue	210913

配套附件Accessory

订货号Order NO.
210111
210112
*

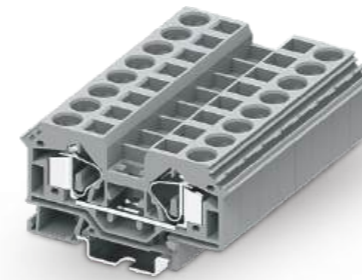

16mm<sup>2</sup> 一进一出接线端子 (侧面标记)  
1-1 Feed Through Terminal Block (Side Marking)

技术参数Technical Parameter

厚度Thickness	宽度Width	高度Height
12	80	45
IEC	UL	
800	600	
76	65	
接线容量Wire Range		
[mm <sup>2</sup> ]	刚性Solid 0.2-16	柔性Fine Stranded 0.2-16
[AWG]	28-6	带冷压头Furrule 0.2-10
		28-6
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	
剥线长度Strip length	16-17	

订货信息Order Information

颜色Colour	订货号Order NO.
灰Gray	216911
橙Orange	216912
蓝Blue	216913

配套附件Accessory

订货号Order NO.
216111
216122
*



尺寸Size	注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5
厚度Thickness	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray
	橙Orange
	蓝Blue
端板Cover Plate	颜色Colour
端板Cover Plate	灰Gray
	橙Orange
	*
跨接件Jumper	颜色Colour
相邻跨接桥Adjacent Jumper	灰Gray
间隔跨接桥Staggered Jumper	
导线跨接桥Wire Jumper	
安全警告标记 Protective Warning Marker	颜色Colour
5位PCS	
正面标记和侧面标记Front And Side Marker	颜色Colour
100PCS一片 (可提供印字服务Printing Service)	

颜色Colour	订货号Order NO.
灰Gray	206301
*	*
*	*
	206701
	225801

颜色Colour	订货号Order NO.
灰Gray	210301
*	*
*	*
	210701
	225801

颜色Colour	订货号Order NO.
灰Gray	216301
*	*
*	*
	216701
	225801





6mm<sup>2</sup>, 一进一出接地端子 (侧面标记)  
1-1 Feed Through Ground Terminal Block (Side Marking)

10mm<sup>2</sup>, 一进一出接地端子 (侧面标记)  
1-1 Feed Through Ground Terminal Block (Side Marking)






16mm<sup>2</sup>, 一进一出接地端子 (侧面标记)  
1-1 Feed Through Ground Terminal Block (Side Marking)

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*
端板Cover Plate	
端板Cover Plate	灰Gray
	橙Orange
	*
跨接件Jumper	
跨接件Jumper	灰Gray
相邻跨接桥Adjacent Jumper	
间隔跨接桥Staggered Jumper	
导线跨接桥Wire Jumper	
安全警告标记 Protective Warning Marker	
安全警告标记 Protective Warning Marker	
5位PCS	
正面标记和侧面标记Front And Side Marker	
正面标记和侧面标记 100PCS一片 (可提供印字服务Printing Service)	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8	62	38.5
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-6	0.2-4
28-10	28-10	28-10
其余参数Other Parameters		
	V0	
	12-13	
订货信息Order Information		
订货号Order NO.	206917	
	*	
	*	
配套附件Accessory		
订货号Order NO.	206111	
端板Cover Plate	206112	
	*	
跨接件Jumper	灰Gray	
	灰Gray	
相邻跨接桥Adjacent Jumper	*	
间隔跨接桥Staggered Jumper	*	
导线跨接桥Wire Jumper	*	
安全警告标记 Protective Warning Marker	5位PCS	
正面标记和侧面标记 100PCS一片 (可提供印字服务Printing Service)	225801	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	69.5	41
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-10	0.2-10	0.2-6
28-8	28-8	28-8
其余参数Other Parameters		
	V0	
	12-13	
订货信息Order Information		
订货号Order NO.	210917	
	*	
	*	
配套附件Accessory		
订货号Order NO.	210111	
端板Cover Plate	210112	
	*	
跨接件Jumper	灰Gray	
	灰Gray	
相邻跨接桥Adjacent Jumper	*	
间隔跨接桥Staggered Jumper	*	
导线跨接桥Wire Jumper	*	
安全警告标记 Protective Warning Marker	5位PCS	
正面标记和侧面标记 100PCS一片 (可提供印字服务Printing Service)	225801	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12	80	45
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-16	0.2-16	0.2-10
28-6	28-6	28-6
其余参数Other Parameters		
	V0	
	16-17	
订货信息Order Information		
订货号Order NO.	216917	
	*	
	*	
配套附件Accessory		
订货号Order NO.	216111	
端板Cover Plate	216122	
	*	
跨接件Jumper	灰Gray	
	灰Gray	
相邻跨接桥Adjacent Jumper	*	
间隔跨接桥Staggered Jumper	*	
导线跨接桥Wire Jumper	*	
安全警告标记 Protective Warning Marker	5位PCS	
正面标记和侧面标记 100PCS一片 (可提供印字服务Printing Service)	225801	



2.5mm² 一进一出侧面接线端子  
1-1 Feed Through Terminal Block of Side-entry







4mm² 一进一出侧面接线端子  
1-1 Feed Through Terminal Block of Side-entry

6mm² 一进一出侧面接线端子  
1-1 Feed Through Terminal Block of Side-entry

10mm² 一进一出侧面接线端子  
1-1 Feed Through Terminal Block of Side-entry

16mm² 一进一出侧面接线端子  
1-1 Feed Through Terminal Block of Side-entry

尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5	38.4	38	6	40.2	40	8	46	44.5	10	52.2	49	12	58.4	53
<b>额定参数Rated Parameters</b>		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current	[A]	24	20		32	20		41	30		57	50		76	65	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-6	0.2-6	0.2-4	0.2-10	0.2-10	0.2-6	0.2-16	0.2-16	0.2-10
	[AWG]	28-14	28-14	28-14	28-12	28-12	28-12	28-10	28-10	28-10	28-8	28-8	28-8	28-6	28-6	28-6
<b>其余参数Other Parameters</b>		V0			V0			V0			V0			V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		8-9			9-10			12-13			12-13			16-17		
剥线长度Strip length	[mm]															
<b>产品Product</b>	颜色Colour	<b>订货信息Order Information</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
	橙Orange	225915			204901			206901			210901			216901		
	蓝Blue	*			*			*			*			*		
		225916			204902			206902			210902			216902		
<b>配套附件Accessory</b>		<b>配套附件Accessory</b>			<b>配套附件Accessory</b>			<b>配套附件Accessory</b>			<b>配套附件Accessory</b>			<b>配套附件Accessory</b>		
端板Cover Plate		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
	灰Gray	225111			204101			206101			210101			216101		
端板Cover Plate	橙Orange	225112			204102			206102			210102			216102		
	*	*			*			*			*			*		
<b>跨接件Jumper</b>	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
	灰Gray	225301			204301			206301			210301			216301		
相邻跨接桥Adjacent Jumper		*			*			*			*			*		
间隔跨接桥Staggered Jumper		*			*			*			*			*		
导线跨接桥Wire Jumper		*			*			*			*			*		
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
5位PCS		225701			204701			206701			210701			216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801			225801			225801			225801			225801		



2.5mm² 一进一出侧面接地端子  
1-1 Feed Through Ground Terminal Block of Side-entry





4mm² 一进一出侧面接地端子  
1-1 Feed Through Ground Terminal Block of Side-entry

6mm² 一进一出侧面接地端子  
1-1 Feed Through Ground Terminal Block of Side-entry

10mm² 一进一出侧面接地端子  
1-1 Feed Through Ground Terminal Block of Side-entry

16mm² 一进一出侧面接地端子  
1-1 Feed Through Ground Terminal Block of Side-entry

尺寸Size	技术参数Technical Parameter			厚度Thickness	宽度Width	高度Height
	厚度Thickness	宽度Width	高度Height			
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	5	38.4	38		
<b>额定参数Rated Parameters</b>		IEC	UL			
额定电压Rated Voltage	[V]	*	*			
额定电流Rated Current	[A]	*	*			
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule		
	[mm²]	0.2-2.5	0.2-2.5	0.2-1.5		
	[AWG]	28-14	28-14	28-14		
<b>其余参数Other Parameters</b>						
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0				
剥线长度Strip length	[mm]	8-9				
<b>产品Product</b>	颜色Colour	<b>订货信息Order Information</b>				
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green	订货号Order NO.	225917		订货号Order NO.	204907
	*		*			*
	*		*			*
<b>端板Cover Plate</b>		<b>配套附件Accessory</b>				
	灰Gray	订货号Order NO.	225111		订货号Order NO.	204101
	橙Orange	订货号Order NO.	225112		订货号Order NO.	204102
	*		*			*
<b>跨接件Jumper</b>	颜色Colour	<b>跨接件Jumper</b>				
	灰Gray	订货号Order NO.			订货号Order NO.	
相邻跨接桥Adjacent Jumper			*			*
间隔跨接桥Staggered Jumper			*			*
导线跨接桥Wire Jumper			*			*
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.	225701		订货号Order NO.	204701
5位PCS			225701			210701
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.	225801		订货号Order NO.	216701
100PCS一片 (可提供印字服务Printing Service)			225801			225801

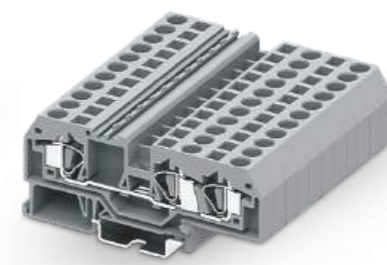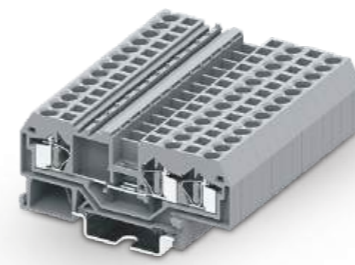

1.5mm² 一进两出接线端子  
1-2 Feed Through Terminal Block

2.5mm² 一进两出接线端子  
1-2 Feed Through Terminal Block

4mm² 一进两出接线端子  
1-2 Feed Through Terminal Block

6mm² 一进两出接线端子  
1-2 Feed Through Terminal Block


10mm² 一进两出接线端子  
1-2 Feed Through Terminal Block

尺寸Size	技术参数Technical Parameter			厚度Thickness	宽度Width	高度Height
	厚度Thickness	宽度Width	高度Height			
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	4	62.1	34.5		
<b>额定参数Rated Parameters</b>		IEC	UL			
额定电压Rated Voltage	[V]	800	600			
额定电流Rated Current	[A]	18	10			
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule		
	[mm²]	0.2-1.5	0.2-1.5	0.2-1		
	[AWG]	28-16	28-16	28-16		
<b>其余参数Other Parameters</b>						
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0				
剥线长度Strip length	[mm]	8-9				
<b>产品Product</b>	颜色Colour	<b>订货信息Order Information</b>			<b>订货信息Order Information</b>	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	订货号Order NO.			订货号Order NO.	
	橙Orange	215951			225951	
	蓝Blue	215952			225952	
		215954			225954	
<b>配套附件Accessory</b>		<b>配套附件Accessory</b>			<b>配套附件Accessory</b>	
<b>端板Cover Plate</b>		订货号Order NO.			订货号Order NO.	
	灰Gray	215151			225151	
	橙Orange	215152			225152	
	*	*			*	
<b>跨接件Jumper</b>	颜色Colour	订货号Order NO.			订货号Order NO.	
	灰Gray	订货号Order NO.			订货号Order NO.	
相邻跨接桥Adjacent Jumper		215301			225301	
间隔跨接桥Staggered Jumper		*			225321-3	
导线跨接桥Wire Jumper		*			225311(L=60mm) 225312(L=110mm) 225313(L=250mm)	
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.			订货号Order NO.	
5位PCS		215701			225701	
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.			订货号Order NO.	
100PCS一片 (可提供印字服务Printing Service)		215801			225801	




16mm<sup>2</sup> 一进两出接线端子  
1-2 Feed Through Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		12	103.5	45
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	76	65	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-16	0.2-16	0.2-10
[AWG]		28-6	28-6	28-6
其余参数Other Parameters		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		16-17		
产品Product		颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		灰Gray	216951	
		橙Orange	216952	
		蓝Blue	216953	
端板Cover Plate		订货号Order NO.		
端板Cover Plate		灰Gray	216151	
		橙Orange	216152	
		*	*	
跨接件Jumper		颜色Colour		
相邻跨接桥Adjacent Jumper		灰Gray	订货号Order NO.	
			*	
间隔跨接桥Staggered Jumper			*	
导线跨接桥Wire Jumper			*	
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		216701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		

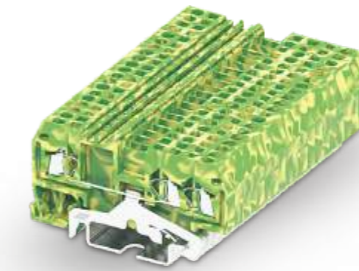




1.5mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		4	62.1	34.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-1.5	0.2-1.5	0.2-1
[AWG]		28-16	28-16	28-16
其余参数Other Parameters		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		8-9		
产品Product		颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		黄绿Yellow green	215957	
		*	*	
		*	*	
端板Cover Plate		订货号Order NO.		
端板Cover Plate		灰Gray	215151	
		橙Orange	215152	
		*	*	
跨接件Jumper		颜色Colour		
相邻跨接桥Adjacent Jumper		灰Gray	订货号Order NO.	
			*	
间隔跨接桥Staggered Jumper			*	
导线跨接桥Wire Jumper			*	
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		215701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		215801		

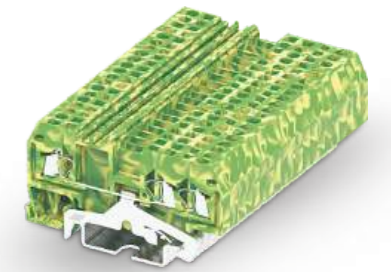

2.5mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		5	64.4	35.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-2.5	0.2-2.5	0.2-1.5
[AWG]		28-14	28-14	28-14
其余参数Other Parameters		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		8-9		
产品Product		颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5		黄绿Yellow green	225957	
		*	*	
		*	*	
端板Cover Plate		订货号Order NO.		
端板Cover Plate		灰Gray	225151	
		橙Orange	225152	
		*	*	
跨接件Jumper		颜色Colour		
相邻跨接桥Adjacent Jumper		灰Gray	订货号Order NO.	
			*	
间隔跨接桥Staggered Jumper			*	
导线跨接桥Wire Jumper			*	
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		225701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		

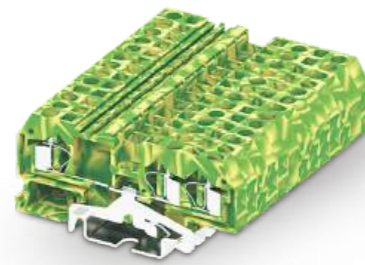

4mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

6mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

10mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

16mm<sup>2</sup> 一进两出接地端子  
1-2 Feed Through Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
<b>额定参数Rated Parameters</b>	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
<b>接线容量Wire Range</b>	
	[mm <sup>2</sup> ]
	[AWG]
<b>其余参数Other Parameters</b>	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]
<b>产品Product</b>	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green
<b>端板Cover Plate</b>	灰Gray
端板Cover Plate	橙Orange
<b>跨接件Jumper</b>	颜色Colour
相邻跨接桥Adjacent Jumper	灰Gray
间隔跨接桥Staggered Jumper	
导线跨接桥Wire Jumper	
<b>安全警告标记 Protective Warning Marker</b>	
5位PCS	
<b>正面标记和侧面标记Front And Side Marker</b>	
100PCS一片 (可提供印字服务Printing Service)	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	73.5	36
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
V0		
9-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8	92.2	40
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-6	0.2-4
28-10	28-10	28-10
V0		
12-13		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	96.6	42.5
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-10	0.2-10	0.2-6
28-8	28-8	28-8
V0		
12-13		






技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12	103.5	45
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-16	0.2-16	0.2-10
28-6	28-6	28-6
V0		
16-17		

订货信息Order Information	
订货号Order NO.	204957
配套附件Accessory	
端板Cover Plate	灰Gray: 204151, 橙Orange: 204152
跨接件Jumper	灰Gray: 相邻跨接桥Adjacent Jumper, 间隔跨接桥Staggered Jumper, 导线跨接桥Wire Jumper
安全警告标记 Protective Warning Marker	5位PCS: 204701
正面标记和侧面标记 Front And Side Marker	100PCS一片 (可提供印字服务Printing Service): 225801





订货信息Order Information	
订货号Order NO.	206957
配套附件Accessory	
端板Cover Plate	灰Gray: 206151, 橙Orange: 206152
跨接件Jumper	灰Gray: 相邻跨接桥Adjacent Jumper, 间隔跨接桥Staggered Jumper, 导线跨接桥Wire Jumper
安全警告标记 Protective Warning Marker	5位PCS: 206701
正面标记和侧面标记 Front And Side Marker	100PCS一片 (可提供印字服务Printing Service): 225801

订货信息Order Information	
订货号Order NO.	210957
配套附件Accessory	
端板Cover Plate	灰Gray: 210151, 橙Orange: 210152
跨接件Jumper	灰Gray: 相邻跨接桥Adjacent Jumper, 间隔跨接桥Staggered Jumper, 导线跨接桥Wire Jumper
安全警告标记 Protective Warning Marker	5位PCS: 210701
正面标记和侧面标记 Front And Side Marker	100PCS一片 (可提供印字服务Printing Service): 225801


订货信息Order Information	
订货号Order NO.	216957
配套附件Accessory	
端板Cover Plate	灰Gray: 216151, 橙Orange: 216152
跨接件Jumper	灰Gray: 相邻跨接桥Adjacent Jumper, 间隔跨接桥Staggered Jumper, 导线跨接桥Wire Jumper
安全警告标记 Protective Warning Marker	5位PCS: 216701
正面标记和侧面标记 Front And Side Marker	100PCS一片 (可提供印字服务Printing Service): 225801

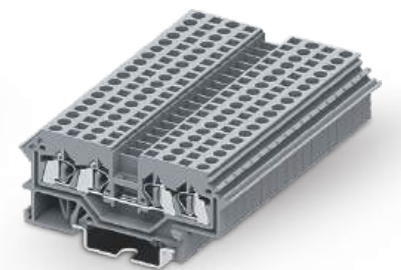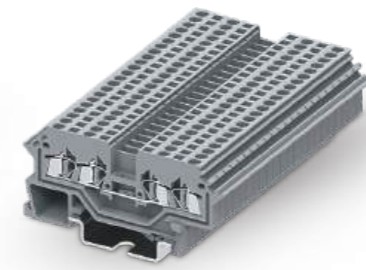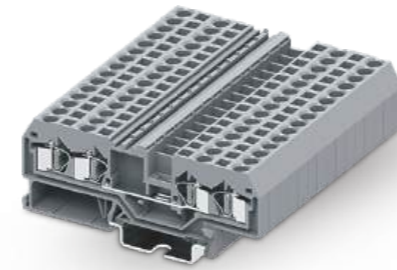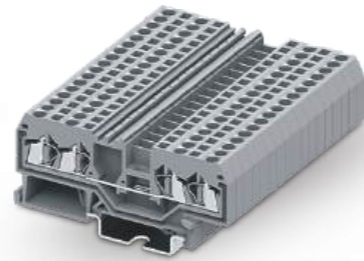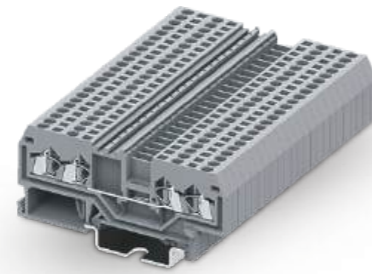1.5mm<sup>2</sup> 两进两出接线端子  
2-2 Feed Through Terminal Block2.5mm<sup>2</sup> 两进两出接线端子  
2-2 Feed Through Terminal Block4mm<sup>2</sup> 两进两出接线端子  
2-2 Feed Through Terminal Block1.5mm<sup>2</sup> 两进两出接线端子(侧面标记)  
2-2 Feed Through Terminal Block(Side Marking)2.5mm<sup>2</sup> 两进两出接线端子(侧面标记)  
2-2 Feed Through Terminal Block(Side Marking)


尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter								
	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height						
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	4	72.6	34.5	5	75.9	35.5	6	86.2	36	4	68	34.5	5	73	35.5					
<b>额定参数Rated Parameters</b>		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL						
额定电压Rated Voltage	[V]	800	600		800	600		800	600		800	600		800	600						
额定电流Rated Current	[A]	18	10		24	20		32	20		18	10		24	20						
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule					
	[mm <sup>2</sup> ]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5					
	[AWG]	28-16	28-16	28-16	28-14	28-14	28-14	28-12	28-12	28-12	28-16	28-16	28-16	28-14	28-14	28-14					
<b>其余参数Other Parameters</b>		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0			V0							
剥线长度Strip length	[mm]	8-9			8-9			9-10			8-9			8-9							
<b>产品Product</b>	颜色Colour	<b>订货信息Order Information</b>				<b>订货信息Order Information</b>				<b>订货信息Order Information</b>				<b>订货信息Order Information</b>							
	灰Gray	订货号Order NO.				订货号Order NO.				订货号Order NO.				订货号Order NO.							
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	橙Orange	215931				225931				204931				215901				225901			
	蓝Blue	215932				225932				204932				*				*			
		215934				225934				204934				215902				225902			
<b>端板Cover Plate</b>		<b>配套附件Accessory</b>				<b>配套附件Accessory</b>				<b>配套附件Accessory</b>				<b>配套附件Accessory</b>							
	灰Gray	订货号Order NO.				订货号Order NO.				订货号Order NO.				订货号Order NO.							
	橙Orange	215131				225131				204131				215101				225101			
	*	215132				225132				204132				215102				225102			
		*				*				*				*				*			
<b>跨接件Jumper</b>	颜色Colour	<b>跨接件Jumper</b>				<b>跨接件Jumper</b>				<b>跨接件Jumper</b>				<b>跨接件Jumper</b>							
	灰Gray	订货号Order NO.				订货号Order NO.				订货号Order NO.				订货号Order NO.							
相邻跨接桥Adjacent Jumper		215301				225301				204301				215301				225301			
间隔跨接桥Staggered Jumper		*				225321-3				*				*				225321-3			
导线跨接桥Wire Jumper		*				225311(L=60mm) 225312(L=110mm) 225313(L=250mm)				*				*				225311(L=60mm) 225312(L=110mm) 225313(L=250mm)			
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.				订货号Order NO.				订货号Order NO.				订货号Order NO.							
5位PCS		215701				225701				204701				215701				225701			
<b>正面标记和侧面标记 Front And Side Marker</b>		订货号Order NO.				订货号Order NO.				订货号Order NO.				订货号Order NO.							
100PCS一片 (可提供印字服务Printing Service)		215801				225801				225801				215801				225801			

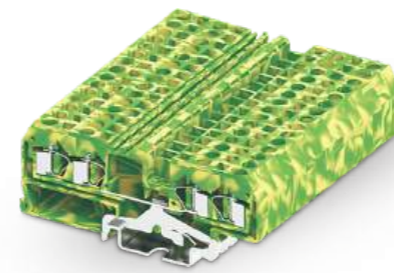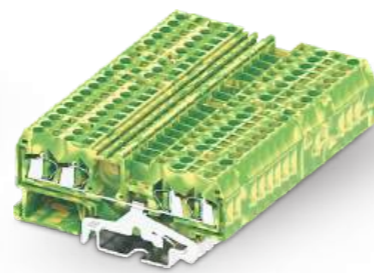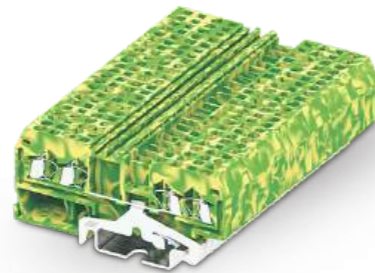

1.5mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block



2.5mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block



4mm<sup>2</sup> 两进两出接地端子  
2-2 Feed Through Ground Terminal Block




尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
<b>额定参数Rated Parameters</b>	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
<b>接线容量Wire Range</b>	
	[mm <sup>2</sup> ]
	[AWG]
<b>其余参数Other Parameters</b>	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length	[mm]
<b>产品Product</b>	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*
<b>端板Cover Plate</b>	
端板Cover Plate	灰Gray
端板Cover Plate	橙Orange
<b>跨接件Jumper</b>	
跨接件Jumper	灰Gray
相邻跨接桥Adjacent Jumper	
间隔跨接桥Staggered Jumper	
导线跨接桥Wire Jumper	
<b>安全警告标记 Protective Warning Marker</b>	
安全警告标记 Protective Warning Marker	
5位PCS	
<b>正面标记和侧面标记Front And Side Marker</b>	
正面标记和侧面标记 Front And Side Marker	
100PCS一片 (可提供印字服务Printing Service)	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
4	72.6	34.5
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1
28-16	28-16	28-16
<b>订货信息Order Information</b>		
订货号Order NO.		
215947		
*		
*		
<b>配套附件Accessory</b>		
订货号Order NO.		
215131		
215132		
*		
订货号Order NO.		
215701		
215801		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5	75.9	35.5
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-14	28-14	28-14
<b>订货信息Order Information</b>		
订货号Order NO.		
225947		
*		
*		
<b>配套附件Accessory</b>		
订货号Order NO.		
225131		
225132		
*		
订货号Order NO.		
225701		
225801		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	86.2	36
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
<b>订货信息Order Information</b>		
订货号Order NO.		
204947		
*		
*		
<b>配套附件Accessory</b>		
订货号Order NO.		
204131		
204132		
*		
订货号Order NO.		
204701		
225801		



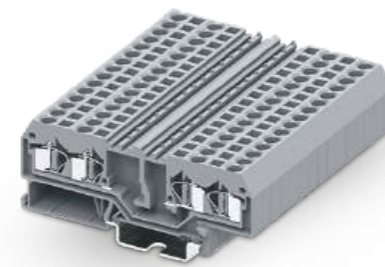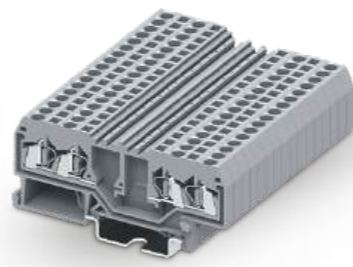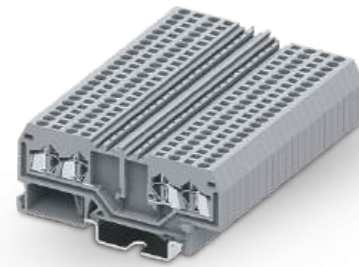

1.5mm<sup>2</sup> 两进两出分断式接线端子  
2-2 Feed Through Disconnect Terminal Block

2.5mm<sup>2</sup> 两进两出分断式接线端子  
2-2 Feed Through Disconnect Terminal Block

4mm<sup>2</sup> 两进两出分断式接线端子  
2-2 Feed Through Disconnect Terminal Block

1.5mm<sup>2</sup> 两进两出分断式接线端子(侧面标记)  
2-2 Feed Through Disconnect Terminal Block Rail(Side Marking)

2.5mm<sup>2</sup> 两进两出分断式接线端子(侧面标记)  
2-2 Feed Through Disconnect Terminal Block(Side Marking)

	1.5mm <sup>2</sup> 两进两出分断式接线端子 2-2 Feed Through Disconnect Terminal Block			2.5mm <sup>2</sup> 两进两出分断式接线端子 2-2 Feed Through Disconnect Terminal Block			4mm <sup>2</sup> 两进两出分断式接线端子 2-2 Feed Through Disconnect Terminal Block			1.5mm <sup>2</sup> 两进两出分断式接线端子(侧面标记) 2-2 Feed Through Disconnect Terminal Block Rail(Side Marking)			2.5mm <sup>2</sup> 两进两出分断式接线端子(侧面标记) 2-2 Feed Through Disconnect Terminal Block(Side Marking)						
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter						
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height				
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	4	72.6	34.5	5	75.9	35.5	6	86.2	36	4	68	34.5	5	73	35.5			
<b>额定参数Rated Parameters</b>	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL		
额定电压Rated Voltage	[V]	800	600		800	600		800	600		800	600		800	600		800	600	
额定电流Rated Current	[A]	18	10		24	20		32	20		18	10		24	20		24	20	
<b>接线容量Wire Range</b>	[mm <sup>2</sup> ]	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[AWG]	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-4	0.2-4	0.2-2.5	0.2-1.5	0.2-1.5	0.2-1	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5
		28-16	28-16	28-16	28-14	28-14	28-14	28-12	28-12	28-12	28-16	28-16	28-16	28-14	28-14	28-14	28-14	28-14	28-14
<b>其余参数Other Parameters</b>																			
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0			V0			V0			V0					
剥线长度Strip length	[mm]	8-9			8-9			9-10			8-9			8-9					
<b>产品Product</b>	颜色Colour	<b>订货信息Order Information</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>					
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
	橙Orange	215936			225936			204936			215903			225903					
	蓝Blue	215937			225937			204937			*			*					
		215939			225939			204939			215904			225904					
<b>配套附件Accessory</b>		<b>配套附件Accessory</b>			<b>配套附件Accessory</b>			<b>配套附件Accessory</b>			<b>配套附件Accessory</b>			<b>配套附件Accessory</b>					
端板Cover Plate	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
	橙Orange	215131			225131			204131			215101			225101					
	*	215132			225132			204132			215102			225102					
		*			*			*			*			*					
<b>跨接件Jumper</b>	颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
	灰Gray	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
相邻跨接桥Adjacent Jumper		*			*			*			*			*					
间隔跨接桥Staggered Jumper		*			*			*			*			*					
导线跨接桥Wire Jumper		*			*			*			*			*					
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
5位PCS		215701			225701			204701			215701			225701					
正面标记和侧面标记Front And Side Marker		订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.					
100PCS一片 (可提供印字服务Printing Service)		215801			225801			225801			225801			225801					




2.5mm<sup>2</sup> 两进两出分断式保险丝接线端子(侧面标记)  
2-2 Feed Through Fuse Terminal Block With Interrupted Power Rail(Side Marking)

保险丝盒订货号:  
225221(可接发光管220V)、225231(普通型)  
适用于: 225908、G型  
保险管规格5x20mm和5x25mm


Fuse Box P/N:  
225221(For LED Light 220V), 225231(Normal Type)  
App for: 225908, G Type  
Fuse Size: 5x20mm, 5x25mm

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	厚度Thickness	宽度Width	高度Height
		5	72.6	35.5
<b>额定参数Rated Parameters</b>		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
<b>其余参数Other Parameters</b>				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		
<b>产品Product</b>		<b>订货信息Order Information</b>		
颜色Colour		订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	225908		
	橙Orange	*		
	蓝Blue	*		
<b>配套附件Accessory</b>				
端板Cover Plate		订货号Order NO.		
	灰Gray	225101		
端板Cover Plate	橙Orange	225102		
	*	*		
跨接件Jumper	颜色Colour	订货号Order NO.		
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		225701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		



2.5mm<sup>2</sup> 一进两出斜面接线端子  
1-2 Feed Through Angled Type Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	厚度Thickness	宽度Width	高度Height
		5	50	43.5
<b>额定参数Rated Parameters</b>		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
<b>其余参数Other Parameters</b>				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		
<b>产品Product</b>		<b>订货信息Order Information</b>		
颜色Colour		订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	225961		
	橙Orange	225962		
	蓝Blue	225963		
<b>配套附件Accessory</b>				
端板Cover Plate		订货号Order NO.		
	灰Gray	225161		
端板Cover Plate	橙Orange	225162		
	*	*		
跨接件Jumper	颜色Colour	订货号Order NO.		
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		225301		
间隔跨接桥Staggered Jumper		225321-3		
导线跨接桥Wire Jumper		225311(L=60mm) 225312(L=110mm) 225313(L=250mm)		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		225701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		

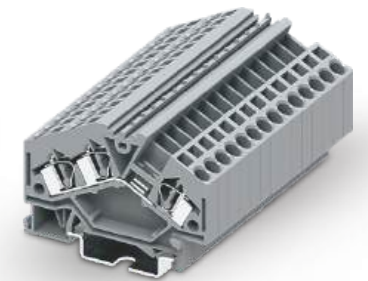



4mm<sup>2</sup> 一进两出斜面接线端子  
1-2 Feed Through Angled Type Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]	厚度Thickness	宽度Width	高度Height
		6	61.2	43.5
<b>额定参数Rated Parameters</b>		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	32	20	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-4	0.2-4	0.2-2.5
	[AWG]	28-12	28-12	28-12
<b>其余参数Other Parameters</b>				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	9-10		
<b>产品Product</b>		<b>订货信息Order Information</b>		
颜色Colour		订货号Order NO.		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	204961		
	橙Orange	204962		
	蓝Blue	204963		
<b>配套附件Accessory</b>				
端板Cover Plate		订货号Order NO.		
	灰Gray	204161		
端板Cover Plate	橙Orange	204162		
	*	*		
跨接件Jumper	颜色Colour	订货号Order NO.		
	灰Gray	订货号Order NO.		
相邻跨接桥Adjacent Jumper		204301		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		204701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		




2.5mm<sup>2</sup> 两进两出斜面接线端子  
2-2 Feed Through Angled Type Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		5	50.2	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-2.5	0.2-2.5	0.2-1.5
[AWG]		28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
灰Gray		225965		
橙Orange		225966		
蓝Blue		225967		
配套附件Accessory				
端板Cover Plate		订货号Order NO.		
灰Gray		225161		
橙Orange		225162		
*		*		
跨接件Jumper		订货号Order NO.		
灰Gray		订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		225701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		




2.5mm<sup>2</sup> 一进两出斜面接地端子  
1-2 Feed Through Ground Angled Type Terminal Block

尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		5	50	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-2.5	0.2-2.5	0.2-1.5
[AWG]		28-14	28-14	28-14
其余参数Other Parameters				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	8-9		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
黄绿Yellow green		225964		
*		*		
*		*		
配套附件Accessory				
端板Cover Plate		订货号Order NO.		
灰Gray		225161		
橙Orange		225162		
*		*		
跨接件Jumper		订货号Order NO.		
灰Gray		订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		225701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		

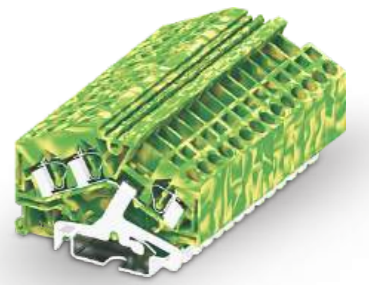


4mm<sup>2</sup> 一进两出斜面接地端子  
1-2 Feed Through Ground Angled Type Terminal Block


尺寸Size		技术参数Technical Parameter		
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5		厚度Thickness	宽度Width	高度Height
[mm]		6	61.2	43.5
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	*	*	
额定电流Rated Current	[A]	*	*	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-4	0.2-4	0.2-2.5
[AWG]		28-12	28-12	28-12
其余参数Other Parameters				
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0		
剥线长度Strip length	[mm]	9-10		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
黄绿Yellow green		204964		
*		*		
*		*		
配套附件Accessory				
端板Cover Plate		订货号Order NO.		
灰Gray		204161		
橙Orange		204162		
*		*		
跨接件Jumper		订货号Order NO.		
灰Gray		订货号Order NO.		
相邻跨接桥Adjacent Jumper		*		
间隔跨接桥Staggered Jumper		*		
导线跨接桥Wire Jumper		*		
安全警告标记 Protective Warning Marker		订货号Order NO.		
5位PCS		204701		
正面标记和侧面标记Front And Side Marker		订货号Order NO.		
100PCS一片 (可提供印字服务Printing Service)		225801		



1.5mm<sup>2</sup> 一针一线插拔式接线端子  
1-1 Feed Through Pluggable Terminal Block



2.5mm<sup>2</sup> 一针一线插拔式接线端子  
1-1 Feed Through Pluggable Terminal Block

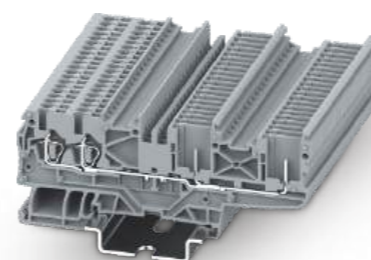

1.5mm<sup>2</sup> 两针两线插拔式接线端子  
2-2 Feed Through Pluggable Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
<b>额定参数Rated Parameters</b>	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
<b>接线容量Wire Range</b>	
	[mm <sup>2</sup> ]
	[AWG]
<b>其余参数Other Parameters</b>	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
<b>产品Product</b>	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray
	橙Orange
	蓝Blue
<b>端板Cover Plate</b>	
端板Cover Plate	灰Gray
	橙Orange
	*
<b>跨接件Jumper</b>	颜色Colour
	灰Gray
相邻跨接桥Adjacent Jumper	
间隔跨接桥Staggered Jumper	
导线跨接桥Wire Jumper	
<b>安全警告标记 Protective Warning Marker</b>	
5位PCS	
<b>正面标记和侧面标记Front And Side Marker</b>	
100PCS一片 (可提供印字服务Printing Service)	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	49.5	29.6
IEC	UL	
500	300	
13.5	10	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1
24-16	24-16	24-16
V0		
8-9		

订货信息Order Information	
订货号Order NO.	2150-1201
	2150-1202
	2150-1204

配套附件Accessory	
订货号Order NO.	2150-1291
	2150-1292
	*

订货号Order NO.	2150-302~2150-320
	注: (2-20位梳状跨接桥)
	2150-402~2150-410
	注: (2-20位跨盖板跨接桥)
	*

订货号Order NO.	215701
订货号Order NO.	2150-801

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5	53	35.5
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-14	28-14	28-14
V0		
8-9		

订货信息Order Information	
订货号Order NO.	225981
	225982
	225984

配套附件Accessory	
订货号Order NO.	225181
	225182
	*

订货号Order NO.	225301
	225321-3
	225311(L=60mm)
	225312(L=110mm)
	225313(L=250mm)
	*

订货号Order NO.	225701
订货号Order NO.	225801


技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	85.8	29.6
IEC	UL	
500	300	
13.5	10	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1
24-16	24-16	24-16
V0		
8-9		

订货信息Order Information	
订货号Order NO.	2150-1401
	2150-1402
	2150-1404

配套附件Accessory	
订货号Order NO.	2150-1491
	2150-1492
	*

订货号Order NO.	2150-302~2150-320
	2150-402~2150-410
	*



订货号Order NO.	215701
订货号Order NO.	2150-801




1.5mm² 一针一线插拔式接地端子  
1-1 Feed Through Ground Pluggable Terminal Block



2.5mm² 一针一线插拔式接地端子  
1-1 Feed Through Ground Pluggable Terminal Block

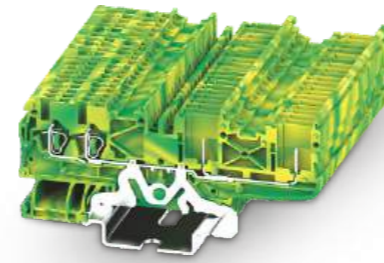

1.5mm² 两针两线插拔式接地端子  
2-2 Feed Through Ground Pluggable Terminal Block

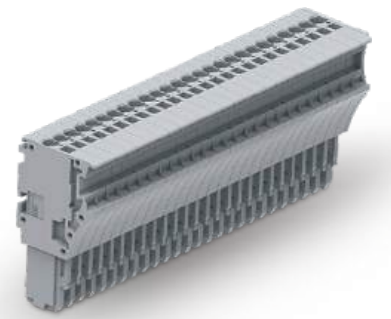

1.5mm² 插头  
Plug

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	49.5	29.6
IEC		
*	*	
UL		
*	*	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1
24-16	24-16	24-16
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5	53	35.5
IEC		
*	*	
UL		
*	*	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-14	28-14	28-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	85.8	29.6
IEC		
*	*	
UL		
*	*	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1
24-16	24-16	24-16
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
8-9		

尺寸Size		
		[mm]
(P*3.5+1)	38.95	21.5
额定参数Rated Parameters		
额定电压Rated Voltage	[V]	
额定电流Rated Current	[A]	
接线容量Wire Range		
		[mm²]
		[AWG]
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
(P*3.5+1)	38.95	21.5
IEC		
500	300	
UL		
13.5	10	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1
24-16	24-16	24-16
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length		
8-9		

产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*

订货信息Order Information	
订货号Order NO.	2150-1207
	*
	*

订货信息Order Information	
订货号Order NO.	225987
	*
	*

订货信息Order Information	
订货号Order NO.	2150-1407
	*
	*

产品Product	位数Pole No.	颜色Colour
	1	灰Gray
	...	...
	15	灰Gray

订货信息Order Information	
订货号Order NO.	2150-101
	...
	2150-115

配套附件Accessory	
端板Cover Plate	灰Gray
端板Cover Plate	橙Orange

配套附件Accessory	
订货号Order NO.	2150-1291
	2150-1292

配套附件Accessory	
订货号Order NO.	225181
	225182

配套附件Accessory	
订货号Order NO.	2150-1491
	2150-1492

配套附件Accessory	
端板Cover Plate	灰Gray
端板Cover Plate (2150-1XX已包含盖板)	橙Orange

配套附件Accessory	
订货号Order NO.	*
	*
	*

跨接件Jumper	
颜色Colour	灰Gray
相邻跨接桥Adjacent Jumper	
间隔跨接桥Staggered Jumper	
导线跨接桥Wire Jumper	

跨接件Jumper	
订货号Order NO.	*
	*
	*

跨接件Jumper	
订货号Order NO.	*
	*
	*

跨接件Jumper	
订货号Order NO.	*
	*
	*

跨接件Jumper	
颜色Colour	灰Gray
相邻跨接桥Adjacent Jumper	
间隔跨接桥Staggered Jumper	
导线跨接桥Wire Jumper	

跨接件Jumper	
订货号Order NO.	*
	*
	*

安全警告标记 Protective Warning Marker	
5位PCS	
正面标记和侧面标记Front And Side Marker	
100PCS一片 (可提供印字服务Printing Service)	

安全警告标记 Protective Warning Marker	
订货号Order NO.	215701
	215701
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	2150-801

安全警告标记 Protective Warning Marker	
订货号Order NO.	225701
	225701
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	225801

安全警告标记 Protective Warning Marker	
订货号Order NO.	215701
	215701
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	2150-801

安全警告标记 Protective Warning Marker	
订货号Order NO.	215701
	215701
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	2150-801



安全警告标记 Protective Warning Marker	
订货号Order NO.	215701
	215701
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	2150-801

## UK系列螺钉接线端子

### UK Rail-mounted Terminal Blocks With Screw Clamp

UK系列螺钉接线端子使用螺钉压线框技术，能够完成各种客户需求的端子组合并提供丰富的组合端子附件供客户挑选使用。能够最大程度的保证客户操作的舒适性，既节省了占用空间又便于操作实现。广泛应用于各种低压电力设备的控制连接转换。产品设计制造符合IEC60947、UL1059等国际标准，并取得CQC、UL、VDE、TUV、CE、ROHS等认证。

UK series rail-mounted screw terminal blocks use screw pressure wire frame technology, is able to complete the terminal connection of a variety of customers' needs and provide a rich combination of terminal accessories. Able to ensure the greatest degree of customers operations comfort, save space and easy to operate. It widely used in the control of the respective low-voltage electrical equipment. Product design and manufacturing in line with relevant international standards such as IEC60947, UL1059 and achieved CQC, UL, VDE, CE, ROHS certification.

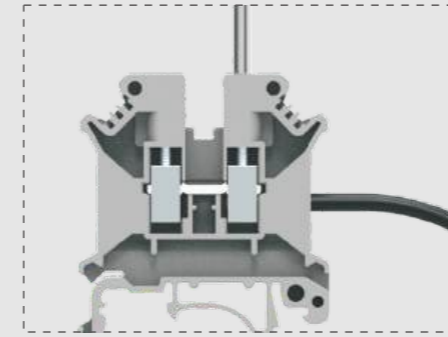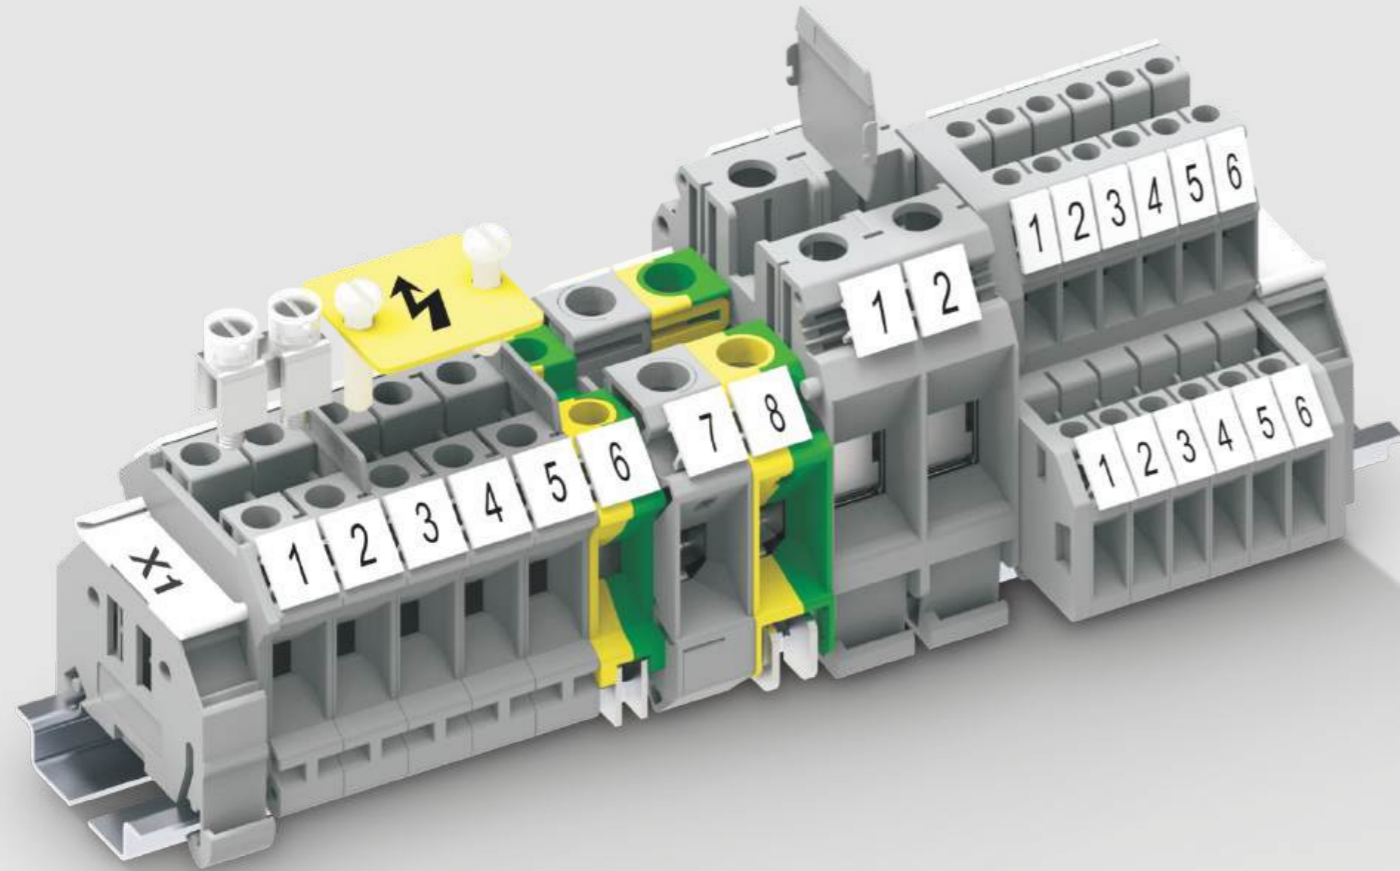

螺钉接线 Screw Connection

- ▲ 具有稳定优良的接触特性，连接可靠，接触应用广泛
- ▲ It has stable contact characteristics, reliable connection and widely used




螺钉材料 Screw Material

- ▲ 具有铜/钢两种材料的螺钉，为客户提供多种选择
- ▲ Material option: Brass or steel



标识 Marking

- ▲ 清晰的标记可为端子的安装提供安全、快速的保障
- ▲ Clear marking can provide safety and fast guarantee for terminal installation

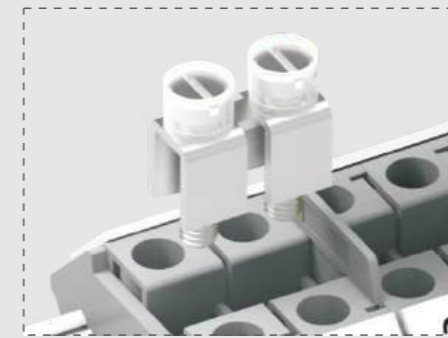


跨接系统 Jumper Connector System

- ▲ 使用螺钉固定的跨接件
- ▲ Use the jumper fixed with screws




警告标识 Warning Marker

- ▲ 大片的标识，明显的标识出警告位置
- ▲ Big maker, clearly indicate the warning position

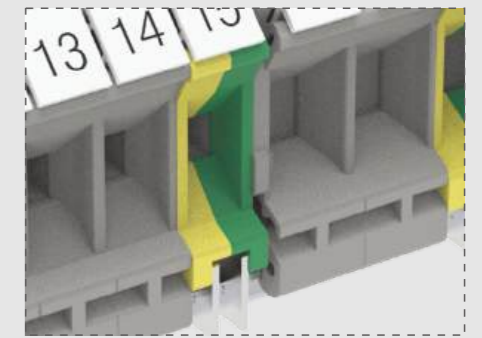


端子挡板 Terminal Board

- ▲ 可对端子进行清晰的分组
- ▲ Terminal blocks can be grouped clearly

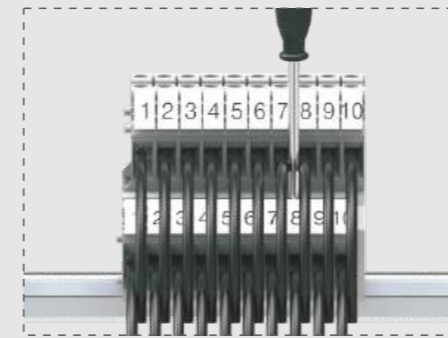


双层端子 Double Deck Terminal Block

- ▲ 上下两层采用错开设计：便于螺丝刀对于下层的操作，可看清下层的标记和导线
- ▲ Staggered design for upper and lower layer: Easy for the screwdriver to operate the lower layer, and can see the marking and wire clearly in lower layer

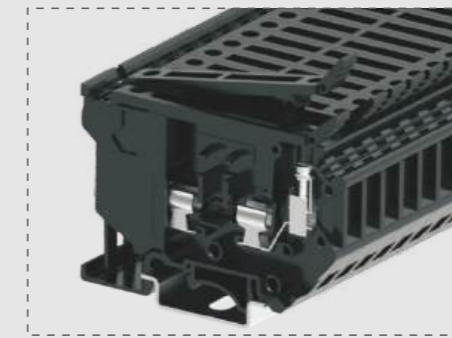






保险管端子 Terminal Block With Fuse

- ▲ 内部安装保险管，可满足相应电路设计
- ▲ Install the fuse inside, to meet the corresponding circuit design

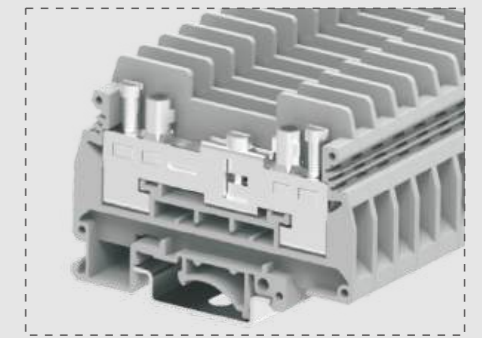

分断测试端子 Disconnect Test Terminal Block

- ▲ 可实现电流互感器二次回路的各种测试连接
- ▲ Can achieve the various testing connect of secondary circuit of current transformer



1.5mm<sup>2</sup> UK接线端子  
UK Terminal Block

2.5mm<sup>2</sup> UK接线端子  
UK Terminal Block

2.5mm<sup>2</sup> UK接线端子  
UK Terminal Block

4mm<sup>2</sup> UK接线端子  
UK Terminal Block

6mm<sup>2</sup> UK接线端子  
UK Terminal Block

尺寸Size	
厚度Thickness	4.2
宽度Width	42.5
高度Height	42
额定参数Rated Parameters	
额定电压Rated Voltage [V]	500
额定电流Rated Current [A]	17.5
接线容量Wire Range	
[mm <sup>2</sup> ]	0.2-1.5
[AWG]	30-14
螺钉类型Screw Type [*]	M2
扭矩Torque [N.m]	0.2-0.24
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
剥线长度Strip length [mm]	7

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
4.2	42.5	42
额定参数Rated Parameters		
IEC	UL	
500	300	
17.5	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1.5
30-14	30-14	30-14
螺钉类型Screw Type [*]		
M2		
扭矩Torque [N.m]		
0.2-0.24		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length [mm]		
7		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.1	42.2	42
额定参数Rated Parameters		
IEC	UL	
800	300	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
30-12	30-12	30-12
螺钉类型Screw Type [*]		
M3		
扭矩Torque [N.m]		
0.6-0.8		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length [mm]		
7-8		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.1	42.2	46.8
额定参数Rated Parameters		
IEC	UL	
800	600	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
28-12	28-12	28-12
螺钉类型Screw Type [*]		
M3		
扭矩Torque [N.m]		
0.6-0.8		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length [mm]		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.1	42.2	46.8
额定参数Rated Parameters		
IEC	UL	
800	600	
32	30	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.25-4
30-10	30-10	30-10
螺钉类型Screw Type [*]		
M3		
扭矩Torque [N.m]		
0.6-0.8		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length [mm]		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.1	42.2	46.8
额定参数Rated Parameters		
IEC	UL	
800	600	
41	50	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-10	0.2-6	0.25-6
26-8	26-8	26-8
螺钉类型Screw Type [*]		
M4		
扭矩Torque [N.m]		
1.2-1.44		
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length [mm]		
10-11		

产品Product		颜色Colour
		灰Gray
		橙Orange
		蓝Blue
端板Cover Plate		颜色Colour
		灰Gray
		橙Orange
隔板Intermediate Plate		灰Gray
跨接件Jumper		
位数Poles No.		
2	*	
3	*	
4	*	
...	.....	
9	*	
10	*	
安全警告标记 Protective Warning Marker		
正面标记和侧面标记 Front And Side Marker		
可提供印字服务 Printing Service		





订货信息Order Information	
订货号Order NO.	301901
	301904
	301902
配套附件Accessory	
订货号Order NO.	302101
	302102
	*
跨接件Jumper	
订货号Order NO.	*
	302302
	302303
	302304
	.....
	302309
	302310
安全警告标记 Protective Warning Marker	
订货号Order NO.	*
正面标记和侧面标记 Front And Side Marker	
订货号Order NO.	*

订货信息Order Information	
订货号Order NO.	302901
	302904
	302902
配套附件Accessory	
订货号Order NO.	302101
	302102
	*
跨接件Jumper	
订货号Order NO.	*
	302302
	302303
	302304
	.....
	302309
	302310
安全警告标记 Protective Warning Marker	
订货号Order NO.	*
正面标记和侧面标记 Front And Side Marker	
订货号Order NO.	306801

订货信息Order Information	
订货号Order NO.	303901
	303904
	303902
配套附件Accessory	
订货号Order NO.	303101
	303102
	302151
跨接件Jumper	
订货号Order NO.	*
	303302
	303303
	303304
	.....
	303309
	303310
安全警告标记 Protective Warning Marker	
订货号Order NO.	*
正面标记和侧面标记 Front And Side Marker	
订货号Order NO.	305801

订货信息Order Information	
订货号Order NO.	305901
	305904
	305902
配套附件Accessory	
订货号Order NO.	303101
	303102
	302151
跨接件Jumper	
订货号Order NO.	*
	302302
	302303
	302304
	.....
	302309
	302310
安全警告标记 Protective Warning Marker	
订货号Order NO.	*
正面标记和侧面标记 Front And Side Marker	
订货号Order NO.	306801

订货信息Order Information	
订货号Order NO.	306901
	306904
	306902
配套附件Accessory	
订货号Order NO.	303101
	303102
	302151
跨接件Jumper	
订货号Order NO.	*
	306302
	306303
	306304
	.....
	306309
	306310
安全警告标记 Protective Warning Marker	
订货号Order NO.	306701
正面标记和侧面标记 Front And Side Marker	
订货号Order NO.	308801



10mm<sup>2</sup> UK接线端子  
UK Terminal Block

16mm<sup>2</sup> UK接线端子  
UK Terminal Block

35mm<sup>2</sup> UK接线端子  
UK Terminal Block

50mm<sup>2</sup> UK接线端子  
UK Terminal Block

70mm<sup>2</sup> UK接线端子  
UK Terminal Block

技术参数 Technical Parameter	
尺寸 Size	
注: 安装 NS35/7.5 导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数 Rated Parameters	
额定电压 Rated Voltage	[V]
额定电流 Rated Current	[A]
接线容量 Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型 Screw Type	[*]
扭矩 Torque	[N.m]
其余参数 Other Parameters	
绝缘材料/阻燃等级, 符合 UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度 Strip length	[mm]

技术参数 Technical Parameter		
厚度 Thickness	宽度 Width	高度 Height
10	42.2	46.8
IEC	UL	
800	600	
57	65	
刚性 Solid	柔性 Fine Stranded	带冷压头 Ferrule
0.5-16	0.5-10	0.5-6
24-6	24-6	24-6
M4		
1.2-1.44		
V0		
10-11		

技术参数 Technical Parameter		
厚度 Thickness	宽度 Width	高度 Height
12	42.2	53.7
IEC	UL	
800	600	
76	85	
刚性 Solid	柔性 Fine Stranded	带冷压头 Ferrule
2.5-25	4-16	1.5-16
22-4	22-4	22-4
M4		
1.2-1.5		
V0		
11-12		

技术参数 Technical Parameter		
厚度 Thickness	宽度 Width	高度 Height
15	50.3	62.3
	UL	
1000	600	
125	150	
刚性 Solid	柔性 Fine Stranded	带冷压头 Ferrule
0.75-50	0.75-35	0.75-35
18-1/0	18-1/0	18-1/0
M6		
3.0-3.5		
V0		
16-17		

技术参数 Technical Parameter		
厚度 Thickness	宽度 Width	高度 Height
20.4	70.7	76.1
IEC	UL	
1000	600	
150	150	
刚性 Solid	柔性 Fine Stranded	带冷压头 Ferrule
16-70	25-70	25-50
6-2/0	6-2/0	6-2/0
M6		
3.0		
V0		
24		

技术参数 Technical Parameter		
厚度 Thickness	宽度 Width	高度 Height
20.4	70.5	79.5
IEC	UL	
1000	600	
192	150	
刚性 Solid	柔性 Fine Stranded	带冷压头 Ferrule
16-70	16-70	25-70
22-6	22-6	22-6
M8		
8-10		
V0		
22		

订货信息 Order Information	
产品 Product	颜色 Colour
适配 NS 35/7.5 导轨 Can Be Used For DIN Rail NS 35/7.5	灰 Gray 橙 Orange 蓝 Blue
配套附件 Accessory	
端板 Cover Plate	颜色 Colour
端板 Cover Plate	灰 Gray 橙 Orange
隔板 Intermediate Plate	灰 Gray
跨接件 Jumper	
位数 Poles No.	
2	310302
3	310303
4	310304
...	.....
9	310309
10	310310
安全警告标记 Protective Warning Marker	
安全警告标记 Protective Warning Marker	
正面标记和侧面标记 Front And Side Marker	
正面标记和侧面标记 可提供印字服务 Printing Service	

订货信息 Order Information	
订货号 Order NO.	
310901	
310904	
310902	
配套附件 Accessory	
订货号 Order NO.	
303101	
303102	
302151	
跨接件 Jumper	
订货号 Order NO.	
310302	
310303	
310304	
.....	
310309	
310310	
安全警告标记 Protective Warning Marker	
订货号 Order NO.	
310701	
正面标记和侧面标记 Front And Side Marker	
订货号 Order NO.	
310801	

订货信息 Order Information	
订货号 Order NO.	
316901	
316904	
316902	
配套附件 Accessory	
订货号 Order NO.	
316101	
316102	
302151	
跨接件 Jumper	
订货号 Order NO.	
316302	
316303	
316304	
.....	
316309	
316310	
安全警告标记 Protective Warning Marker	
订货号 Order NO.	
316701	
正面标记和侧面标记 Front And Side Marker	
订货号 Order NO.	
312801	

订货信息 Order Information	
订货号 Order NO.	
335901	
335904	
335902	
配套附件 Accessory	
订货号 Order NO.	
*	
*	
302151	
跨接件 Jumper	
订货号 Order NO.	
335302	
335303	
335304	
.....	
335309	
335310	
安全警告标记 Protective Warning Marker	
订货号 Order NO.	
335701~335705	
正面标记和侧面标记 Front And Side Marker	
订货号 Order NO.	
315801	

订货信息 Order Information	
订货号 Order NO.	
350901	
*	
*	
配套附件 Accessory	
订货号 Order NO.	
*	
*	
*	
跨接件 Jumper	
订货号 Order NO.	
350302	
*	
*	
*	
.....	
*	
*	
安全警告标记 Protective Warning Marker	
订货号 Order NO.	
*	
正面标记和侧面标记 Front And Side Marker	
订货号 Order NO.	
316801	

订货信息 Order Information	
订货号 Order NO.	
370901	
配套附件 Accessory	
订货号 Order NO.	
*	
*	
*	
跨接件 Jumper	
订货号 Order NO.	
*	
*	
*	
.....	
*	
*	
安全警告标记 Protective Warning Marker	
订货号 Order NO.	
*	
正面标记和侧面标记 Front And Side Marker	
订货号 Order NO.	
316801	





95mm<sup>2</sup> UK接线端子  
UK Terminal Block

技术参数Technical Parameter


尺寸Size	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	25	82.9	89.9
<b>额定参数Rated Parameters</b>	IEC	UL	
额定电压Rated Voltage	1000	600	
额定电流Rated Current	232	230	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	25-95	25-95	25-95
	[mm <sup>2</sup> ]		
	2-4/0	2-4/0	2-4/0
	[AWG]		
螺钉类型Screw Type	M8		
扭矩Torque	15-18		
<b>其余参数Other Parameters</b>	V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			
剥线长度Strip length	33		

订货信息Order Information

产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	395901
	橙Orange	
	蓝Blue	

配套附件Accessory

端板Cover Plate	颜色Colour	订货号Order NO.
端板Cover Plate	灰Gray	*
	橙Orange	*
隔板Intermediate Plate	灰Gray	*
<b>跨接件Jumper</b>		
位数Poles No.		订货号Order NO.
2		*
3		*
4		*
...		.....
9		*
10		*
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.
		*
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.
可提供印字服务Printing Service		316801




2.5mm<sup>2</sup>, UK二进二出接线端子  
2-2 Feed Through Terminal Block

尺寸Size	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	5.2	58	45.9
<b>额定参数Rated Parameters</b>	IEC	UL	
额定电压Rated Voltage	500	300	
额定电流Rated Current	24	20	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-4	0.2-2.5	0.2-2.5
	[mm <sup>2</sup> ]		
	24-12	24-12	24-12
	[AWG]		
螺钉类型Screw Type	M3		
扭矩Torque	0.5-0.6		
<b>其余参数Other Parameters</b>	V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			
剥线长度Strip length	8-9		

产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	303941
	橙Orange	303944
	蓝Blue	303942

端板Cover Plate	颜色Colour	订货号Order NO.
端板Cover Plate	灰Gray	303141
	橙Orange	303142
隔板Intermediate Plate	灰Gray	*
<b>跨接件Jumper</b>		
位数Poles No.		订货号Order NO.
2		303302
3		303303
4		303304
...		.....
9		303309
10		303310
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.
		*
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.
可提供印字服务Printing Service		305801



4mm<sup>2</sup>, UK二进二出接线端子  
2-2 Feed Through Terminal Block









尺寸Size	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	6.2	58	45.9
<b>额定参数Rated Parameters</b>	IEC	UL	
额定电压Rated Voltage	630	600	
额定电流Rated Current	32	30	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-6	0.2-4	0.2-4
	[mm <sup>2</sup> ]		
	30-10	30-10	30-10
	[AWG]		
螺钉类型Screw Type	M3		
扭矩Torque	0.5-0.6		
<b>其余参数Other Parameters</b>	V0		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			
剥线长度Strip length	8-9		

订货信息Order Information

产品Product	颜色Colour	订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray	305941
	橙Orange	305944
	蓝Blue	305942

配套附件Accessory

端板Cover Plate	颜色Colour	订货号Order NO.
端板Cover Plate	灰Gray	303141
	橙Orange	303142
隔板Intermediate Plate	灰Gray	*
<b>跨接件Jumper</b>		
位数Poles No.		订货号Order NO.
2		302302
3		302303
4		302304
...		.....
9		302309
10		302310
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.
		*
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.
可提供印字服务Printing Service		306801



1.5mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

2.5mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

4mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

6mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

10mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.1	42.9	41.85
IEC		UL
*	*	
*	*	
刚性Solid		柔性Fine Stranded
0.2-4	0.2-2.5	0.25-2.5
30-12	30-12	30-12
带冷压头Furrule		
M3		
0.6-0.8		
V0		
7-8		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.1	42.9	47.25
IEC		UL
*	*	
*	*	
刚性Solid		柔性Fine Stranded
0.2-4	0.2-2.5	0.2-2.5
28-12	28-12	28-12
带冷压头Furrule		
M3		
0.6-0.8		
V0		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.1	42.9	47.2
IEC		UL
*	*	
*	*	
刚性Solid		柔性Fine Stranded
0.2-6	0.2-4	0.25-2.5
30-10	30-10	30-10
带冷压头Furrule		
M3		
0.6-0.8		
V0		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.1	42.9	47.2
IEC		UL
*	*	
*	*	
刚性Solid		柔性Fine Stranded
0.2-10	0.2-6	0.25-6
26-8	26-8	26-8
带冷压头Furrule		
M4		
1.2-1.44		
V0		
10-11		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10.2	42.8	47.2
IEC		UL
*	*	
*	*	
刚性Solid		柔性Fine Stranded
0.5-16	0.5-10	0.5-6
24-6	24-6	24-6
带冷压头Furrule		
M4		
1.2-1.44		
V0		
10-11		

产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*

订货信息Order Information	
订货号Order NO.	302903
	*
	*

订货信息Order Information	
订货号Order NO.	303903
	*
	*

订货信息Order Information	
订货号Order NO.	305903
	*
	*

订货信息Order Information	
订货号Order NO.	306903
	*
	*

订货信息Order Information	
订货号Order NO.	310903
	*
	*

配套附件Accessory	
端板Cover Plate	颜色Colour
端板Cover Plate	灰Gray
端板Cover Plate	橙Orange
隔板Intermediate Plate	灰Gray

配套附件Accessory	
订货号Order NO.	*
	*
	*
	302151

配套附件Accessory	
订货号Order NO.	*
	*
	302151

配套附件Accessory	
订货号Order NO.	*
	*
	302151

配套附件Accessory	
订货号Order NO.	*
	*
	302151

配套附件Accessory	
订货号Order NO.	*
	*
	302151

跨接件Jumper	
位数Poles No.	
2	*
3	*
4	*
...	.....
9	*
10	*

跨接件Jumper	
订货号Order NO.	*
	*
	*
	.....
	*
	*

跨接件Jumper	
订货号Order NO.	*
	*
	*
	.....
	*
	*

跨接件Jumper	
订货号Order NO.	*
	*
	*
	.....
	*
	*

跨接件Jumper	
订货号Order NO.	306701
	*
	*
	.....
	*
	*

跨接件Jumper	
订货号Order NO.	310701
	*
	*
	.....
	*
	*

安全警告标记 Protective Warning Marker	
订货号Order NO.	*






安全警告标记 Protective Warning Marker	
订货号Order NO.	306801

安全警告标记 Protective Warning Marker	
订货号Order NO.	305801

安全警告标记 Protective Warning Marker	
订货号Order NO.	306801

安全警告标记 Protective Warning Marker	
订货号Order NO.	308801

安全警告标记 Protective Warning Marker	
订货号Order NO.	310801

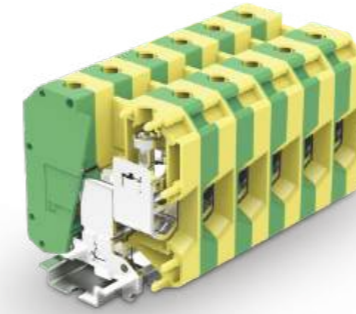

16mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

35mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

50mm<sup>2</sup> UK接地端子  
UK Ground Terminal Block

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12	43	54.3
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
2.5-25	4-16	1.5-16
22-4	22-4	22-4
M4		
1.2-1.5		
V0		
11-12		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
15	50.4	62.45
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.75-50	0.75-35	0.75-35
18-1/0	18-1/0	18-1/0
M6		
3.0-3.5		
V0		
15-16		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
20	70.7	76.2
IEC	UL	
*	*	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
16-70	25-70	25-50
6-2/0	6-2/0	6-2/0
M6		
3.0		
V0		

产品Product	
颜色Colour	黄绿Yellow green
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	*

订货信息Order Information	
订货号Order NO.	316903
	*
	*

订货信息Order Information	
订货号Order NO.	335903
	*
	*

订货信息Order Information	
订货号Order NO.	350903
	*
	*

盖板Cover Plate	
颜色Colour	灰Gray
盖板Cover Plate	橙Orange
隔板Intermediate Plate	灰Gray

配套附件Accessory	
订货号Order NO.	*
	*
302151	302151

配套附件Accessory	
订货号Order NO.	*
	*
302151	302151

配套附件Accessory	
订货号Order NO.	*
	*
	*

跨接件Jumper	
位数Poles No.	
2	*
3	*
4	*
...	.....
9	*
10	*

跨接件Jumper	
位数Poles No.	
2	*
3	*
4	*
...	.....
9	*
10	*

跨接件Jumper	
位数Poles No.	
2	*
3	*
4	*
...	.....
9	*
10	*


跨接件Jumper	
位数Poles No.	
2	*
3	*
4	*
...	.....
9	*
10	*

安全警告标记 Protective Warning Marker	
正面标记和侧面标记Front And Side Marker 可提供印字服务Printing Service	



订货号Order NO.	316701
订货号Order NO.	312801

订货号Order NO.	315801
订货号Order NO.	315801

订货号Order NO.	316801
订货号Order NO.	316801



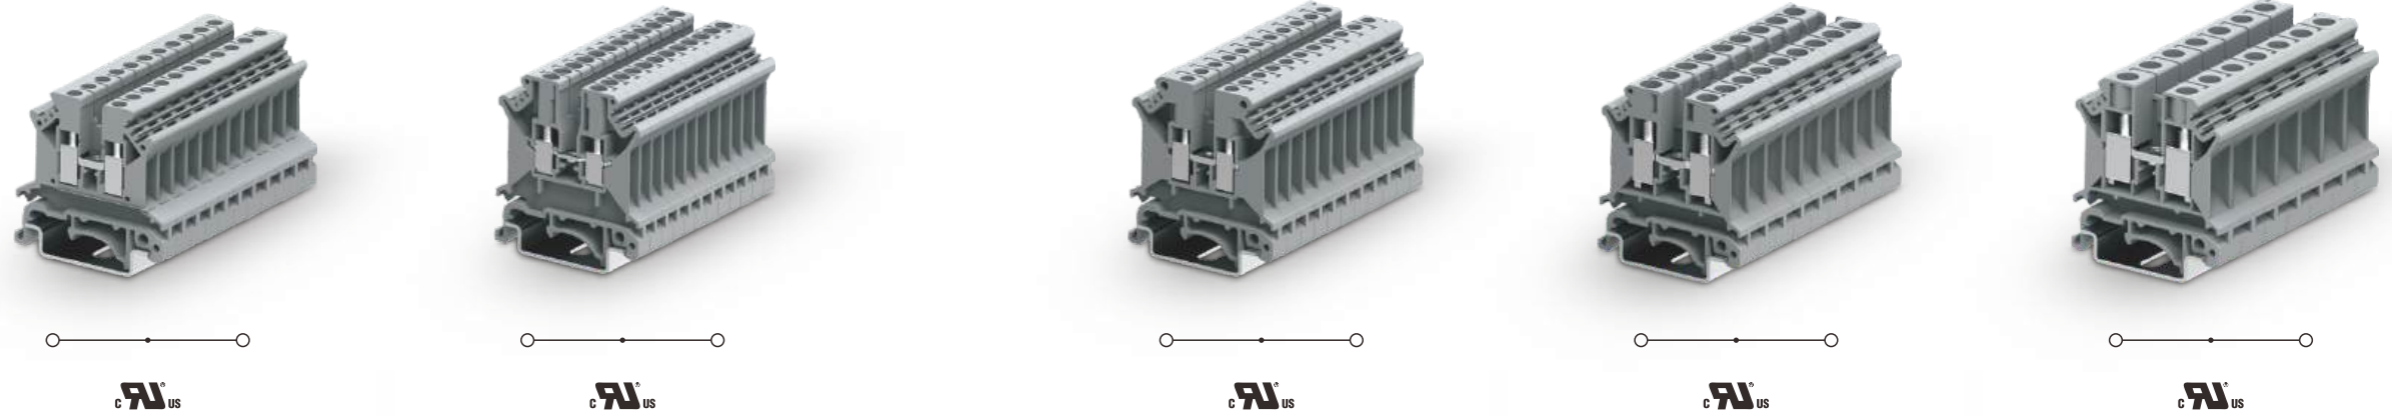


	2.5mm <sup>2</sup> SUK接线端子 SUK Terminal Block	2.5mm <sup>2</sup> SUK接线端子 SUK Terminal Block	4mm <sup>2</sup> SUK接线端子 SUK Terminal Block	6mm <sup>2</sup> SUK接线端子 SUK Terminal Block	10mm <sup>2</sup> SUK接线端子 SUK Terminal Block										
<b>技术参数Technical Parameter</b>															
<b>尺寸Size</b>	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height			
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	6.1	42.2	42	5.1	42.2	46.8	6	42.2	46.8	8.1	42.2	46.8	10	42.2	46.8
<b>额定参数Rated Parameters</b>															
额定电压Rated Voltage	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage	800	300		800	600		800	600		800	600		800	600	
额定电流Rated Current	24	20		24	20		32	30		41	50		57	65	
<b>接线容量Wire Range</b>															
	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	0.2-4	0.2-2.5	0.25-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-6	0.2-4	0.25-4	0.2-10	0.2-6	0.25-6	1.5-16	1.5-10	1.5-6
	30-12	30-12	30-12	28-12	28-12	28-12	30-10	30-10	30-10	26-8	26-8	26-8	16-6	16-6	16-6
螺钉类型Screw Type	M3			M3			M3			M4			M4		
扭矩Torque	0.6-0.8			0.6-0.8			0.6-0.8			1.2-1.5			1.2-1.5		
<b>其余参数Other Parameters</b>															
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length	8-9			8-9			8-9			10-11			10-11		
<b>订货信息Order Information</b>															
<b>产品Product</b>	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray		302991	灰Gray		303991	灰Gray		305991	灰Gray		306991	灰Gray		310991
	橙Orange		302994	橙Orange		303994	橙Orange		305994	橙Orange		306994	橙Orange		310994
	蓝Blue		302992	蓝Blue		303992	蓝Blue		305992	蓝Blue		306992	蓝Blue		310992
<b>配套附件Accessory</b>															
<b>端板Cover Plate</b>	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.	颜色Colour		订货号Order NO.
端板Cover Plate	灰Gray		302101	灰Gray		303101	灰Gray		303101	灰Gray		303101	灰Gray		303101
	橙Orange		302102	橙Orange		303102	橙Orange		303102	橙Orange		303102	橙Orange		303102
隔板Intermediate Plate	灰Gray		*	灰Gray		302151	灰Gray		302151	灰Gray		302151	灰Gray		302151
<b>跨接件Jumper</b>															
位数Poles No.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.
2			302302			303302			302302			306302			310302
3			302303			303303			302303			306303			310303
4			302304			303304			302304			306304			310304
...			.....			.....			.....			.....			.....
9			302309			303309			302309			306309			310309
10			302310			303310			302310			306310			310310
<b>安全警告标记 Protective Warning Marker</b>															
安全警告标记 Protective Warning Marker			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.
			*			*			*			306701			310701
<b>正面标记和侧面标记Front And Side Marker</b>															
正面标记和侧面标记 可提供印字服务Printing Service			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.
			306801			305801			306801			308801			310801




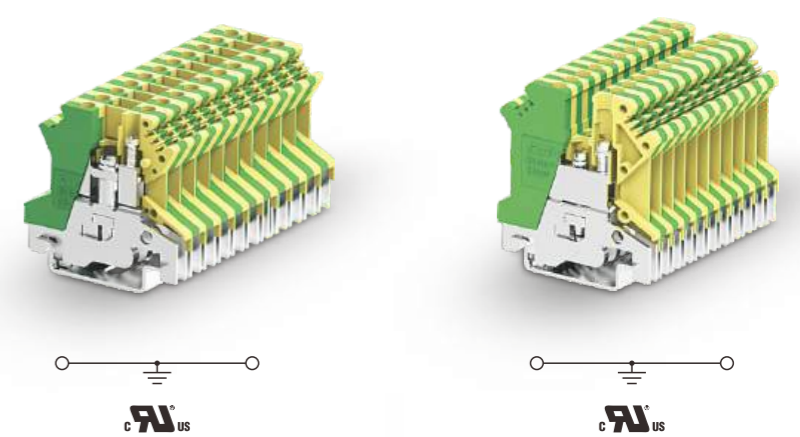
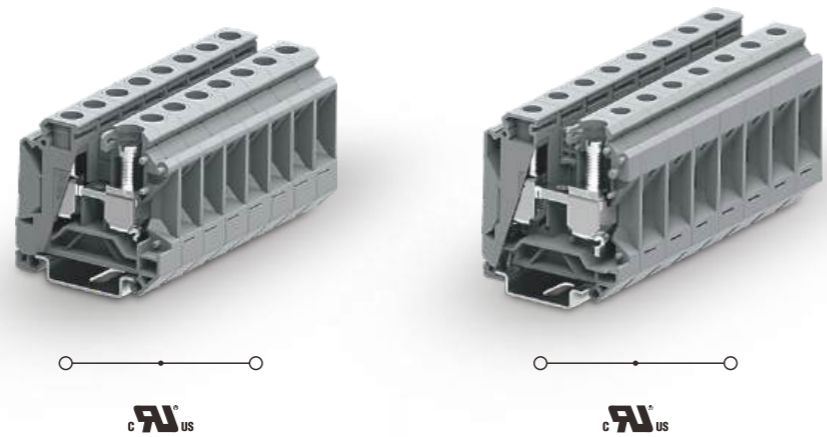


16mm <sup>2</sup> SUK接线端子 SUK Terminal Block		35mm <sup>2</sup> SUK接线端子 SUK Terminal Block	
技术参数Technical Parameter		技术参数Technical Parameter	
尺寸Size	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5 [mm]	12.2 50.5 50.8	16 53.5 62.5	
<b>额定参数Rated Parameters</b>	IEC UL	IEC UL	
额定电压Rated Voltage [V]	800 600	1000 600	
额定电流Rated Current [A]	76 85	125 150	
<b>接线容量Wire Range</b>	刚性Solid 柔性Fine Stranded 带冷压头Ferrule	刚性Solid 柔性Fine Stranded 带冷压头Ferrule	
[mm <sup>2</sup> ]	6-16 6-16 6-16	10-35 10-35 10-35	
[AWG]	10-4 10-4 10-4	8-1/0 8-1/0 8-1/0	
螺钉类型Screw Type [*]	M5	M6	
扭矩Torque [N.m]	2.0-2.5	3.0-3.5	
<b>其余参数Other Parameters</b>			
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	
剥线长度Strip length [mm]	12-13	16-17	
<b>产品Product</b>	<b>颜色Colour</b>	<b>订货号Order NO.</b>	<b>订货号Order NO.</b>
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray 橙Orange 蓝Blue	316991 316994 316992	335991 335994 335992
<b>端板Cover Plate</b>	<b>颜色Colour</b>	<b>订货号Order NO.</b>	<b>订货号Order NO.</b>
端板Cover Plate	灰Gray 橙Orange	*	*
隔板Intermediate Plate	灰Gray	302151	302151
<b>跨接件Jumper</b>			
位数Poles No.		订货号Order NO.	订货号Order NO.
2		316302	335302
3		316303	*
4		316304	*
...		.....	*
9		316309	*
10		316310	*
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.	订货号Order NO.
		316701	*
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		312801	316801

2.5mm <sup>2</sup> SUK接地端子 SUK Ground Terminal Block		2.5mm <sup>2</sup> SUK接地端子 SUK Ground Terminal Block	
技术参数Technical Parameter		技术参数Technical Parameter	
尺寸Size	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height	厚度Thickness 宽度Width 高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5 [mm]	6.1 42.9 41.85	5.1 42.9 47.25	
<b>额定参数Rated Parameters</b>	IEC UL	IEC UL	
额定电压Rated Voltage [V]	* *	* *	
额定电流Rated Current [A]	* *	* *	
<b>接线容量Wire Range</b>	刚性Solid 柔性Fine Stranded 带冷压头Ferrule	刚性Solid 柔性Fine Stranded 带冷压头Ferrule	
[mm <sup>2</sup> ]	0.2-4 0.2-2.5 0.25-2.5	0.2-4 0.2-2.5 0.25-2.5	
[AWG]	30-12 30-12 30-12	28-12 28-12 28-12	
螺钉类型Screw Type [*]	M3	M3	
扭矩Torque [N.m]	0.6-0.8	0.6-0.8	
<b>其余参数Other Parameters</b>			
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	
剥线长度Strip length [mm]	7-8	8-9	
<b>产品Product</b>	<b>颜色Colour</b>	<b>订货号Order NO.</b>	<b>订货号Order NO.</b>
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green * *	302993 * *	303993 * *
<b>端板Cover Plate</b>	<b>颜色Colour</b>	<b>订货号Order NO.</b>	<b>订货号Order NO.</b>
端板Cover Plate	灰Gray 橙Orange	*	*
隔板Intermediate Plate	灰Gray	*	302151
<b>跨接件Jumper</b>			
位数Poles No.		订货号Order NO.	订货号Order NO.
2		*	*
3		*	*
4		*	*
...		.....	.....
9		*	*
10		*	*
<b>安全警告标记 Protective Warning Marker</b>		订货号Order NO.	订货号Order NO.
		*	*
<b>正面标记和侧面标记Front And Side Marker</b>		订货号Order NO.	订货号Order NO.
可提供印字服务Printing Service		310801	310801

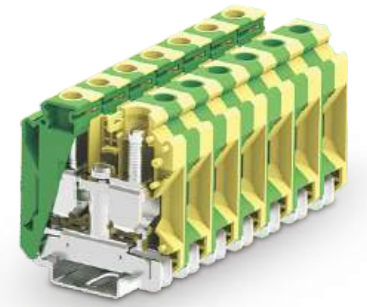

	4mm <sup>2</sup> SUK接地端子 SUK Ground Terminal Block			6mm <sup>2</sup> SUK接地端子 SUK Ground Terminal Block			10mm <sup>2</sup> SUK接地端子 SUK Ground Terminal Block			16mm <sup>2</sup> SUK接地端子 SUK Ground Terminal Block			35mm <sup>2</sup> SUK接地端子 SUK Ground Terminal Block		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	6.1	42.9	47.2	8.1	42.9	47.2	10.2	42.8	47.2	12.2	50.5	50.3	16	53.2	62.2
<b>额定参数Rated Parameters</b>	IEC	UL		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]	*	*		*	*		*	*		*	*		*	*	
额定电流Rated Current [A]	*	*		*	*		*	*		*	*		*	*	
<b>接线容量Wire Range</b>	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]	0.2-6	0.2-4	0.25-2.5	0.2-10	0.2-6	0.25-6	0.2-16	0.2-10	0.5-6	0.2-25	0.2-16	0.5-16	0.5-35	0.5-35	0.75-35
[AWG]	30-10	30-10	30-10	26-8	26-8	26-8	16-6	16-6	16-6	10-4	10-4	10-4	8-1/0	8-1/0	18-1/0
螺钉类型Screw Type [*]	M3			M4			M4			M5			M6		
扭矩Torque [N.m]	0.6-0.8			1.2-1.5			1.2-1.5			2.0-2.5			3.0-3.5		
<b>其余参数Other Parameters</b>															
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0			V0			V0			V0			V0		
剥线长度Strip length [mm]	8-9			10-11			10-11			12-13			16-17		
<b>产品Product</b>	颜色Colour			颜色Colour			颜色Colour			颜色Colour			颜色Colour		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green			黄绿Yellow green			黄绿Yellow green			黄绿Yellow green			黄绿Yellow green		
	*			*			*			*			*		
	*			*			*			*			*		
<b>配套附件Accessory</b>	配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory			配套附件Accessory		
端板Cover Plate	颜色Colour			颜色Colour			颜色Colour			颜色Colour			颜色Colour		
端板Cover Plate	灰Gray			灰Gray			灰Gray			灰Gray			灰Gray		
端板Cover Plate	橙Orange			橙Orange			橙Orange			橙Orange			橙Orange		
隔板Intermediate Plate	灰Gray			灰Gray			灰Gray			灰Gray			灰Gray		
跨接件Jumper	跨接件Jumper			跨接件Jumper			跨接件Jumper			跨接件Jumper			跨接件Jumper		
位数Poles No.	位数Poles No.			位数Poles No.			位数Poles No.			位数Poles No.			位数Poles No.		
2	*			*			*			*			*		
3	*			*			*			*			*		
4	*			*			*			*			*		
...	.....			.....			.....			.....			.....		
9	*			*			*			*			*		
10	*			*			*			*			*		
<b>安全警告标记 Protective Warning Marker</b>	安全警告标记			安全警告标记			安全警告标记			安全警告标记			安全警告标记		
	安全警告标记			安全警告标记			安全警告标记			安全警告标记			安全警告标记		
	*			306701			310701			316701			*		
<b>正面标记和侧面标记 Front And Side Marker</b>	正面标记和侧面标记			正面标记和侧面标记			正面标记和侧面标记			正面标记和侧面标记			正面标记和侧面标记		
可提供印字服务Printing Service	可提供印字服务			可提供印字服务			可提供印字服务			可提供印字服务			可提供印字服务		
	306801			308801			310801			312801			316801		

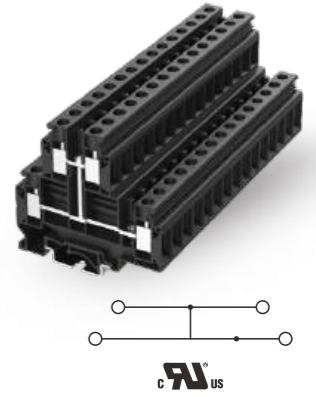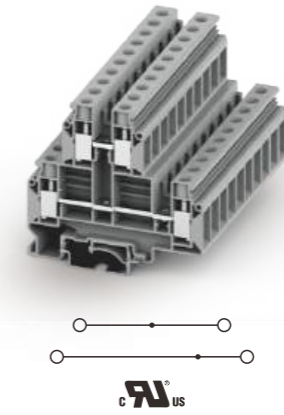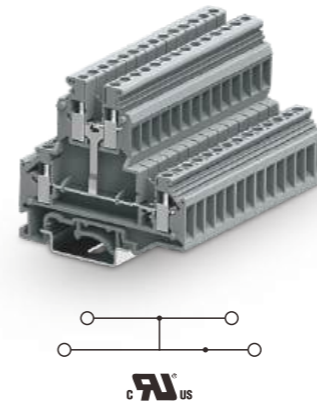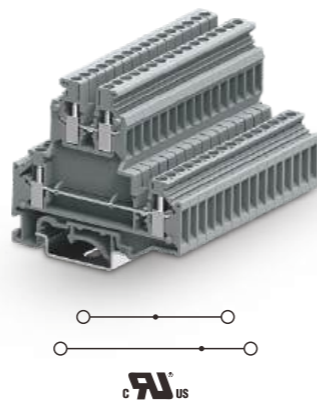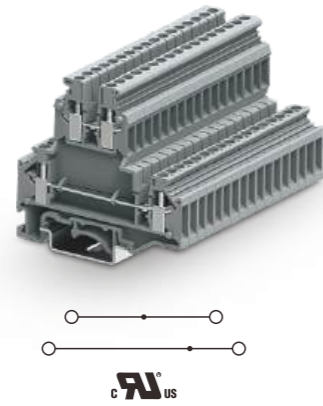

尺寸Size	
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

2.5mm <sup>2</sup> UKD接线端子 UKD Double Lever Terminal Block			
技术参数Technical Parameter			
厚度Thickness	宽度Width	高度Height	
5.2	67.2	62.2	
IEC	UL		
500	600		
24	20		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.2-4	0.2-2.5	0.2-2.5	
28-12	28-12	28-12	
M3			
0.6-0.8			
V0			
8-9			

4mm <sup>2</sup> UKD接线端子 UKD Double Level Terminal Block			
技术参数Technical Parameter			
厚度Thickness	宽度Width	高度Height	
6.2	67.2	62.2	
IEC	UL		
500	600		
32	30		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.2-4	0.2-4	0.25-4	
26-10	26-10	26-10	
M3			
0.6-0.8			
V0			
8-9			

4mm <sup>2</sup> UKD上下导通接线端子 UKD Double Level with Equipotential Bonding Terminal Block			
技术参数Technical Parameter			
厚度Thickness	宽度Width	高度Height	
6.2	67.2	62.2	
IEC	UL		
500	600		
32	30		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.2-4	0.2-4	0.25-4	
26-10	26-10	26-10	
M3			
0.6-0.8			
V0			
8-9			

10mm <sup>2</sup> UKD接线端子 UKD Double Level Terminal Block			
技术参数Technical Parameter			
厚度Thickness	宽度Width	高度Height	
10.2	77.5	73	
IEC	UL		
500	600		
57	65		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.5-10	0.5-10	0.5-10	
24-6	24-6	24-6	
M4			
1.2-1.5			
V0			
11-12			

10mm <sup>2</sup> UKD上下导通接线端子 UKD Double Level with Equipotential Bonding Terminal Block			
技术参数Technical Parameter			
厚度Thickness	宽度Width	高度Height	
10.2	77.5	73	
IEC	UL		
500	600		
57	65		
刚性Solid	柔性Fine Stranded	带冷压头Furrule	
0.5-10	0.5-10	0.5-10	
24-6	24-6	24-6	
M4			
1.2-1.5			
V0			
11-12			

产品Product	
颜色Colour	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray 蓝Blue

订货信息Order Information	
订货号Order NO.	
303921	
303922	

订货信息Order Information	
订货号Order NO.	
305921	
305922	

订货信息Order Information	
订货号Order NO.	
305921-PV	
*	

订货信息Order Information	
订货号Order NO.	
310921	
*	

订货信息Order Information	
订货号Order NO.	
310921-PV	
*	

配套附件Accessory	
端板Cover Plate	颜色Colour
端板Cover Plate	灰Gray 橙Orange
隔板Intermediate Plate	灰Gray
补偿盖板 Compensatory Cover Plate	灰Gray

配套附件Accessory	
订货号Order NO.	
303121	
*	
*	
305121	

配套附件Accessory	
订货号Order NO.	
303121	
*	
*	
305121	

配套附件Accessory	
订货号Order NO.	
303121	
*	
302151	
*	

配套附件Accessory	
订货号Order NO.	
310121	
*	
*	

配套附件Accessory	
订货号Order NO.	
310121	
*	
*	

跨接件Jumper	
位数Poles No.	
2	
3	
4	
...	
9	
10	

跨接件Jumper	
订货号Order NO.	
303302	
303303	
303304	
.....	
303309	
303310	

跨接件Jumper	
订货号Order NO.	
302302	
302303	
302304	
.....	
302309	
302310	

跨接件Jumper	
订货号Order NO.	
302302	
302303	
302304	
.....	
302309	
302310	

跨接件Jumper	
订货号Order NO.	
310302	
310303	
310304	
.....	
310309	
310310	

跨接件Jumper	
订货号Order NO.	
310302	
310303	
310304	
.....	
310309	
310310	

安全警告标记 Protective Warning Marker	
订货号Order NO.	
*	
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	
305801	
可提供印字服务Printing Service	



安全警告标记 Protective Warning Marker	
订货号Order NO.	
*	
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	
305801	

安全警告标记 Protective Warning Marker	
订货号Order NO.	
*	
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	
306801	

安全警告标记 Protective Warning Marker	
订货号Order NO.	
*	
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	
306801	

安全警告标记 Protective Warning Marker	
订货号Order NO.	
*	
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	
310801	

安全警告标记 Protective Warning Marker	
订货号Order NO.	
*	
正面标记和侧面标记Front And Side Marker	
订货号Order NO.	
310801	

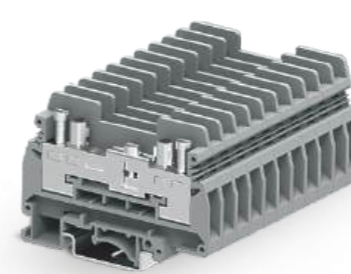

不提供保险管，图片仅供参考使用  
No fuse is provided. The picture is for reference only

尺寸Size	
注：安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
螺钉类型Screw Type	[*]
扭矩Torque	[N.m]
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]
产品Product	
颜色Colour	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray 蓝Blue
端板Cover Plate	
颜色Colour	
端板Cover Plate	灰Gray 橙Orange
隔板Intermediate Plate	灰Gray
补偿盖板 Compensatory Cover Plate	灰Gray
跨接件Jumper	
位数Poles No.	
2	
3	
4	
...	
9	
10	
安全警告标记 Protective Warning Marker	
正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

6mm <sup>2</sup> 普通分断测试连接器 General test terminal block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.2	72.4	50.6
IEC	UL	
630	300	
41	50	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-6
26-8	26-8	26-8
M4		
1.2-1.6		
V0		
13-14		
订货信息Order Information		
订货号Order NO.		
SUK6-T-GY		
*		
配套附件Accessory		
订货号Order NO.		
306101		
*		
306151		
*		
跨接件Jumper		
订货号Order NO.		
*		
308801		

6mm <sup>2</sup> 带导电柱分断测试连接器 Test terminal block with conductive column		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.2	72.4	50.6
IEC	UL	
630	300	
41	50	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-6
26-8	26-8	26-8
M4		
1.2-1.6		
V0		
13-14		
订货信息Order Information		
订货号Order NO.		
SUK6-T-JP-GY		
*		
配套附件Accessory		
订货号Order NO.		
306101		
*		
306151		
*		
跨接件Jumper		
订货号Order NO.		
SB8.2-2		
SB8.2-10		
安全警告标记		
订货号Order NO.		
*		
308801		

6mm <sup>2</sup> URTK/S分断测试端子 URTK/S General Test Terminal Block		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8.2	72.4	51.7
IEC	UL	
400	300	
41	50	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.5-10	0.5-6	0.5-4
26-8	26-8	26-8
M4		
1.2-1.5		
V0		
13-14		
订货信息Order Information		
订货号Order NO.		
306911		
*		
配套附件Accessory		
订货号Order NO.		
306101		
*		
306151		
*		
跨接件Jumper		
订货号Order NO.		
306322		
306320		
安全警告标记		
订货号Order NO.		
*		
308801		

4mm <sup>2</sup> UK5/HESI(带保险管) UK5/HESI Terminal Block With Fuse		
技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
8	72.6	50.4
IEC	UL	
500	600	
6.3	12	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.25-4
26-10	26-10	26-10
M3		
0.6-0.8		
V0		
8-9		
订货信息Order Information		
订货号Order NO.		
灰Gray 305972		
黑Black 305971		
配套附件Accessory		
订货号Order NO.		
*		
*		
*		
*		
跨接件Jumper		
订货号Order NO.		
*		
*		
*		
.....		
*		
*		
安全警告标记		
订货号Order NO.		
*		
308801		





## TB系列微型弹簧接线端子

### TB Rail-mounted Terminal Blocks With Spring-cage Clamp


TB系列微型弹簧接线端子采用笼式弹簧接线技术，产品精巧，拼装灵活。能够满足客户更加苛刻的使用空间要求。提供了螺钉固定、销钉固定、小导轨卡接固定、大导轨卡接固定和组合固定等多种固定方式，便于客户将产品固定在各种各样的使用空间中。产品设计制造符合IEC/EN60947、UL1059等国际标准，并通过TUV、CE、CQC、UL、CB认证。

TB series rail-mounted spring cage clamp terminal blocks use spring cage connection technology. The product is compact and can be flexible assembled. Can meet customer requirement for the space saving, fixing ways can be with screws, with snap-in mounting feet, on small Din rail, on big Din rail or certain combination ways. Product design and manufacturing is in line with the international standard IEC60947, UL1059, UL486E. and have the certificates CQC, UL, VDE, CE, ROHS etc.

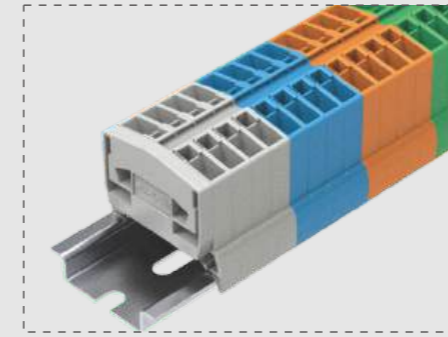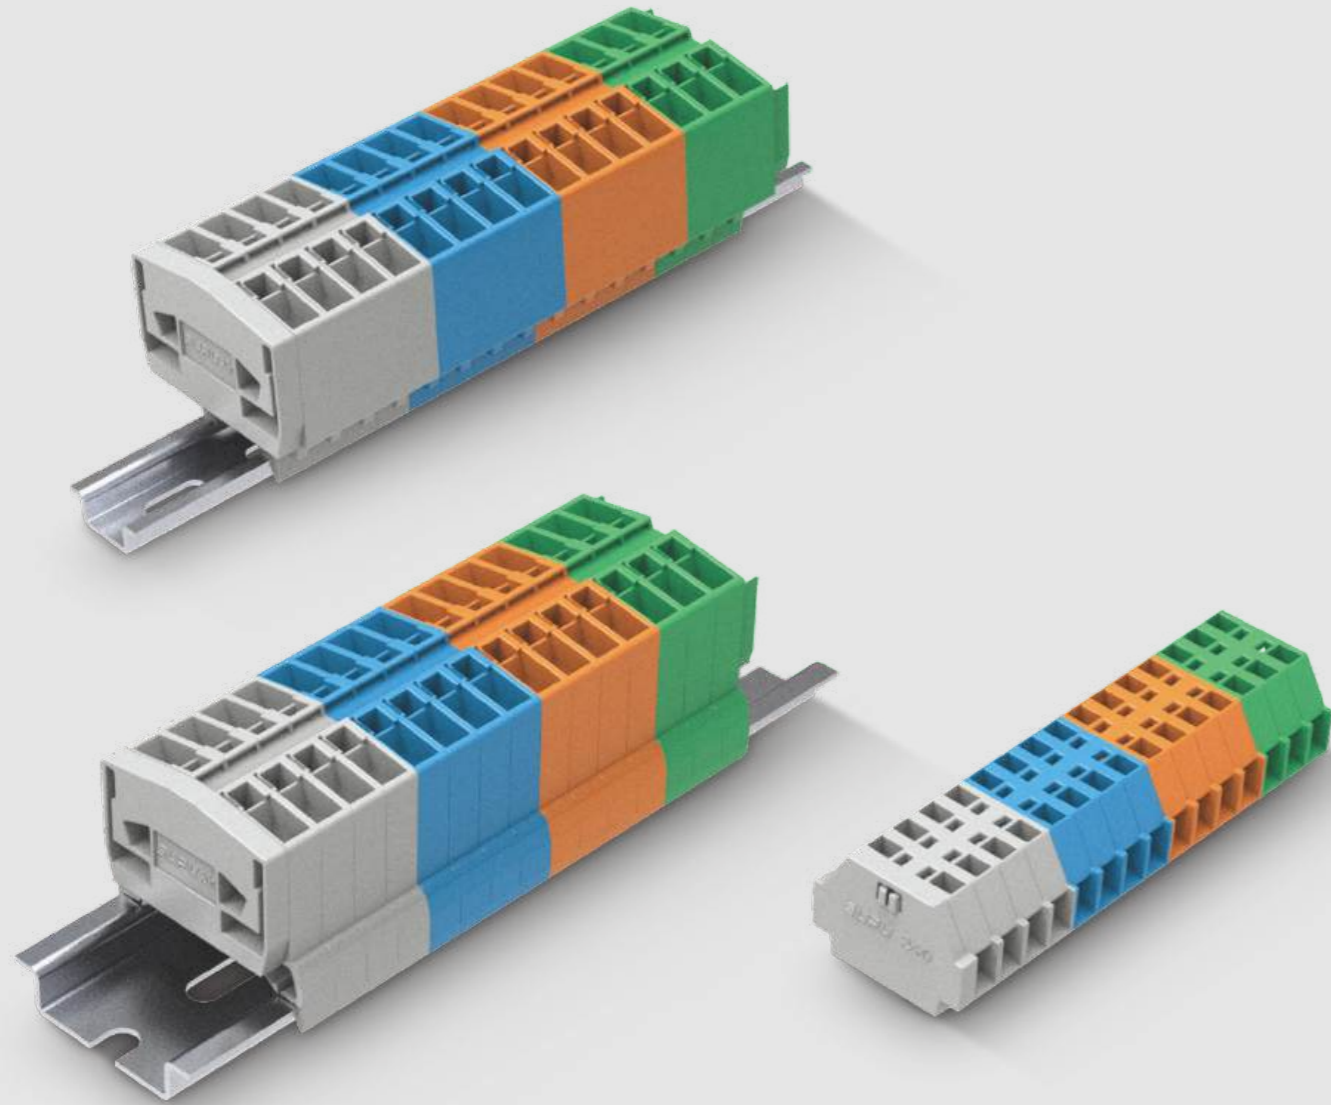


#### 小型化 Miniaturization

- ▲ 小型的体积满足客户的特殊需求，可适用于小型电机和小电源的接线、布线
- ▲ The compacted space can reach customers' special demand, especially used for mini motor, low current wire connections.

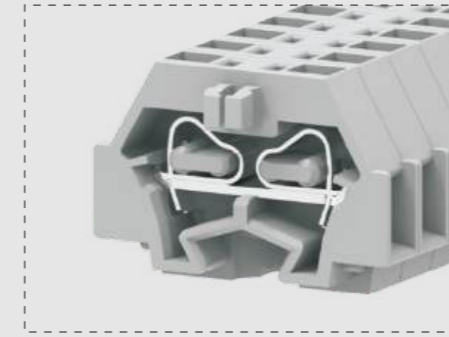


#### 连接方式 Connection Method

- ▲ 通过榫头接合相互卡接形成端子条
- ▲ By section and slot, the terminal blocks can be formed into decked.

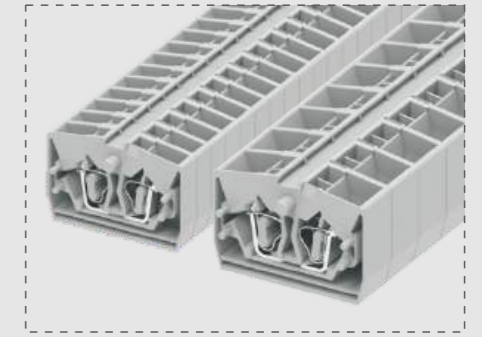


#### 接线 Wiring

- ▲ 具有一进一出和两进两出两种接线方式
- ▲ 1-1 or 2-2 feed through connection option.

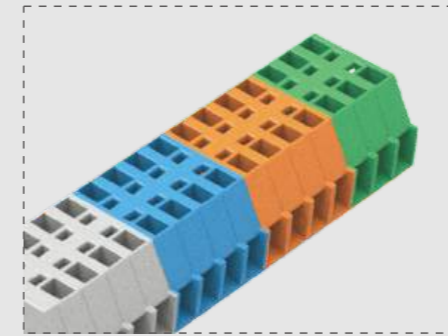

#### 颜色 Color

- ▲ 具有多种颜色可供选择，满足多样化的线路布线
- ▲ Different colors are optional for customers' special requirements.

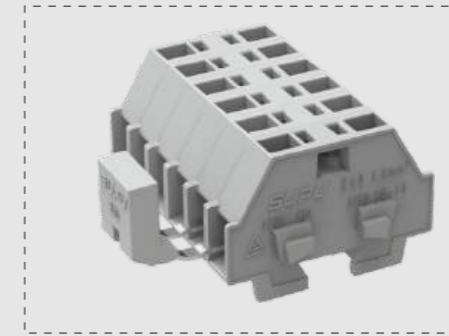

#### 跨接系统 Jumper System

- ▲ 相邻跨接桥可桥接相邻的端子
- ▲ Jumper can get the adjacent terminal blocks connected.




#### 导轨 DIN Rail

- ▲ 拥有两种规格卡脚，可安装至TS15或TS35两种导轨上
- ▲ 2 kinds of fixing feet where can connect to the TS15 or TS35 din rail.



#### 按键 Press Button

- ▲ 按键可以直接方便导线的安装
- ▲ It's easy to connect the wires by press buttons.

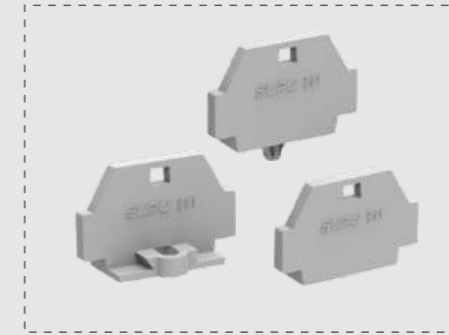


#### 端板 End cover

- ▲ 具有带固定器、带销钉多种固定方式的端板
- ▲ The plate can have fixing flanges or snap-in mounting feet.





#### 固定支架 Fixed Support


- ▲ 可将端子通过固定支架安装到导轨上
- ▲ The terminal blocks can be assembled to din rails through fixed support.





240系列一进一出带固定器侧面接线端子  
240 Series 1-1 Feed Through Terminal Block With Fixing Flanges of Side-entry



240系列两进两出带固定器侧面接线端子  
240 Series 2-2 Feed Through Terminal Block With Fixing Flanges of Side-entry



240系列一进一出带销钉侧面接线端子  
240 Series 1-1 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry





240系列两进两出带销钉侧面接线端子  
240 Series 2-2 Feed Through Terminal Block With Snap-in Mounting Feet of Side-entry




240系列一进一出侧面接线终端用端子  
240 Series 1-1 Feed Through End Terminal Block With Snap-in Mounting Feet of Side-entry

		技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
[mm]		8	25.1	17.2	8	25.1	17.2	5	25.1	17.2	8	25.1	17.2
<b>额定参数Rated Parameters</b>		IEC	UL		IEC	UL		IEC	UL		IEC	UL	
额定电压Rated Voltage [V]		400	300		400	300		400	300		400	300	
额定电流Rated Current [A]		18	10		18	10		18	10		18	10	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1
[AWG]		28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16	28-16
<b>其余参数Other Parameters</b>		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0		
剥线长度Strip length [mm]		8-9			8-9			8-9			8-9		
<b>产品Product</b>		<b>颜色Colour</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>			<b>订货信息Order Information</b>		
适配NS 35/7.5号轨 Can Be Used For DIN Rail NS 35/7.5		灰Gray			订货号Order NO.			订货号Order NO.			订货号Order NO.		
		橙Orange			240301			240331			240311		
		白灰Light gray			240302			240332			240312		
		蓝Blue			240303			240333			240313		
		黄Yellow			240304			240334			240314		
		绿Green			240305			240335			240315		
		黄绿Yellow green			240306			240336			240316		
		粉Pink			240307			240337			240317		
<b>端板Cover Plate</b>		灰Gray			订货号Order NO.			订货号Order NO.			订货号Order NO.		
平板Plate		橙Orange			*			*			240641		
带固定器With Fixing Flanges		灰Gray			240621			240621			240642		
带销钉With Snap-in Mounting Feet		橙Orange			240622			240622			*		
按键Press Button		灰Gray			*			*			*		
固定支架Fixed Support		白White			*			*			240631		
<b>跨接件Jumper</b>		灰Gray			241019			241019			240632		
位数Poles No.		灰Gray			241019			241019			*		
2		灰Gray			240601			240601			241019		
		灰Gray			240601			240601			订货号Order NO.		

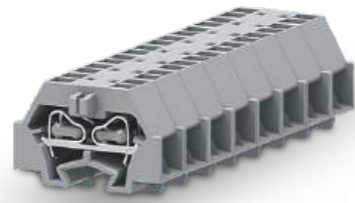



240系列两进两出侧面接线终端用端子  
240 Series 2-2 Feed Through End Terminal Block  
With Snap-in Mounting Feet of Side-entry

尺寸Size		技术参数Technical Parameter		
厚度Thickness	[mm]	8	25.1	17.2
<b>额定参数Rated Parameters</b>		IEC	UL	
额定电压Rated Voltage	[V]	400	300	
额定电流Rated Current	[A]	18	10	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-1.5	0.2-1.5	0.2-1
	[AWG]	28-16	28-16	28-16
<b>其余参数Other Parameters</b>		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	[mm]	8-9		
产品Product		订货信息Order Information		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	颜色Colour	订货号Order NO.		
	灰Gray	240351		
	橙Orange	240352		
	白灰Light gray	240353		
	蓝Blue	240354		
	黄Yellow	240355		
	绿Green	240356		
	黄绿Yellow green	240357		
粉Pink	240359			
端板Cover Plate		配套附件Accessory		
平板Plate	灰Gray	订货号Order NO.		
	橙Orange	240641		
带固定器With Fixing Flanges	灰Gray	240642		
	橙Orange	*		
带销钉With Snap-in Mounting Feet	灰Gray	240631		
	橙Orange	240632		
按键Press Button	白White	*		
固定支架Fixed Support	灰Gray	241019		
跨接件Jumper		配套附件Accessory		
位数Poles No.	颜色Colour	订货号Order NO.		
2	灰Gray	240601		

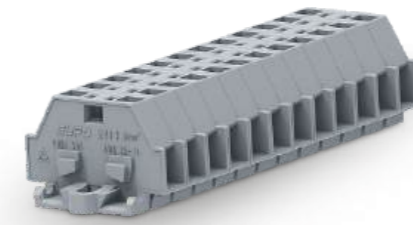





241系列一进一出带固定器侧面接线端子  
241 Series 1-1 Feed Through Terminal Block  
With Fixing Flanges of Side-entry

尺寸Size		技术参数Technical Parameter		
厚度Thickness	[mm]	6	28.1	18
<b>额定参数Rated Parameters</b>		IEC	UL	
额定电压Rated Voltage	[V]	500	300	
额定电流Rated Current	[A]	24	15	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
<b>其余参数Other Parameters</b>		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	[mm]	8-9		
产品Product		订货信息Order Information		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	颜色Colour	订货号Order NO.		
	灰Gray	241301		
	橙Orange	241302		
	白灰Light gray	241303		
	蓝Blue	241304		
	黄Yellow	241305		
	绿Green	241306		
	黄绿Yellow green	241307		
粉Pink	241309			
端板Cover Plate		配套附件Accessory		
平板Plate	灰Gray	订货号Order NO.		
	橙Orange	*		
带固定器With Fixing Flanges	灰Gray	241621		
	橙Orange	241622		
带销钉With Snap-in Mounting Feet	灰Gray	*		
	橙Orange	*		
按键Press Button	白White	241221		
固定支架Fixed Support	灰Gray	241019		
跨接件Jumper		配套附件Accessory		
位数Poles No.	颜色Colour	订货号Order NO.		
2	灰Gray	241601		

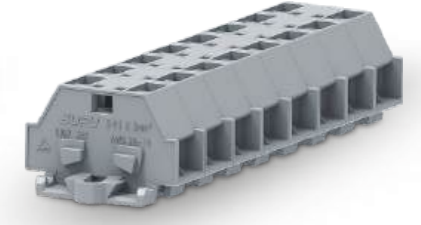

241系列两进两出带固定器侧面接线端子  
241 Series 2-2 Feed Through Terminal Block  
With Fixing Flanges of Side-entry

尺寸Size		技术参数Technical Parameter		
厚度Thickness	[mm]	10	28.1	18
<b>额定参数Rated Parameters</b>		IEC	UL	
额定电压Rated Voltage	[V]	500	300	
额定电流Rated Current	[A]	24	15	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-14	28-14	28-14
<b>其余参数Other Parameters</b>		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
剥线长度Strip length	[mm]	8-9		
产品Product		订货信息Order Information		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	颜色Colour	订货号Order NO.		
	灰Gray	241331		
	橙Orange	241332		
	白灰Light gray	241333		
	蓝Blue	241334		
	黄Yellow	241335		
	绿Green	241336		
	黄绿Yellow green	241337		
粉Pink	241339			
端板Cover Plate		配套附件Accessory		
平板Plate	灰Gray	订货号Order NO.		
	橙Orange	*		
带固定器With Fixing Flanges	灰Gray	241621		
	橙Orange	241622		
带销钉With Snap-in Mounting Feet	灰Gray	*		
	橙Orange	*		
按键Press Button	白White	241221		
固定支架Fixed Support	灰Gray	241019		
跨接件Jumper		配套附件Accessory		
位数Poles No.	颜色Colour	订货号Order NO.		
2	灰Gray	241601		

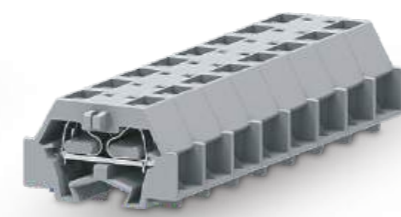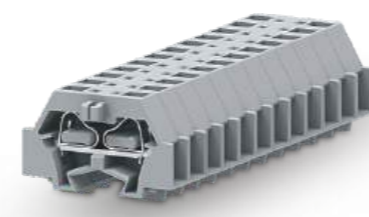

241系列一进一出带销钉侧面接线端子  
241 Series 1-1 Feed Through Terminal Block  
With Snap-in Mounting Feet of Side-entry

241系列两进两出带销钉侧面接线端子  
241 Series 2-2 Feed Through Terminal Block  
With Snap-in Mounting Feet of Side-entry

241系列一进一出侧面接线终端用端子  
241 Series 1-1 Feed Through End Terminal Block  
With Snap-in Mounting Feet of Side-entry

241系列两进两出侧面接线终端用端子  
241 Series 2-2 Feed Through End Terminal Block  
With Snap-in Mounting Feet of Side-entry

尺寸Size	
[mm]	
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
[mm <sup>2</sup> ]	
[AWG]	
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	28.1	18
额定参数Rated Parameters		
IEC	UL	
500	300	
24	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-14	28-14	28-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length 8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	28.1	18
额定参数Rated Parameters		
IEC	UL	
500	300	
24	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-14	28-14	28-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length 8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	28.1	18
额定参数Rated Parameters		
IEC	UL	
500	300	
24	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-14	28-14	28-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length 8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	28.1	18
额定参数Rated Parameters		
IEC	UL	
500	300	
24	15	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-14	28-14	28-14
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length 8-9		

产品Product	
颜色Colour	
灰Gray	
橙Orange	
白灰Light gray	
蓝Blue	
黄Yellow	
绿Green	
黄绿Yellow green	
粉Pink	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	

订货信息Order Information	
订货号Order NO.	
241311	
241312	
241313	
241314	
241315	
241316	
241317	
241319	

订货信息Order Information	
订货号Order NO.	
241341	
241342	
241343	
241344	
241345	
241346	
241347	
241349	

订货信息Order Information	
订货号Order NO.	
241321	
241322	
241323	
241324	
241325	
241326	
241327	
241329	

订货信息Order Information	
订货号Order NO.	
241351	
241352	
241353	
241354	
241355	
241356	
241357	
241359	


配套附件Accessory	
盖板Cover Plate	
平板Plate	灰Gray
	橙Orange
带固定器With Fixing Flanges	灰Gray
	橙Orange
带销钉With Snap-in Mounting Feet	灰Gray
	橙Orange
按键Press Button	白White
固定支架Fixed Support	灰Gray
跨接件Jumper	
位数Poles No.	颜色Colour
2	灰Gray

配套附件Accessory	
订货号Order NO.	
241641	
241642	
*	
*	
241631	
241632	
241221	
241019	
跨接件Jumper	
位数Poles No.	颜色Colour
2	灰Gray

配套附件Accessory	
订货号Order NO.	
241641	
241642	
*	
*	
241631	
241632	
241221	
241019	
跨接件Jumper	
位数Poles No.	颜色Colour
2	灰Gray

配套附件Accessory	
订货号Order NO.	
241641	
241642	
*	
*	
241631	
241632	
241221	
241019	
跨接件Jumper	
位数Poles No.	颜色Colour
2	灰Gray

配套附件Accessory	
订货号Order NO.	
241641	
241642	
*	
*	
241631	
241632	
241221	
241019	
跨接件Jumper	
位数Poles No.	颜色Colour
2	灰Gray

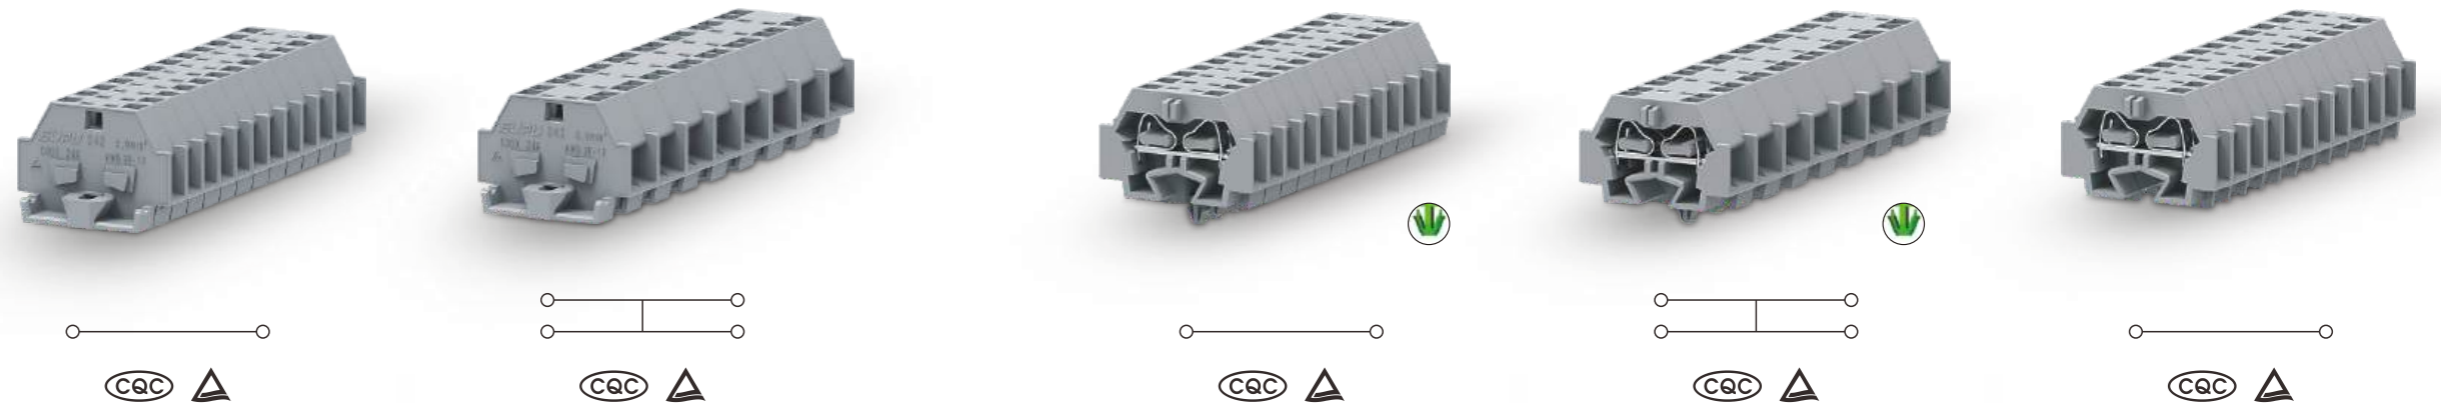

242系列一进一出带固定器侧面接线端子  
242 Series 1-1 Feed Through Terminal Block  
With Fixing Flanges of Side-entry

242系列两进两出带固定器侧面接线端子  
242 Series 2-2 Feed Through Terminal Block  
With Fixing Flanges of Side-entry

242系列一进一出带销钉侧面接线端子  
242 Series 1-1 Feed Through Terminal Block  
With Snap-in Mounting Feet of Side-entry

242系列两进两出带销钉侧面接线端子  
242 Series 2-2 Feed Through Terminal Block  
With Snap-in Mounting Feet of Side-entry

242系列一进一出侧面接线终端用端子  
242 Series 1-1 Feed Through End Terminal Block  
With Snap-in Mounting Feet of Side-entry

尺寸Size	
厚度Thickness	[mm]
宽度Width	
高度Height	
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
刚性Solid	[mm <sup>2</sup> ]
柔性Fine Stranded	[AWG]
带冷压头Furrule	
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
7	33.6	23.1
额定参数Rated Parameters		
IEC	UL	
630	300	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
9-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12	33.6	23.1
额定参数Rated Parameters		
IEC	UL	
630	300	
32	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
9-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
7	33.6	23.1
额定参数Rated Parameters		
IEC	UL	
630	300	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
9-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
12	33.6	23.1
额定参数Rated Parameters		
IEC	UL	
630	300	
32	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
9-10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
7	33.6	23.1
额定参数Rated Parameters		
IEC	UL	
630	300	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-4	0.2-2.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
9-10		

产品Product	
颜色Colour	
灰Gray	
橙Orange	
白灰Light gray	
蓝Blue	
黄Yellow	
绿Green	
黄绿Yellow green	
粉Pink	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	

订货信息Order Information	
订货号Order NO.	
242301	
242302	
242303	
242304	
242305	
242306	
242307	
242309	

订货信息Order Information	
订货号Order NO.	
242331	
242332	
242333	
242334	
242335	
242336	
242337	
242339	

订货信息Order Information	
订货号Order NO.	
242311	
242312	
242313	
242314	
242315	
242316	
242317	
242319	

订货信息Order Information	
订货号Order NO.	
242341	
242342	
242343	
242344	
242345	
242346	
242347	
242349	

订货信息Order Information	
订货号Order NO.	
242321	
242322	
242323	
242324	
242325	
242326	
242327	
242329	

配套附件Accessory	
订货号Order NO.	
盖板Cover Plate	
平板Plate	
带固定器With Fixing Flanges	
带销钉With Snap-in Mounting Feet	
按键Press Button	
固定支架Fixed Support	
跨接件Jumper	
位数Poles No.	
2	


配套附件Accessory	
订货号Order NO.	
*	
*	
242621	
242622	
*	
*	
*	
241019	
订货号Order NO.	
242601	

配套附件Accessory	
订货号Order NO.	
*	
*	
242621	
242622	
*	
*	
*	
241019	
订货号Order NO.	
242601	

配套附件Accessory	
订货号Order NO.	
242641	
242642	
*	
*	
242631	
242632	
*	
241019	
订货号Order NO.	
242601	

配套附件Accessory	
订货号Order NO.	
242641	
242642	
*	
*	
242631	
242632	
*	
241019	
订货号Order NO.	
242601	

配套附件Accessory	
订货号Order NO.	
242641	
242642	
*	
*	
242631	
242632	
*	
241019	
订货号Order NO.	
242601	




242系列两进两出侧面接线终端用端子  
242 Series 2-2 Feed Through End Terminal Block  
With Snap-in Mounting Feet of Side-entry

尺寸Size		技术参数Technical Parameter		
[mm]		厚度Thickness	宽度Width	高度Height
		12	33.6	23.1
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	630	300	
额定电流Rated Current	[A]	32	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-4	0.2-4	0.2-2.5
[AWG]		28-12	28-12	28-12
其余参数Other Parameters		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
		V0		
剥线长度Strip length	[mm]	9-10		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
灰Gray		242351		
橙Orange		242352		
白灰Light gray		242353		
蓝Blue		242354		
黄Yellow		242355		
绿Green		242356		
黄绿Yellow green		242357		
粉Pink		242359		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5				
端板Cover Plate		配套附件Accessory		
平板Plate		订货号Order NO.		
灰Gray		242641		
橙Orange		242642		
带固定器With Fixing Flanges		*		
带销钉With Snap-in Mounting Feet		*		
灰Gray		242631		
橙Orange		242632		
按键Press Button		*		
固定支架Fixed Support		241019		
跨接件Jumper				
位数Poles No.		订货号Order NO.		
颜色Colour				
2		灰Gray		
		242601		




254系列一进一出带固定器正面接线端子  
254 Series 1-1 Feed Through Terminal Block  
With Fixing Flanges of Front-entry

尺寸Size		技术参数Technical Parameter		
[mm]		厚度Thickness	宽度Width	高度Height
		6	32	22.2
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-2.5	0.2-2.5	0.2-1.5
[AWG]		28-12	28-12	28-12
其余参数Other Parameters		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
		V0		
剥线长度Strip length	[mm]	8-9		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
灰Gray		254301		
橙Orange		254302		
白灰Light gray		254303		
蓝Blue		254304		
黄Yellow		254305		
绿Green		254306		
黄绿Yellow green		254307		
粉Pink		*		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5				
端板Cover Plate		配套附件Accessory		
平板Plate		订货号Order NO.		
灰Gray		254625		
橙Orange		254626		
带固定器With Fixing Flanges		254621		
带销钉With Snap-in Mounting Feet		254622		
灰Gray		*		
橙Orange		*		
按键Press Button		*		
固定支架Fixed Support		*		
跨接件Jumper				
位数Poles No.		订货号Order NO.		
颜色Colour				
2		灰Gray		
		*		

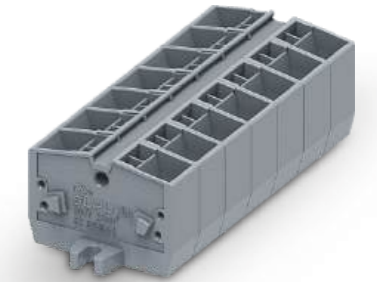

254系列两进两出带固定器正面接线端子  
254 Series 2-2 Feed Through Terminal Block  
With Fixing Flanges of Front-entry

尺寸Size		技术参数Technical Parameter		
[mm]		厚度Thickness	宽度Width	高度Height
		10	32	22.2
额定参数Rated Parameters		IEC	UL	
额定电压Rated Voltage	[V]	800	600	
额定电流Rated Current	[A]	24	20	
接线容量Wire Range		刚性Solid	柔性Fine Stranded	带冷压头Furrule
[mm <sup>2</sup> ]		0.2-2.5	0.2-2.5	0.2-1.5
[AWG]		28-12	28-12	28-12
其余参数Other Parameters		绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
		V0		
剥线长度Strip length	[mm]	8-9		
产品Product		订货信息Order Information		
颜色Colour		订货号Order NO.		
灰Gray		254331		
橙Orange		254332		
白灰Light gray		254333		
蓝Blue		254334		
黄Yellow		254335		
绿Green		254336		
黄绿Yellow green		254337		
粉Pink		*		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5				
端板Cover Plate		配套附件Accessory		
平板Plate		订货号Order NO.		
灰Gray		254625		
橙Orange		254626		
带固定器With Fixing Flanges		254621		
带销钉With Snap-in Mounting Feet		254622		
灰Gray		*		
橙Orange		*		
按键Press Button		*		
固定支架Fixed Support		*		
跨接件Jumper				
位数Poles No.		订货号Order NO.		
颜色Colour				
2		灰Gray		
		*		

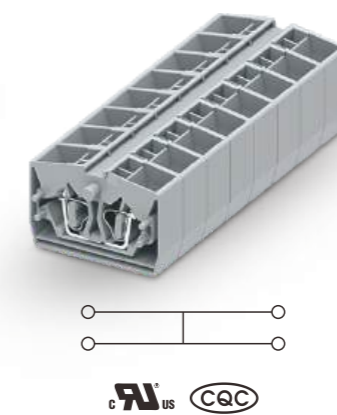

254系列一进一出带销钉正面接线端子  
254 Series 1-1 Feed Through Terminal Block  
With Snap-in Mounting Feet of Front-entry

254系列两进两出带销钉正面接线端子  
254 Series 2-2 Feed Through Terminal Block  
With Snap-in Mounting Feet of Front-entry

254系列一进一出正面接线中间端子  
254 Series 1-1 Feed Through Middle  
Terminal Block of Front-entry

254系列两进两出正面接线中间端子  
254 Series 2-2 Feed Through Middle  
Terminal Block of Front-entry

尺寸Size	
[mm]	
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
[mm <sup>2</sup> ]	
[AWG]	
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	32	22.2
额定参数Rated Parameters		
IEC	UL	
800	600	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	32	22.2
额定参数Rated Parameters		
IEC	UL	
800	600	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	32	22.2
额定参数Rated Parameters		
IEC	UL	
800	600	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	37	22.2
额定参数Rated Parameters		
IEC	UL	
800	600	
24	20	
接线容量Wire Range		
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
其余参数Other Parameters		
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
V0		
剥线长度Strip length		
8-9		

产品Product	
颜色Colour	
灰Gray	
橙Orange	
白灰Light gray	
蓝Blue	
黄Yellow	
绿Green	
黄绿Yellow green	
粉Pink	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	

订货信息Order Information	
订货号Order NO.	
254311	
254312	
254313	
254314	
254315	
254316	
254317	
*	

订货信息Order Information	
订货号Order NO.	
254341	
254342	
254343	
254344	
254345	
254346	
254347	
*	

订货信息Order Information	
订货号Order NO.	
254321	
254322	
254323	
254324	
254325	
254326	
254327	
*	

订货信息Order Information	
订货号Order NO.	
254351	
254352	
254353	
254354	
254355	
254356	
254357	
*	


配套附件Accessory	
订货号Order NO.	
平板Plate	
带固定器With Fixing Flanges	
带销钉With Snap-in Mounting Feet	
按键Press Button	
固定支架Fixed Support	
跨接件Jumper	
位数Poles No.	
2	

配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
跨接件Jumper	
订货号Order NO.	
*	

配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
跨接件Jumper	
订货号Order NO.	
*	


配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
跨接件Jumper	
订货号Order NO.	
*	

配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
跨接件Jumper	
订货号Order NO.	
*	

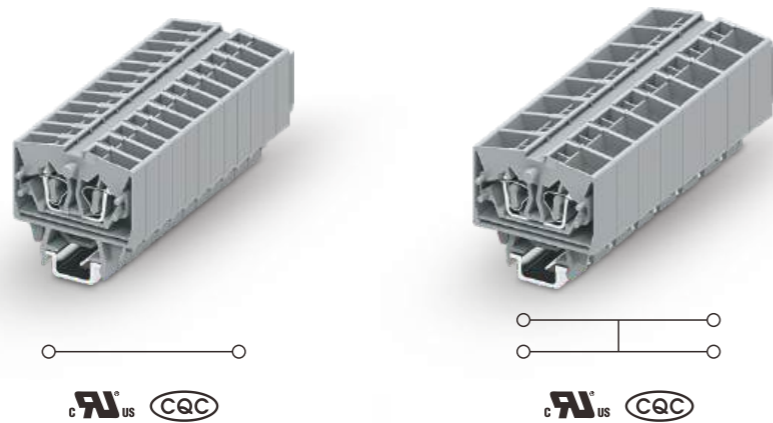

254系列一进一出正面接线端子(小导轨15)  
254 Series 1-1 Feed Through Terminal Block of Front-entry(SP15X7.5)

254系列一进一出正面接线端子(小导轨35)  
254 Series 1-1 Feed Through Terminal Block of Front-entry(SP35X7.5)

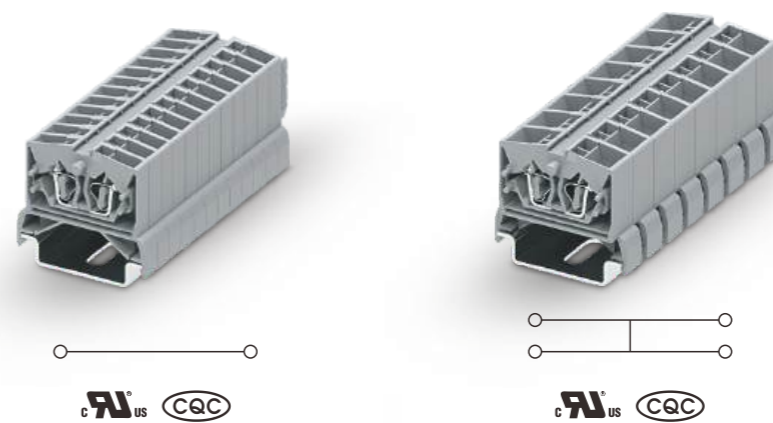

254系列一进一出正面接线端子(大导轨35)  
254 Series 1-1 Feed Through Terminal Block of Front-entry(SP35X7.5)

254系列两进两出正面接线端子(大导轨35)  
254 Series 2-2 Feed Through Terminal Block of Front-entry(SP35X7.5)

尺寸Size	
	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm <sup>2</sup> ]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	32	32.1
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
V0		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	32	32.1
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
V0		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6	32	32.1
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
V0		
8-9		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
10	37	31.6
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-2.5	0.2-2.5	0.2-1.5
28-12	28-12	28-12
V0		
8-9		

产品Product	
颜色Colour	
灰Gray	
橙Orange	
白灰Light gray	
蓝Blue	
黄Yellow	
绿Green	
黄绿Yellow green	
粉Pink	
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	

订货信息Order Information	
订货号Order NO.	
254361	
254362	
254363	
254364	
254365	
254366	
254367	
*	

订货信息Order Information	
订货号Order NO.	
254391	
254392	
254393	
254394	
254395	
254396	
254397	
*	

订货信息Order Information	
订货号Order NO.	
254371	
254372	
254373	
254374	
254375	
254376	
254377	
*	

订货信息Order Information	
订货号Order NO.	
254381	
254382	
254383	
254384	
254385	
254386	
254387	
*	

配套附件Accessory	
订货号Order NO.	
端板Cover Plate	
平板Plate	
带固定器With Fixing Flanges	
带销钉With Snap-in Mounting Feet	
按键Press Button	
固定支架Fixed Support	
跨接件Jumper	
位数Poles No.	
2	

配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
订货号Order NO.	
*	

配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
订货号Order NO.	
*	

配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
订货号Order NO.	
*	

配套附件Accessory	
订货号Order NO.	
254625	
254626	
254621	
254622	
*	
*	
*	
*	
*	
订货号Order NO.	
*	






254系列一进一出正面接地端子(小导轨15)  
254 Series 1-1 Feed Through Ground Terminal Block of Front-entry(SP15X7.5)



254系列一进一出正面接地端子(小导轨35)  
254 Series 1-1 Feed Through Ground Terminal Block of Front-entry(SP35X7.5)

		技术参数Technical Parameter			技术参数Technical Parameter		
<b>尺寸Size</b>		厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	[mm]	6	32	32.9	6	42.6	33.5
<b>额定参数Rated Parameters</b>		IEC	UL		IEC	UL	
额定电压Rated Voltage	[V]	*	*		*	*	
额定电流Rated Current	[A]	*	*		*	*	
<b>接线容量Wire Range</b>		刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
	[mm <sup>2</sup> ]	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5
	[AWG]	28-12	28-12	28-12	28-12	28-12	28-12
<b>其余参数Other Parameters</b>							
绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		V0			V0		
剥线长度Strip length	[mm]	8-9			8-9		
<b>产品Product</b>	颜色Colour 黄绿Yellow green	<b>订货信息Order Information</b>			<b>订货信息Order Information</b>		
		订货号Order NO. 254507			订货号Order NO. 254607		
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5							
<b>端板Cover Plate</b>		<b>配套附件Accessory</b>			<b>配套附件Accessory</b>		
		订货号Order NO.			订货号Order NO.		
平板Plate	灰Gray 橙Orange	254625 254626			254625 254626		
带固定器With Fixing Flanges	灰Gray 橙Orange	254621 254622			254621 254622		
带销钉 With Snap-in Mounting Feet	灰Gray 橙Orange	*			*		
按键Press Button	白White	*			*		
固定支架Fixed Support	灰Gray	*			*		
<b>跨接件Jumper</b>							
位数Poles No.	颜色Colour	订货号Order NO.			订货号Order NO.		
2	灰Gray	*			*		

## 附件 Accessory

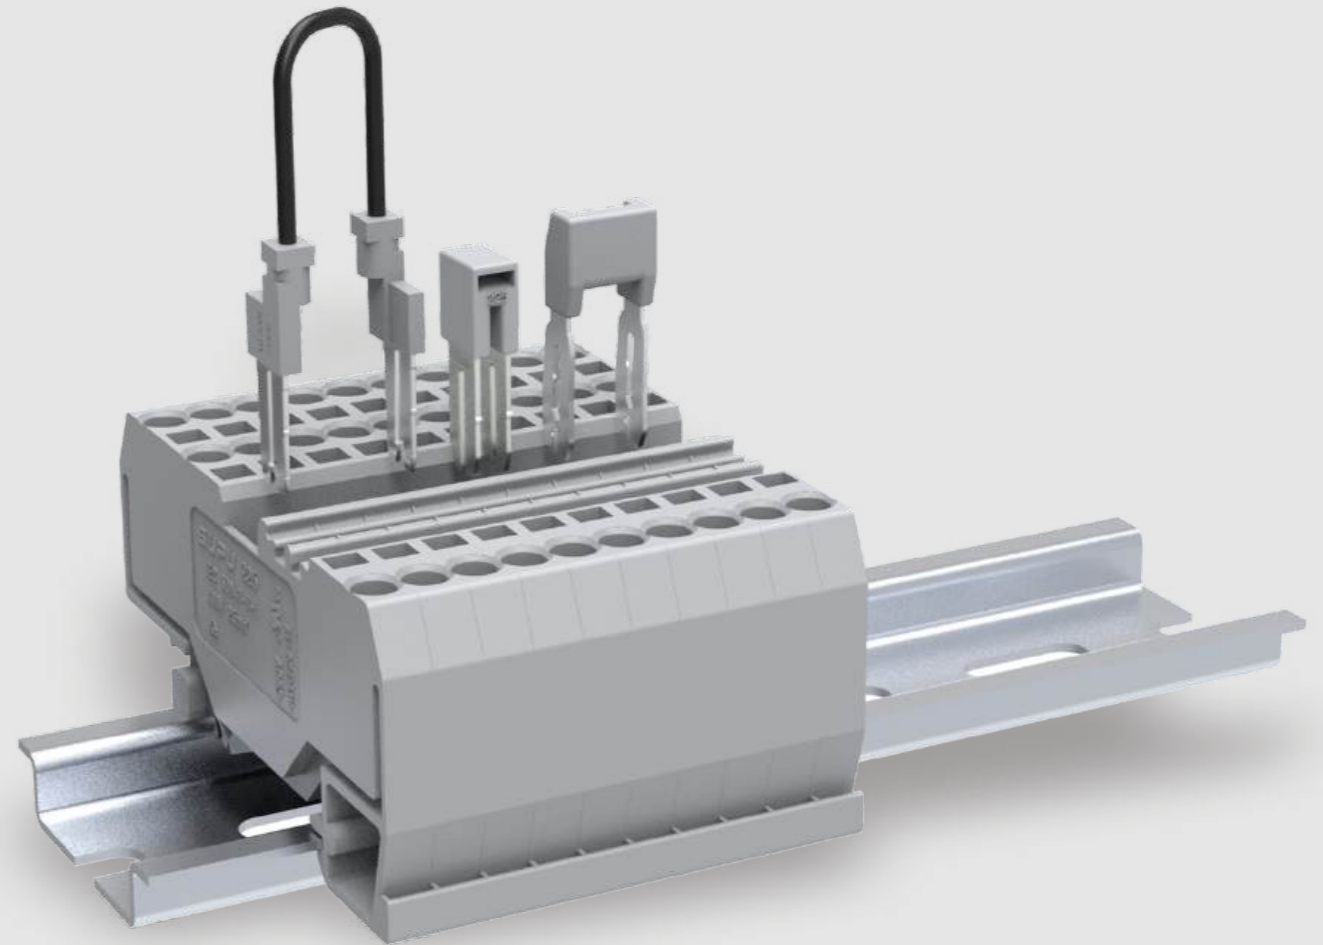

## 终端固定器 End Clamp



	SPD35螺钉 SPD35 Screw	SPD35卡式 T=10mm SPD35 Clip T=10mm	双层弹端子终端固定器 Double level terminal block end Clamp
<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 9.5 宽度Width 46.1 高度Height 35.1	厚度Thickness 10 宽度Width 43.7 高度Height 28	厚度Thickness 10 宽度Width 55.5 高度Height 50
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
<b>订货信息Order Information</b>	<b>订货信息Order Information</b>	<b>订货信息Order Information</b>	<b>订货信息Order Information</b>
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray		
<b>包装数量Package quantity</b>	订货号Order NO. 215201 100	订货号Order NO. 215202 100	订货号Order NO. 215207 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. 215210 225801	订货号Order NO. TMB10.2-10

	SPD15卡式 T=5.2mm SPD15 Clip T=5.2mm
<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 5.2 宽度Width 22.7 高度Height 22.1
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
<b>订货信息Order Information</b>	<b>订货信息Order Information</b>
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray
<b>包装数量Package quantity</b>	订货号Order NO. 215208 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. 900421/061
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. 305801

## 终端标识牌 End Clamp marking



新品  
NEW

	SPD35卡式 T=6mm SPD35 Clip T=6mm	SPD35螺钉 SPD35 Screw	Sp15 导轨固定器 SP15 Screw
<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 6 宽度Width 43.7 高度Height 28	厚度Thickness 9.4 宽度Width 44.1 高度Height 33	厚度Thickness 6 宽度Width 22 高度Height 11.6
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
<b>订货信息Order Information</b>	<b>订货信息Order Information</b>	<b>订货信息Order Information</b>	<b>订货信息Order Information</b>
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray		
<b>包装数量Package quantity</b>	订货号Order NO. 215203 100	订货号Order NO. 215204 100	订货号Order NO. 215206 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001	订货号Order NO. 900421/011 900421/031 900401/001 900421/021 900431/001 215214	订货号Order NO. 900421/061
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. 225801	订货号Order NO. 308801	订货号Order NO. *

	铭牌支持件 Nameplate holder	透明标记牌 Transparent Marker card	铭牌固定器 Nameplate Clamp
<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>	<b>技术参数Technical Parameter</b>
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 1.0 宽度Width 30.5 高度Height 10	厚度Thickness 9.4 宽度Width 46 高度Height 36.8	厚度Thickness 11.5 宽度Width 48.6 高度Height 40.3
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
<b>订货信息Order Information</b>	<b>订货信息Order Information</b>	<b>订货信息Order Information</b>	<b>订货信息Order Information</b>
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray		
<b>包装数量Package quantity</b>	订货号Order NO. 215210 100	订货号Order NO. 215214 100	订货号Order NO. 215224 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. 215202	订货号Order NO. 215204	订货号Order NO. *
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *

## 导轨转换器 Rail transfer



	导轨转换器[用于254端子带销钉] 254 Rail transfer	450导轨转换器 450 Rail transfer	450导轨转换器(适用于继电器模块) 450 Rail transfer
	技术参数Technical Parameter		
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 6 宽度Width 38 高度Height 12.7	厚度Thickness 6.4 宽度Width 41.7 高度Height 10.6	厚度Thickness 4.9 宽度Width 42.8 高度Height 14.3
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
	订货信息Order Information		
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray		
<b>包装数量Package quantity</b>	订货号Order NO. 254611 100	订货号Order NO. 450018 100	订货号Order NO. 450017 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	适用于SP254微型端子(带销钉) Apply to SP 254 miniature terminal block (with snap in mounting feet)	适用于SP450/475连接器; SP240/241/242微型端子(带销钉) Apply to SP 450/475 connector SP240/241/242 miniature terminal block (with snap in mounting feet)	适用于继电器模块 Apply to relay module
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *



	241 导轨转换器 241 Rail transfer
	技术参数Technical Parameter
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 6.3 宽度Width 43.3 高度Height 10.5
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray
<b>包装数量Package quantity</b>	订货号Order NO. 241019 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	适用于SP241微型端子(带固定器) Apply to SP 241 miniature terminal block (with end stop)
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *

## 分组隔片 Partition plate



	TU隔板 TP Partition plate	TP隔板 TP Partition plate	TS-K隔板 TS-K Partition plate
	技术参数Technical Parameter		
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 1 宽度Width 22.1 高度Height 22.15		
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
	订货信息Order Information		
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray		
<b>包装数量Package quantity</b>	订货号Order NO. ATP-TU 100	订货号Order NO. ATP-TP 100	订货号Order NO. 302151 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	TUXX-2系列	TPXX-2系列	UK系列
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *



	UK35隔板 Nameplate Clamp
	技术参数Technical Parameter
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness 7.5 宽度Width 50.1 高度Height 52
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0
	订货信息Order Information
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray
<b>包装数量Package quantity</b>	订货号Order NO. ATP-UK 35 100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	335系列
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *

## 保护盖板 Protection cover



	塑料/透明保护罩 Transparent rail cover			透明保护罩支架 Support plate			透明保护罩支架(带塑料滚花螺母) Support palte(With screw)		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	2	94	44.8	2.2	91.65	72.7	2.2	91.65	89
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0		
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	颜色Colour 灰Gray			订货信息Order Information			订货信息Order Information		
包装数量Package quantity	订货号Order NO. 900601			订货号Order NO. 900611			订货号Order NO. 900612		
	100			100			100		
	订货号Order NO. 900611			订货号Order NO. 900421/011			订货号Order NO. 900421/011		
	900612			900421/031			900421/031		
				900401/001			900401/001		
				900421/021			900421/021		
				900431/001			900431/001		
				900601			900601		
适用轨道/型号 Can Be Used For DIN Rail/Product									
标记Marker	订货号Order NO. *			订货号Order NO. *			订货号Order NO. *		
可提供印字服务Printing Service									

## TP/TU/TC系列跨接桥 TP/TU/TC Jumper



	TJA3.5			TJA4.2			TJA5.2		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0		
订货信息Order Information	订货号Order NO. TJA3.5-2			订货号Order NO. TJA4.2-2			订货号Order NO. TJA5.2-2		
	TJA3.5-3			TJA4.2-3			TJA5.2-3		
	.....			.....			.....		
	TJA3.5-9			TJA4.2-9			TJA5.2-9		
	TJA3.5-10			TJA4.2-10			TJA5.2-10		
包装数量Package quantity	50			50			50		
	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适用轨道/型号 Can Be Used For DIN Rail/Product	TP1.5;TPD1.5系列			TC1.5系列			TP2.5;TC2.5;TU2.5系列		
标记Marker	订货号Order NO. *			订货号Order NO. *			订货号Order NO. *		
可提供印字服务Printing Service									

## TP/TU/TC系列跨接桥 TP/TU/TC Jumper



	TJA6.2			TJA8.2			TJA10.2		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0		
订货信息Order Information	订货号Order NO. TJA6.2-2			订货号Order NO. TJA8.2-2			订货号Order NO. TJA10.2-2		
	TJA6.2-3			TJA8.2-3			TJA10.2-3		
	.....			.....			.....		
	TJA6.2-9			TJA8.2-9			TJA10.2-9		
	TJA6.2-10			TJA8.2-10			TJA10.2-10		
包装数量Package quantity	50			50			50		
	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适用轨道/型号 Can Be Used For DIN Rail/Product	TP4;TC4;TU4系列			TP6;TC6;TU6系列			TP10;TC10;TU10系列		
标记Marker	订货号Order NO. *			订货号Order NO. *			订货号Order NO. *		
可提供印字服务Printing Service									



	TJA12.2			TJA16.2			TJB5.2		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0		
订货信息Order Information	订货号Order NO. TJA12.2-2			订货号Order NO. TJA16.2-2			订货号Order NO. TJB5.2-2		
	TJA12.2-3			TJA16.2-3			TJB5.2-3		
	.....			.....			.....		
	TJA12.2-9			TJA16.2-9			TJB5.2-9		
	TJA12.2-10			TJA16.2-10			TJB5.2-10		
包装数量Package quantity	50			50			50		
	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适用轨道/型号 Can Be Used For DIN Rail/Product	TP16;TC16;TU16系列			TC35;TU35系列			TP2.5;TC2.5;TU2.5系列		
标记Marker	订货号Order NO. *			订货号Order NO. *			订货号Order NO. *		
可提供印字服务Printing Service									

## TA系列跨接桥 TA Jumper



	215轨装端子相邻跨接桥 215 Adjacent Jumper	225轨装端子相邻跨接桥 225 Adjacent Jumper	204 轨装端子相邻跨接桥 204 Adjacent Jumper
<b>尺寸Size</b>	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 4 22.45 8	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 4.9 21.9 7.8	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 11 32 13.5
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
<b>订购信息Order Information</b>	<b>订购信息Order Information</b>	<b>订购信息Order Information</b>	<b>订购信息Order Information</b>
位数Poles No. 颜色Colour 2 灰Gray	订货号Order NO. 215301	订货号Order NO. 225301	订货号Order NO. 216301
<b>包装数量Package quantity</b>	100	100	100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. SP215系列	订货号Order NO. SP225系列	订货号Order NO. SP204系列
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *

## TA系列跨接桥 TA Jumper



	225系列3位灰色交错跨接桥 225 Adjacent Jumper	导线跨接器 Wire Jumper
<b>尺寸Size</b>	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 9.7 25.4 5.75	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 3.8 24.7 8.1
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0
<b>订购信息Order Information</b>	<b>订购信息Order Information</b>	<b>订购信息Order Information</b>
位数Poles No. 颜色Colour 2 灰Gray	订货号Order NO. 225321-3	订货号Order NO. 225311(L=60mm) 225312(L=110mm) 225313(L=250mm)
<b>包装数量Package quantity</b>	100	100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. SP225系列	订货号Order NO. SP225系列
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *

## UK系列跨接桥 UK Jumper



	206轨装端子相邻跨接桥 206 Adjacent Jumper	210轨装端子相邻跨接桥 210 Adjacent Jumper	216轨装端子相邻跨接桥 216 Adjacent Jumper
<b>尺寸Size</b>	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 8 25.5 8	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 9.7 26.5 9	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 11 32 13.5
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
<b>订购信息Order Information</b>	<b>订购信息Order Information</b>	<b>订购信息Order Information</b>	<b>订购信息Order Information</b>
位数Poles No. 颜色Colour 2 灰Gray	订货号Order NO. 216301	订货号Order NO. 210301	订货号Order NO. 216301
<b>包装数量Package quantity</b>	100	100	100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. SP206系列	订货号Order NO. SP210系列	订货号Order NO. SP216系列
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *



	302 固定式带绝缘全螺钉跨接件 302 Fixed screw with insulating ring- jumper	303 固定式带绝缘全螺钉跨接件 303 Fixed screw with insulating ring- jumper	306 固定式带绝缘全螺钉跨接件 306 Fixed screw with insulating ring- jumper
<b>尺寸Size</b>	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 1 6.15 5.55	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 1 5.2 5.2	<b>技术参数Technical Parameter</b> 厚度Thickness 宽度Width 高度Height 1 8.2 6.4
<b>其余参数Other Parameters</b> 绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	V0	V0	V0
<b>订购信息Order Information</b>	<b>订购信息Order Information</b>	<b>订购信息Order Information</b>	<b>订购信息Order Information</b>
位数Poles No.	订货号Order NO. 2 302302 3 302303 ..... 9 302309 10 302310	订货号Order NO. 303302 303303 ..... 303309 303310	订货号Order NO. 306302 306303 ..... 306309 306310
<b>包装数量Package quantity</b>	100	100	100
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	订货号Order NO. SP302系列; 305系列	订货号Order NO. SP303系列	订货号Order NO. SP306系列
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *

## UK系列跨接桥 UK Jumper



310 固定式带绝缘圈螺钉跨接件  
310 Fixed screw with insulating ring-jumper



316 固定式带绝缘圈螺钉跨接件  
316 Fixed screw with insulating ring-jumper



335 固定式带绝缘圈螺钉跨接件  
335 Fixed screw with insulating ring-jumper

	310 固定式带绝缘圈螺钉跨接件 310 Fixed screw with insulating ring-jumper			316 固定式带绝缘圈螺钉跨接件 316 Fixed screw with insulating ring-jumper			335 固定式带绝缘圈螺钉跨接件 335 Fixed screw with insulating ring-jumper		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	310302			316302			335302		
3	310303			316303			335303		
.....	.....			.....			.....		
9	310309			316309			335309		
10	310310			316310			335310		
包装数量Package quantity	100			100			100		
适用轨道/型号 Can Be Used For DIN Rail/Product	SP310系列			SP316系列			SP335系列		
标记Marker 可提供印字服务Printing Service	*			*			*		



开关桥接件  
Contact bridge



固定边插式-跨接件  
Fixed side insert-jumper

	开关桥接件 Contact bridge			固定边插式-跨接件 Fixed side insert-jumper		
	技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0		
位数Poles No.	订货号Order NO.			订货号Order NO.		
2	306322			306320		
3						
.....						
9						
10						
包装数量Package quantity	100			100		
适用轨道/型号 Can Be Used For DIN Rail/Product	订货号Order NO.			订货号Order NO.		
	SUK6-T;306911			SUK6-T;306911		
标记Marker 可提供印字服务Printing Service	*			*		

## TB系列跨接桥 TB Jumper



240跨接桥  
240 Adjacent Jumper



241跨接桥  
241 Adjacent Jumper



242跨接桥  
242 Adjacent Jumper

	240跨接桥 240 Adjacent Jumper			241跨接桥 241 Adjacent Jumper			242跨接桥 242 Adjacent Jumper		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0		
位数Poles No.	订货号Order NO.			订货号Order NO.			订货号Order NO.		
2	240601			241601			242601		
包装数量Package quantity	订货号Order NO.			订货号Order NO.			订货号Order NO.		
适用轨道/型号 Can Be Used For DIN Rail/Product	SP240系列			Sp241系列			Sp242系列		
标记Marker 可提供印字服务Printing Service	*			*			*		

## 导轨终端固定件 Rail end cap



7.5\*35导轨终端保护件  
7.5\*35 Rail end cap

	7.5*35导轨终端保护件 7.5*35 Rail end cap		
	技术参数Technical Parameter		
尺寸Size	厚度Thickness	宽度Width	高度Height
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94		
位数Poles No.	订货号Order NO.		
2	920001		
3			
.....			
9			
10			
包装数量Package quantity	100		
适用轨道/型号 Can Be Used For DIN Rail/Product	订货号Order NO.		
	900421/011 900421/031 900421/001 900421/021		
标记Marker 可提供印字服务Printing Service	*		

## 测试插头 Test Plug



	1.5mm <sup>2</sup> , 测试插头空 1.5mm <sup>2</sup> Test Plug			1.5mm <sup>2</sup> , 测试插头带电阻 1.5mm <sup>2</sup> Test Plug with resistance		
	技术参数Technical Parameter			技术参数Technical Parameter		
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	3.5	30	37.9	3.5	30	37.9
<b>其余参数Other Parameters</b>	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0		
	V0			V0		
	订货信息Order Information			订货信息Order Information		
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	订货号Order NO.			订货号Order NO.		
<b>颜色Colour</b> 黑Black	TP1.5-DP			TP1.5-DPR120		
<b>包装数量Package quantity</b>	订货号Order NO.			订货号Order NO.		
	TP1.5系列			TP1.5系列		
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product						
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *			订货号Order NO. *		

## 导轨 Rails



	铝轨-7.5*35(4.8X25X10.5) Aluminum-7.5*35(4.8X25X10.5)			小导轨(钢轨)-5.5*15(4.2*12.2) Steel-5.5*15(2.2X12.2)		
	技术参数Technical Parameter			技术参数Technical Parameter		
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	1	35	7.5	1	15	5.5
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	订货号Order NO.			订货号Order NO.		
<b>颜色Colour</b> 灰Gray	900431/001			900421/061		
<b>包装数量Package quantity</b>	订货号Order NO.			订货号Order NO.		
	订货号Order NO.			订货号Order NO.		
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	适用于SP35尺寸产品			适用于SP15尺寸产品		
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *			订货号Order NO. *		

## 导轨 Rails



	钢轨-7.5*35(5.2X15X10) Steel-7.5*35(5.2X15X10)			钢轨-7.5*35(5.2X25X11) Steel-7.5*35(5.2X25X11)			钢轨-7.5*35(无孔) Steel-7.5*35(无孔)		
	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
<b>尺寸Size</b> 注: 安装NS35/7.5导轨后的高度 Note: Height With DIN Rail NS 35/7.5	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
	1	35	7.5	1	35	7.5	1	35	7.5
<b>适配NS 35/7.5导轨</b> Can Be Used For DIN Rail NS 35/7.5	订货号Order NO.			订货号Order NO.			订货号Order NO.		
<b>颜色Colour</b> 灰Gray	900421/011			900421/031			900401/001		
<b>包装数量Package quantity</b>	订货号Order NO.			订货号Order NO.			订货号Order NO.		
	订货号Order NO.			订货号Order NO.			订货号Order NO.		
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	适用于SP35尺寸产品			适用于SP35尺寸产品			适用于SP35尺寸产品		
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *			订货号Order NO. *			订货号Order NO. *		

## 弹簧接线端子专用工具 Special tools for spring terminal blocks



	1A型单脚插棒-5.0mm 1A type 1 way connect bar-5.0mm		2A型双脚插棒-5.0mm 2A type 2 way connect bar-5.0mm		10A型十脚插棒-5.0mm 10 way connect bar-5.0mm	
	订货信息Order Information		订货信息Order Information		订货信息Order Information	
<b>订货号Order NO.</b>	910111		910112		910120	
<b>包装数量Package quantity</b>	订货号Order NO.		订货号Order NO.		订货号Order NO.	
	订货号Order NO.		订货号Order NO.		订货号Order NO.	
<b>适用轨道/型号</b> Can Be Used For DIN Rail/Product	SP240系列		SP240系列		SP240系列	
<b>标记Marker</b> 可提供印字服务Printing Service	订货号Order NO. *		订货号Order NO. *		订货号Order NO. *	


# 弹簧接线端子专用工具 Special tools for spring terminal blocks



一字螺丝刀 screw driver (刀口 edge: 2.5x0.4mm)      一字螺丝刀 screw driver (刀口 edge: 3.5x0.5mm)      一字螺丝刀 screw driver (刀口 edge: 5.5x0.8mm)

订货信息 Order Information	订货信息 Order Information	订货信息 Order Information
订货号 Order NO. 910024	订货号 Order NO. 910025	订货号 Order NO. 910026
包装数量 Package quantity	包装数量 Package quantity	包装数量 Package quantity
订货号 Order NO.	订货号 Order NO.	订货号 Order NO.
适用轨道/型号 Can Be Used For DIN Rail	适用轨道/型号 Can Be Used For DIN Rail	适用轨道/型号 Can Be Used For DIN Rail
适用于1.5平方端子 1.5mm <sup>2</sup> Terminal block	适用于2.5,4平方端子 2.5/4mm <sup>2</sup> Terminal block	适用于6,10,16平方端子 6/10/16mm <sup>2</sup> Terminal block
标记 Marker 可提供印字服务 Printing Service	标记 Marker 可提供印字服务 Printing Service	标记 Marker 可提供印字服务 Printing Service
订货号 Order NO. *	订货号 Order NO. *	订货号 Order NO. *

# 标记牌 Marker card

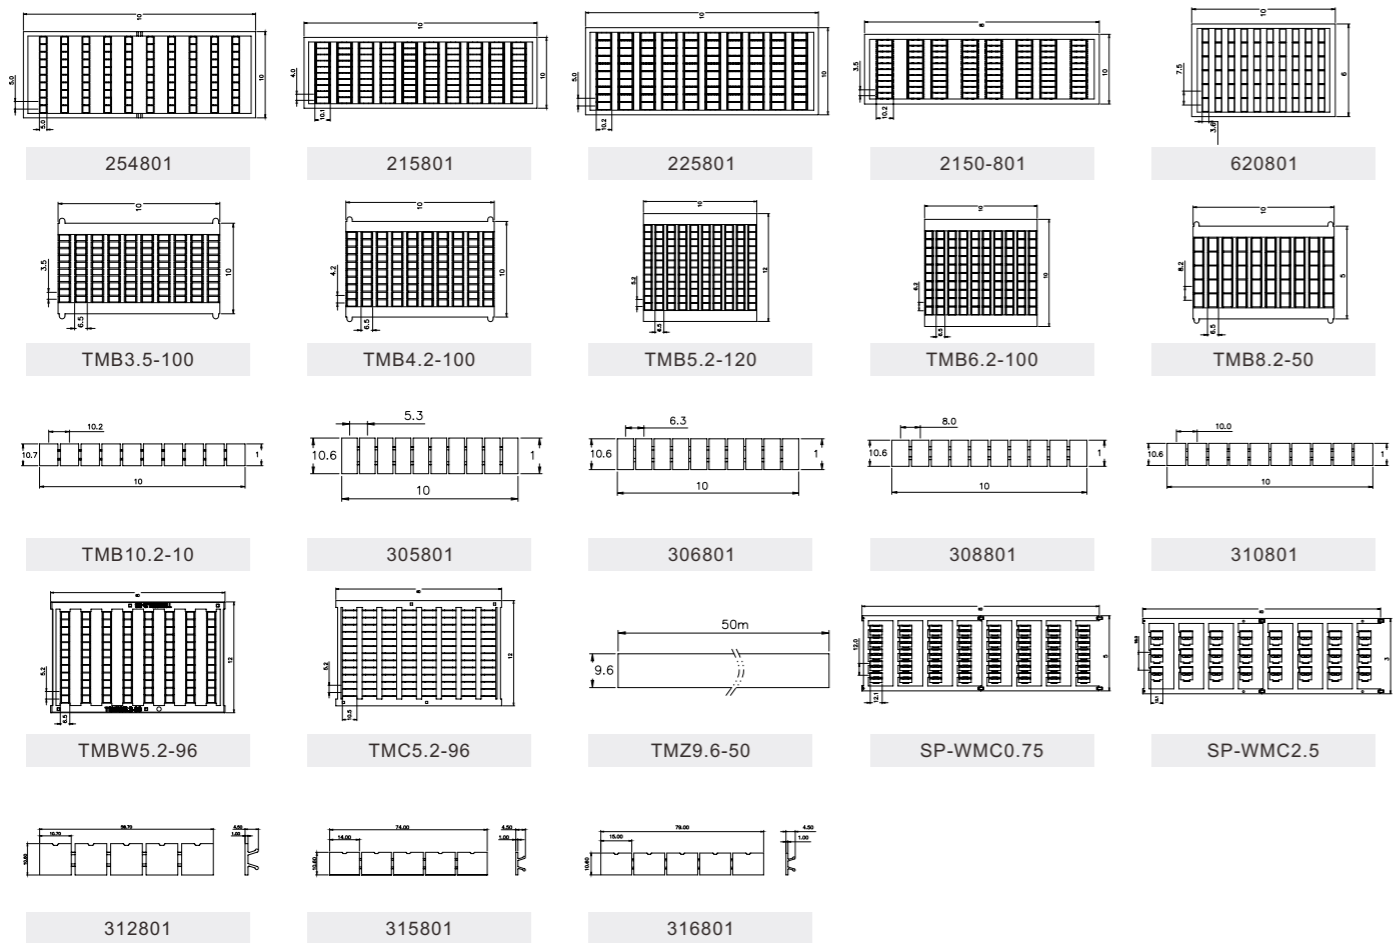

尺寸 Size	技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter		
	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number
	5.0	5.0	10X10=100	4.0	10.1	10X10=100	5.0	10.2	10X10=100	3.5	10.2	10X8=80
其余参数 Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0		
订货信息 Order Information	订货号 Order NO.			订货号 Order NO.			订货号 Order NO.			订货号 Order NO.		
颜色 Colour	白 White			254801			215801			225801		
包装数量 Package quantity	5			5			5			5		

尺寸 Size	技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter		
	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number
	7.5	3.6	6X10=60	3.5	6.5	10X10=100	4.2	6.5	10X10=100	5.2	6.5	12X10=120
其余参数 Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0		
订货信息 Order Information	订货号 Order NO.			订货号 Order NO.			订货号 Order NO.			订货号 Order NO.		
颜色 Colour	白 White			620-801			TMB3.5-100			TMB4.2-100		
包装数量 Package quantity	5			5			5			5		

尺寸 Size	技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter		
	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number
	6.2	6.5	10X10=100	8.2	6.5	5X10=50	10.2	10.7	10X1=10	5.3	10.6	10X1=10
其余参数 Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0		
订货信息 Order Information	订货号 Order NO.			订货号 Order NO.			订货号 Order NO.			订货号 Order NO.		
颜色 Colour	白 White			TMB6.2-100			TMB8.2-50			TMB10.2-10		
包装数量 Package quantity	5			5			5			5		

尺寸 Size	技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter			技术参数 Technical Parameter		
	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number
	6.3	10.6	10X1=10	8.0	10.6	10X1=10	10.0	10.6	10X1=10	5.2	6.5	12X8=96
其余参数 Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94			V0			V0			V0		
订货信息 Order Information	订货号 Order NO.			订货号 Order NO.			订货号 Order NO.			订货号 Order NO.		
颜色 Colour	白 White			306801			308801			310801		
包装数量 Package quantity	5			5			5			5		



尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number
	5.2	1.5	12X8=96	/	9.6	/	12.0	12.1	5X8=40	18	12.1	3X8=24
<b>其余参数Other Parameters</b>												
绝缘材料/阻燃等级, 符合UL94 <small>Insulating Material / Flame Retardant Grade, Conforming to UL94</small>	V0			V0			V0			V0		
<b>订货信息Order Information</b>												
颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.			订货号Order NO.		
白White	TMC5.2-96			TMZ9.6-50			SP-WMC0.75			SP-WMC2.5		
<b>包装数量Package quantity</b>	5			1			1			1		

尺寸Size	技术参数Technical Parameter			技术参数Technical Parameter			技术参数Technical Parameter		
	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number	间距 Pitch	长度 Length	每张卡片上数量 (行x列) Number
	12.2	10.7	5	15	14	5	16	15	5
<b>其余参数Other Parameters</b>									
绝缘材料/阻燃等级, 符合UL94 <small>Insulating Material / Flame Retardant Grade, Conforming to UL94</small>	V0			V0			V0		
<b>订货信息Order Information</b>									
颜色Colour	订货号Order NO.			订货号Order NO.			订货号Order NO.		
白White	312801			315801			316801		
<b>包装数量Package quantity</b>	5			5			5		

