宁波速普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD.

地址 | 浙江省慈溪市高新技术产业开发区新兴四路150号
Add | #150,Xinxing No.4 Rd, High-tech Zone ,Cixi, Zhejiang,China.
P.C. | 315303
Service Hotline | 400-626-6336
Tel | 0574-63288158
Fax | 0574-63288170
E-mail | askme@supu.cn
Http | www.supu.com.cn

PCB连接器及端子选型手册 PCB CONNECTORS AND TERMINAL BLOCKS V2.4 I

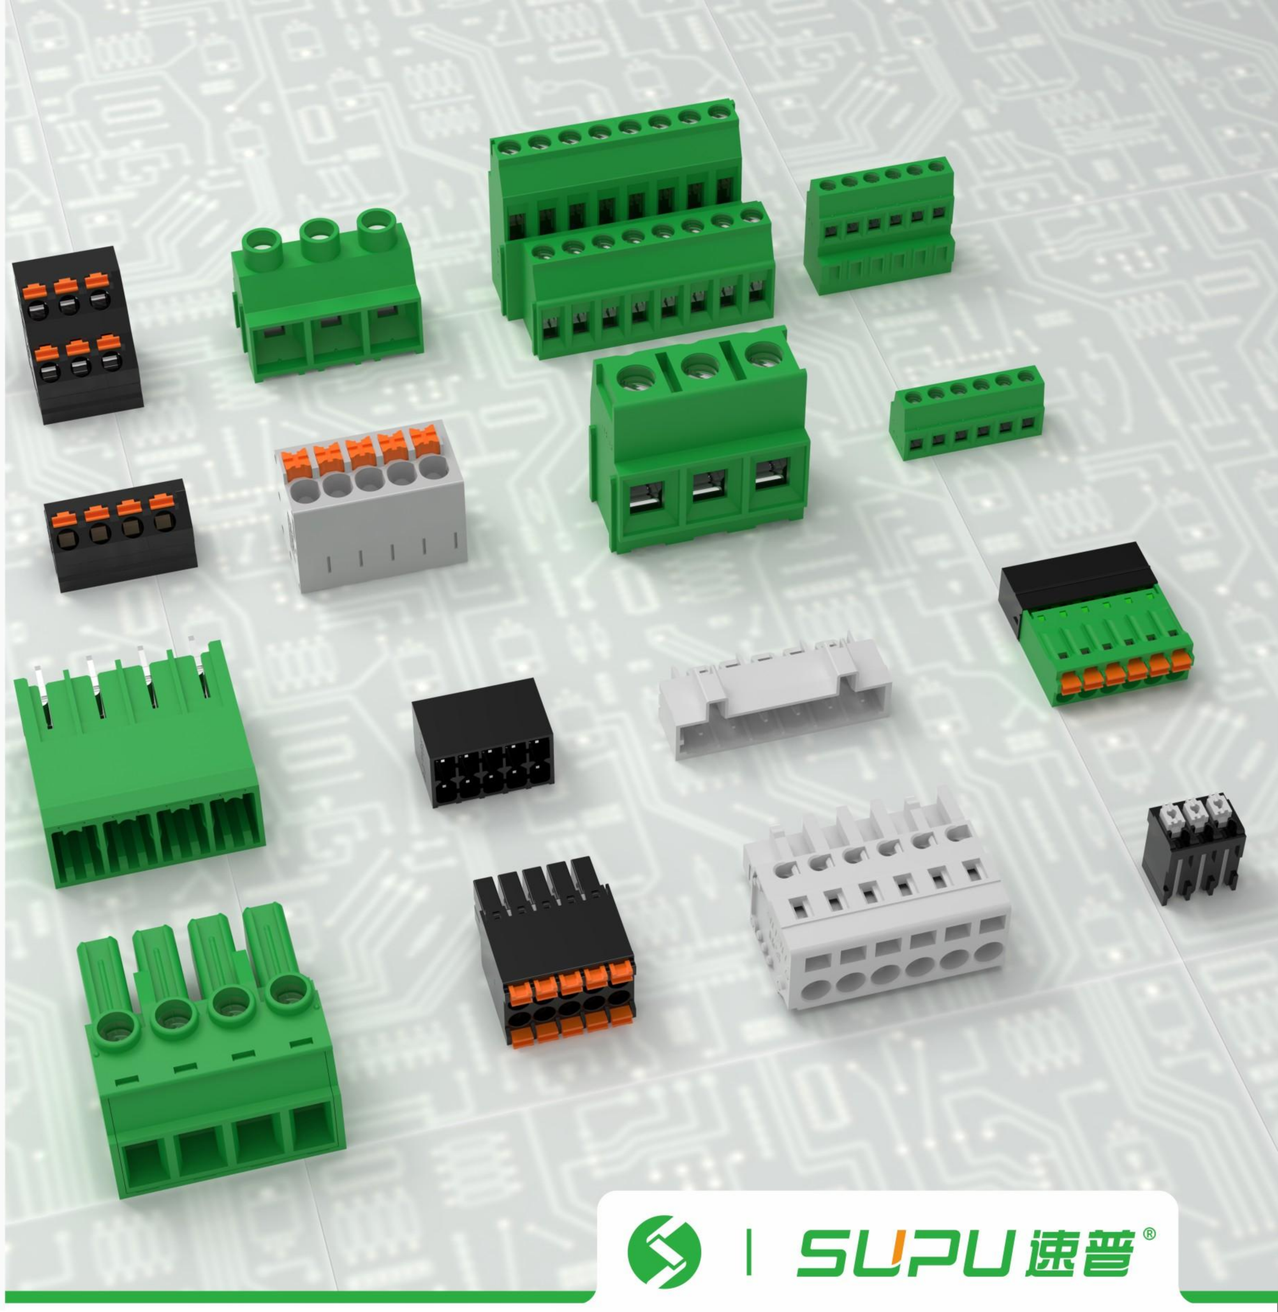

SUPU 速普®

V2.4 I

PCB连接器及端子选型手册
PCB CONNECTORS AND TERMINAL BLOCKS

公司简介 Company Profile

宁波速普电子成立于1999年，现有电连接器、工业开关、电子产品、定制化产品四大业务版块，是一家集研发、生产、销售、服务于一体的电气产业全球优秀供应商。

速普产品包括轨装接线端子、PCB连接器、工业开关、圆形连接器、重载连接器、接口模块等。公司产品已通过CQC、UL、VDE、TUV、CE、ROHS、REACH等多项认证。公司已通过ISO9001、ISO14001、ISO/TS22163和IATF16949等管理体系认证。

速普产品广泛应用于电梯、电力、轨道交通、工业自动化、新能源、照明、船舶、仪器仪表、机械设备等领域。自公司创立以来，秉承产品创新与科技前瞻的精神，建立了先进的技术研发中心，已获得国家高新技术企业、国家专精特新小巨人企业、宁波工程技术中心等多项荣誉。

在提供标准产品外，同时为客户带去定制化产品解决方案，有效满足客户个性化需求。速普建立了完善的全球销售网络，产品畅销中国、俄罗斯、德国、西班牙、美国、巴西、日本等100多个国家和地区。

Ningbo Supu Electronics Co., Ltd. was established in 1999, which has been a collection of R&D, production, sales, service in one of the world's outstanding suppliers of electrical industry, with four business sections: electrical connector, industrial switch, electronic products, and customized components.

Supu products include Rail-mounted terminals, PCB connectors, Industrial switches, Circular connectors, Heavy-duty connectors, Interface modules, etc. which have have passed CQC, UL, VDE, TUV, CE, ROHS, REACH and other certifications. The company has passed ISO9001, ISO14001, ISO/TS22163 and IATF16949 management system certification.

Supu products are widely used in elevator, electric power, rail transit, industrial automation, new energy, lighting, ships, instruments, mechanical equipment and other fields. Since its establishment, adhering to the spirit of product innovation and technological foresight, the company has established an advanced technology research and development center, which has won many honors such as National High-tech Enterprise, National Specialized and New Small Giant Enterprise, Ningbo Engineering Technology Center, etc.

In addition to providing standard products, Supu also bring customized product solutions to effectively meet customers' personalized needs. Supu has established a perfect global sales network, and its products sell well in more than 100 countries and regions such as China, Russia, Germany, Spain, the United States, Brazil , Japan, etc.

企业文化 Enterprise Culture

使命 Mission

追求全体员工物质和精神两方面的幸福，提升企业价值，
为人类和社会进步与发展做出贡献
Pursuit happiness of all staff in material & spiritual, promote the enterprise value, contribute to the progress & development for human & society

愿景 Corporation Vision

成为全球电气产业经营典范
To be the model of the global electric industry

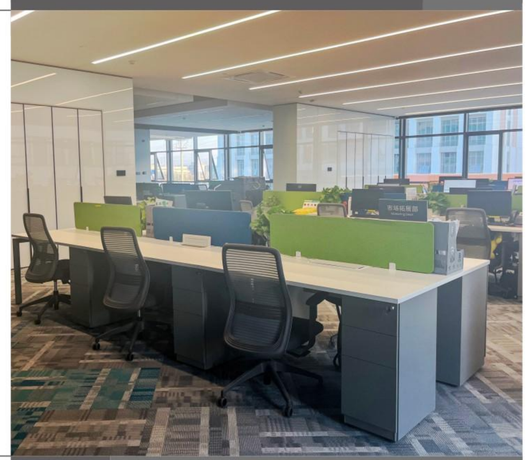

核心价值观 Core Values

勤奋、创新、内求、利他
Diligence, Innovative, Self-seeking, Altruism

质量方针 Quality Policy

追求全程精益品质 持续改进 超越顾客期望 打造行业品牌
To pursuit full lean quality Continuous improvement Exceed customers expectations Build industry brand

2024拼搏年 He Year of Striving for 2024

踔厉奋发 笃行不怠
让数字化流程驱动运营 用阿米巴实现全员经营

Forge ahead with perseverance and unwavering determination.
Let digital processes drive operations, and achieve all-staff management with the Amoeba philosophy.

MC 系列连接器
MC Series Terminal Blocks

该系列产品采用压线框螺钉连接、正面螺钉连接，Push-in弹簧连接等多种接线技术。客户可根据需求实现线到线，线到板、板到线、板到板的布线方式。该系列产品可以连接0.2mm²到35mm²所有类型导线，间距从2.5mm至20mm,广泛应用于电力、自动化、轨道交通等行业。

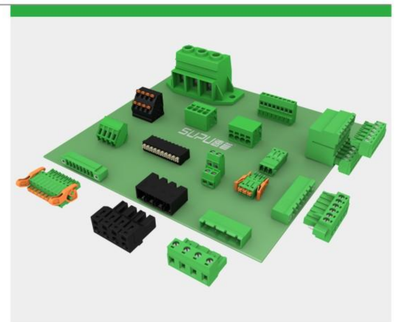

MC系列插拔式接线端子选型编码 MC series pluggable terminal blocks coding rule

页码/Page: 01-58

MC系列孔型接线端子 MC series female connector

MC - R A 3.81 H 15 C K - OG

- OG: 橙色Orange RD: 红色Red BK: 黑色Black
  空白None: 绿色Green
- 表示产品安装方式 Assemble type
  - A(空): 标准型 Standard
  - B: 固定器 Fixing flange
  - C: 销钉 Mounting feet
  - D: 带卡勾 Latch
  - E: 防呆 Idiot proof
  - F: 带螺母 With nut
  - G: 开口 Open type
  - H: 凸点 Raised embossment
  - I: 带锁 With lockers
  - J: 台阶式 Setback type
  - K: 带螺丝 With screw
  - R: 反向接线 Revised insert
  - S: 小导轨 Small slide
  - T: 大导轨 Big slide
  - M: 高挂桥 Bridge
  - N: 带按钮 With press button
  - RK: 反向带螺丝With screw reversely
- 表示产品接线方式 Wiring out direction
  - C: 螺钉接线 Screw Connection
  - D: 刺破式 IDC Connection
  - P: 弹簧接线 Spring Connection
  - N: 不接线 None
- 15: 产品Pin数(接线点数) Pin No.(connection points)
- 产品出线方向(相对孔型装配方向) Wiring out direction (compared with the assembled direction of the female connector)
  - V: 垂直 Vertical Wiring
  - H: 水平 Horizontal Wiring
  - A: 带角度 Angled wiring
  - 以下代码只针对焊板型
  - SV: 垂直焊板 Vertical Solder
  - SH: 水平焊板 Horizontal Solder
- 产品间距 Pitch
- 产品流水号Product serial number: A,B,C,D,E
- 产品类型Product type: R 插头 Plug
- MC: 产品系列 MC series

MC系列固定式接线端子 MC series fixed terminal block

MC - T D 5.08 H 15 C - * - OG

- OG: 橙色Orange RD: 红色Red BK: 黑色Black
  空白None: 绿色Green
- 表示产品安装方式Assemble type
  - N/A: 标准型 Standard
  - B: 固定器 Fixing flange
  - C: 销钉 Mounting feet
  - D: 带卡勾 Latch
  - E: 防呆 Idiot proof
  - F: 带螺母 With nut
  - G: 开口型 Open type
  - H: 带锁 With lockers
  - L: 台阶式 Setback type
  - R: 反向接线 Revised insert
  - K: 带螺丝 With screw
  - S: 小导轨 Small slide
  - T: 大导轨 Big slide
  - N: 带按钮 With press button
  - RK: 反向带螺丝With screw reversely
- 表示产品接线方式 Wiring out direction
  - C: 螺钉接线 Screw Connection
  - D: 刺破式 IDC Connection
  - P: 弹簧接线 Spring Connection
  - N: 不接线 None
- 15: 产品Pin数(接线孔位) Pin No.(connection points)
- 产品出线方向(相对针型装配方向) Wiring out direction (compared with the assembled direction of the male connector)
  - V: 垂直 Vertical Wiring
  - H: 水平 Horizontal Wiring
  - A: 带角度35°出线 Angle Wiring
  - 产品焊接方式
  - SV: 垂直焊板 Vertical Solder
  - SH: 水平焊板 Horizontal Solder
- 产品间距 Pitch
- 产品流水号Product serial number: A,B,C,D,E
- 产品类型Product type: T 接线端子Terminal blocks
- MC: 产品系列 MC series

MC系列针型接线端子 MC series male connector

MC D - P A 3.81 V 15 * - F - OG

- OG: 橙色Orange RD: 红色Red BK: 黑色Black
  空白None: 绿色Green
- 表示产品安装方式 Assemble type
  - N/A: 标准型 Standard
  - B: 固定器 Fixing flange
  - C: 销钉 Mounting feet
  - D: 带卡勾 Latch
  - E: 防呆 Idiot proof
  - F: 带螺母 With nut
  - G: 开口型 Open type
  - H: 带锁 With lockers
  - L: 台阶式 Setback type
  - R: 反向接线 Revised insert
  - K: 带螺丝 With screw
  - S: 小导轨 Small slide
  - T: 大导轨 Big slide
  - N: 带按钮 With press button
  - RK: 反向带螺丝With screw reversely
- 表示产品接线方式 Wiring out direction
  - C: 螺钉接线 Screw Connection
  - D: 刺破式 IDC Connection
  - P: 弹簧接线 Spring Connection
  - N: 不接线 None
- 15: 产品Pin数(接线点数) Pin No.(connection points)
- 产品出线方向(相对针型装配方向) Wiring out direction (compared with the assembled direction of the male connector)
  - V: 垂直 Vertical Wiring
  - H: 水平 Horizontal Wiring
  - A: 带角度 Angle Wiring
  - 产品焊接方式
  - SV: 垂直焊板 Vertical Solder
  - SH: 水平焊板 Horizontal Solder
- 产品间距 Pitch
- 产品流水号Product serial number: A,B,C,D,E
- 产品类型Product type: P 插座 Receptacle
- D: 双层 Double
- MC: 产品系列 MC series

2 56 7 01

- PCB弹簧端子系列/PCB spring terminal series
- 产品类型/Product type
- 产品间距/Pitch
- 颜色，位数，通道/Color, Poles No.

标记字符 **Marked Numbers**:

可按客户要求打印字符，下表字符打印在原定货号后加后缀。

For more product information, please contact us! Can mark according to customer's request.
The number in the below list can be added following the original order No.

打印字符描述 Description of marked numbers	产品 Product	后缀 Marking
1 2 3 4 ... 23 24		K100
1 2 3 4 ... 23 24(从右到左)		K200
1 2 3 4 ... 23 24		K300
1 2 3 4 ... 23 24(从右到左)		K400
按客户要求而定 According to customers' request.		KXXX

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
2.5	4	160	MC-RJ2.5HXXP-0001	001	
2.5	4	160	MC-PA2.5HXX-0002 MC-PA2.5VXX-0002	002	
			MC-DPA2.5VXX-0002 MC-DPA2.5HXX-0002		
3.5	8	160	MC-RA3.5HXXC-0001 MC-RA3.5HXXC-K-0001 MC-RA3.5HXXC-I-0001	001	
3.5	8	160	MC-RE3.5VXXC-0001 MC-RE3.5VXXC-K-0001 MC-RE3.5VXXC-I-0001 MC-RE3.5VXXC-R-0001 MC-RE3.5VXXC-RK-0001	001	
3.5	8	160	MC-RJ3.5HXXP-0001 MC-RJ3.5HXXP-K-0001 MC-RJ3.5HXXP-I-0001	002	
3.5	10	160	MC-RJC3.5HXXP-OG-WD	003	
3.5	8	160	MC-DRD3.5HXXP MC-DRD3.5HXXP-K	003	
3.5	8	160	MC-RF3.5HXXP-0001 MC-RF3.5HXXP-K-0001 MC-RF3.5HXXP-I-0001 MC-RF3.5HXXP-D-0001	004	
3.5	8	160	MC-DRF3.5HXXP-0001 MC-DRF3.5HXXP-D-0001 MC-DRF3.5HXXP-K-0001	003	
3.5	8	160	MC-DPAN3.5VXX-BK-2600 MC-DPAN3.5VXX-D-BK-2600 MC-DPAN3.5VXX-F-BK-2600 MC-DPAN3.5HXX-BK-2600 MC-DPAN3.5HXX-D-BK-2600 MC-DPAN3.5HXX-F-BK-2600	004	
3.5	8	160	MC-PF3.5HXXP-0001 MC-PF3.5HXXP-B-0001 MC-PF3.5HXXP-D-0001 MC-PF3.5HXXP-DB-0001 MC-PF3.5HXXP-F-0001 MC-PF3.5HXXP-FB-0001 MC-PF3.5HXXP-I-0001 MC-PF3.5HXXP-IB-0001 MC-PF3.5HXXP-K-0001	005 - 006	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
3.5	8	160	MC-PA3.5VXX-0002 MC-PA3.5VXX-D-0002 MC-PA3.5VXX-F-0002 MC-PA3.5VXX-I-0002 MC-PA3.5VXX-L-0002 MC-PA3.5VXX-OG-WD MC-PA3.5HXX-0002 MC-PA3.5HXX-D-0002 MC-PA3.5HXX-F-0002 MC-PA3.5HXX-I-0002 MC-PA3.5HXX-L-0002 MC-PA3.5HXX-OG-WD	005 - 006	
3.5	8	160	MC-DRT3.5HXXP-A-0001 MC-DRT3.5HXXP-K-0001 MC-DRT3.5HXXP-I-0001	007	
3.5	8	160	MC-DPT3.5VXX-BK-2000 MC-DPT3.5VXX-F-BK-2000 MC-DPT3.5VXX-I-BK-2000 MC-DPT3.5HXX-BK-2000 MC-DPT3.5HXX-F-BK-2000 MC-DPT3.5HXX-I-BK-2000	008	
3.5	13.5	160	MC-DRG3.5HXXP-0001 MC-DRG3.5HXXP-K-0001 MC-DRG3.5HXXP-I-0001	007	
3.5	10	125	MC-DPG3.5VXX-3500 MC-DPG3.5VXX-F-3500 MC-DPG3.5VXX-I-3500 MC-DPG3.5HXX-3500 MC-DPG3.5HXX-F-3500 MC-DPG3.5HXX-I-3500	008	
3.81	8	160	MC-RA3.81HXXC-0001 MC-RA3.81HXXC-K-0001 MC-RA3.81HXXC-I-0001	009	
3.81	8	160	MC-RAF3.81HXXC-0001 MC-RAF3.81HXXC-K-0001 MC-RAF3.81HXXC-I-0001	010	
3.81	8	160	MC-RE3.81VXXC-0001 MC-RE3.81VXXC-K-0001 MC-RE3.81VXXC-I-0001 MC-RE3.81VXXC-R-0001 MC-RE3.81VXXC-RK-0001	009	
3.81	8	160	MC-RJ3.81HXXP-0001 MC-RJ3.81HXXP-K-0001 MC-RJ3.81HXXP-I-0001	010	
3.81	8	160	MC-RF3.81HXXP-0001 MC-RF3.81HXXP-K-0001 MC-RF3.81HXXP-I-0001 MC-RF3.81HXXP-D-0001	011	
3.81	8	160	MC-DRF3.81HXXP-0001 MC-DRF3.81HXXP-D-0001 MC-DRF3.81HXXP-K-0001	012	
3.81	8	160	MC-DPAN3.81VXX-BK-2600 MC-DPAN3.81VXX-D-BK-2600 MC-DPAN3.81VXX-F-BK-2600 MC-DPAN3.81HXX-BK-2600 MC-DPAN3.81HXX-D-BK-2600 MC-DPAN3.81HXX-F-BK-2600	011	
3.81	8	160	MC-RU3.81SHXX-0001 MC-RU3.81SHXX-F-0001 MC-RU3.81SVXX-0001 MC-RU3.81SVXX-F-0001	012	

www.supu.com.cn

产品目录 Product Catalogue

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
3.81	8	160	MC-PF3.81HXXP-0001 MC-PF3.81HXXP-B-0001 MC-PF3.81HXXP-D-0001 MC-PF3.81HXXP-DB-0001 MC-PF3.81HXXP-F-0001 MC-PF3.81HXXP-FB-0001 MC-PF3.81HXXP-I-0001 MC-PF3.81HXXP-IB-0001 MC-PF3.81HXXP-K-0001	013 - 014	
3.81	8	160	MC-PA3.81VXX-0002 MC-PA3.81VXX-F-0002 MC-PA3.81VXX-I-0002 MC-PA3.81VXX-L-0002 MC-PA3.81HXX-0002 MC-PA3.81HXX-F-0002 MC-PA3.81HXX-I-0002 MC-PA3.81HXX-L-0002 MC-PA3.81AXX-0002 MC-PA3.81AXX-F-0002 MC-PA3.81AXX-I-0002	013 - 014	
3.81	8	160	MC-DPA3.81VXX-0002 MC-DPA3.81VXX-F-0002 MC-DPA3.81HXX-0002 MC-DPA3.81HXX-F-0002	015	
3.81	8	160	MC-DPAB3.81VXX-0001 MC-DPAB3.81VXX-F-0001 MC-DPAB3.81VXX-I-0001 MC-DPAB3.81HXX-0001 MC-DPAB3.81HXX-F-0001 MC-DPAB3.81HXX-I-0001	016	
3.81	8	160	MC-PB3.81HXXC-0001 MC-PB3.81HXXC-B-0001 MC-PB3.81HXXC-F-0001 MC-PB3.81HXXC-FB-0001 MC-PB3.81HXXC-I-0001 MC-PB3.81HXXC-IB-0001 MC-PB3.81HXXC-K-0001 MC-PB3.81HXXC-KB-0001	015 - 016	
5.0	18	320	MC-RB5.0HXXC-0001 MC-RB5.0HXXC-K-0001 MC-RB5.0HXXC-I-0001	017	
5.0	18	320	MC-RBT5.0HXXC-0001 MC-RBT5.0HXXC-K-0001 MC-RBT/T5.0HXXC-0001 MC-RBT/T5.0HXXC-K-0001	018	
5.0	12	320	MC-RE5.0VXXC-0001 MC-RE5.0VXXC-K-0001 MC-RE5.0VXXC-I-0001 MC-RE5.0VXXC-R-0001 MC-RE5.0VXXC-RK-0001	017	
5.0	12	320	MC-RJ5.0HXXP-0001 MC-RJ5.0HXXP-K-0001 MC-RJ5.0HXXP-I-0001 MC-RJ5.0HXXP-D-0001	018	
5.0	18	320	MC-PA5.0VXX-0002 MC-PA5.0VXX-D-0002 MC-PA5.0VXX-F-0002 MC-PA5.0VXX-G-0002 MC-PA5.0VXX-I-0002 MC-PA5.0HXX-0002 MC-PA5.0HXX-D-0002 MC-PA5.0HXX-F-0002 MC-PA5.0HXX-G-0002 MC-PA5.0HXX-I-0002	019	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.0	10	320	MC-DPA5.0HXX-0002 MC-DPA5.0HXX-F-0002 MC-DPA5.0VXX-0002 MC-DPA5.0VXX-F-0002	019	
5.0	12	320	MC-PAL5.0H02-0002 MC-PAL5.0H03-0002 MC-PAL5.0H04-0002	020	
			MC-PAR5.0H02-0002 MC-PAR5.0H03-0002 MC-PAR5.0H04-0002		
5.0	20	320	MC-ROX5.0HXXP-0001 MC-ROY5.0HXXP-0001	021	
5.0	15	320	MC-ROX5.0HXXP-0002	021	
5.0	15	320	MC-POX5.0HXX-0001 MC-POY5.0HXX-0001	022	
5.0	15	320	MC-POX5.0HXX-0002	022	
5.08	8	320	MC-RA5.08HXXC-0001 MC-RA5.08HXXC-K-0001 MC-RA5.08HXXC-I-0001	021	
5.08	18	320	MC-RB5.08HXXC-0001 MC-RB5.08HXXC-K-0001 MC-RB5.08HXXC-I-0001	022	
5.08	12	320	MC-RB5.08HXXB-0001 MC-RB5.08HXXB/100-0001 MC-RB5.08HXXB-I-0001 MC-RB5.08HXXB-I/100-0001 MC-RB5.08HXXB-K-0001 MC-RB5.08HXXB-K/100-0001	023	
5.08	18	320	MC-RBF5.08HXXC-0001 MC-RBF5.08HXXC-K-0001 MC-RBF5.08HXXC-I-0001	024	
5.08	5	320	MC-RB5.08-03-3000	023	
	10		MC-RB5.08-10-3000		
	12		MC-RB5.08-25-3000		
5.08	12	320	MC-RE5.08VXXC-0001 MC-RE5.08VXXC-K-0001 MC-RE5.08VXXC-I-0001 MC-RE5.08VXXC-R-0001 MC-RE5.08VXXC-RK-0001	024	
5.08	12	320	MC-RN5.08VXXP-0001 MC-RN5.08VXXP-K-0001 MC-RN5.08VXXP-R-0001 MC-RN5.08VXXP-RK-0001	025	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.08	12	320	MC-RJ5.08HXXP-0001 MC-RJ5.08HXXP-D-0001 MC-RJ5.08HXXP-I-0001 MC-RJ5.08HXXP-K-0001	026	
5.08	12	320	MC-RJT5.08HXXP-0001 MC-RJT5.08HXXC-K-0001	025	
5.08	12	320	MC-DRJ5.08HXXP-0001 MC-DRJ5.08HXXP-K-0001 MC-DRJ5.08HXXP-I-0001	027	
5.08	18	320	MC-RP5.08HXXP-0001 MC-RP5.08HXXP-K-0001 MC-RP5.08HXXP-I-0001	028	
5.08	12	300	MC-PJ5.08HXXP-0001 MC-PJ5.08HXXP-B-0001 MC-PJ5.08HXXP-D-0001 MC-PJ5.08HXXP-DB-0001 MC-PJ5.08HXXP-F-0001 MC-PJ5.08HXXP-I-0001 MC-PJ5.08HXXP-K-0001	027 - 028	
5.08	18	320	MC-PA5.08HXX-0002 MC-PA5.08HXX-D-0002 MC-PA5.08HXX-F-0002 MC-PA5.08HXX-G-0002 MC-PA5.08HXX-I-0002 MC-PA5.08VXX-0002 MC-PA5.08VXX-D-0002 MC-PA5.08VXX-F-0002 MC-PA5.08VXX-G-0002 MC-PA5.08VXX-I-0002	029 - 030	
5.08	12	320	MC-PB5.08HXXC-0001 MC-PB5.08HXXC-B-0001 MC-PB5.08HXXC-F-0001 MC-PB5.08HXXC-FB-0001 MC-PB5.08HXXC-I-0001 MC-PB5.08HXXC-IB-0001 MC-PB5.08HXXC-K-0001 MC-PB5.08HXXC-KB-0001 MC-PB5.08HXXC-S-0001 MC-PB5.08HXXC-SF-0001 MC-PB5.08HXXC-SI-0001 MC-PB5.08HXXC-SK-0001	029 - 030	
5.08	8	320	MC-PD5.08HXX-0001 MC-PD5.08HXX-F-0001 MC-PD5.08HXX-I-0001 MC-PD5.08VXX-0001 MC-PD5.08VXX-F-0001 MC-PD5.08VXX-I-0001	031	
5.08	10	320	MC-DPA5.08HXX-0002 MC-DPA5.08HXX-F-0002 MC-DPA5.08VXX-0002 MC-DPA5.08VXX-F-0002	032	
5.08	10	320	MC-DPAB5.08HXX-0001 MC-DPAB5.08HXX-F-0001 MC-DPAB5.08HXX-G-0001 MC-DPAB5.08HXX-I-0001 MC-DPAB5.08VXX-0001 MC-DPAB5.08VXX-F-0001 MC-DPAB5.08VXX-G-0001 MC-DPAB5.08VXX-I-0001	031 - 032	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.08	16	320	MC-RU5.08SHXX-0001 MC-RU5.08SHXX-F-0001 MC-RU5.08SVXX-0001 MC-RU5.08SVXX-F-0001	033	
5.08	12	320	MC-RH5.08HXXC-B-0001 MC-RH5.08HXXC-T-0001	034	
7.5	18	630	MC-RB7.5HXXC-0001 MC-RB7.5HXXC-K-0001 MC-RB7.5HXXC-I-0001	033	
7.5	18	630	MC-RE7.5VXXC-0001 MC-RE7.5VXXC-K-0001 MC-RE7.5VXXC-I-0001 MC-RE7.5VXXC-R-0001 MC-RE7.5VXXC-RK-0001	034	
7.5	12	630	MC-RJ7.5HXXP-0001 MC-RJ7.5HXXP-K-0001 MC-RJ7.5HXXP-I-0001	035	
7.5	18	630	MC-PA7.5HXX-0002 MC-PA7.5HXX-F-0002 MC-PA7.5HXX-G-0002 MC-PA7.5HXX-I-0002 MC-PA7.5VXX-0002 MC-PA7.5VXX-F-0002 MC-PA7.5VXX-G-0002 MC-PA7.5VXX-I-0002	035 - 036	
7.5	20	630	MC-ROX7.5HXXP-0001 MC-ROY7.5HXXP-0001	037	
7.5	15	630	MC-POX7.5HXX-0001 MC-POY7.5HXX-0001	038	
7.62	18	630	MC-RB7.62HXXC-0001 MC-RB7.62HXXC-K-0001 MC-RB7.62HXXC-I-0001	037	
7.62	18	630	MC-RE7.62VXXC-0001 MC-RE7.62VXXC-K-0001 MC-RE7.62VXXC-I-0001 MC-RE7.62VXXC-R-0001 MC-RE7.62VXXC-RK-0001	038	
7.62	12	630	MC-RJ7.62HXXP-0001 MC-RJ7.62HXXP-K-0001 MC-RJ7.62HXXP-I-0001	038	
7.62	18	630	MC-PA7.62HXX-0002 MC-PA7.62HXX-F-0002 MC-PA7.62HXX-G-0002 MC-PA7.62HXX-I-0002 MC-PA7.62VXX-0002 MC-PA7.62VXX-F-0002 MC-PA7.62VXX-G-0002 MC-PA7.62VXX-I-0002	039 - 040	

www.supu.com.cn

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
7.62	12	630	MC-PB7.62HXXC-0001 MC-PB7.62HXXC-F-0001 MC-PB7.62HXXC-K-0001 MC-PB7.62HXXC-I-0001 MC-PB7.62HXXC-B-0001 MC-PB7.62HXXC-FB-0001 MC-PB7.62HXXC-KB-0001 MC-PB7.62HXXC-IB-0001	039 - 040	
7.62	41	1000	MC-RH7.62HXXC-0001 MC-RH7.62HXXC-K-0001	041	
7.62	41	1000	MC-RQ7.62HXXP-0001 MC-RQ7.62HXXP-K-0001	041	
7.62	20	630	MC-RH7.62HXX-0001 MC-RH7.62HXX-K-0001	041	
7.62	41	1000	MC-PQ7.62HXXP-0001 MC-PQ7.62HXXP-F-0001 MC-PQ7.62HXXP-B-0001 MC-PQ7.62HXXP-I-0001	042	
7.62	20	630	MC-PH7.62HXX-0001 MC-PH7.62HXX-F-0001 MC-PH7.62VXX-0001 MC-PH7.62VXX-F-0001	042	
7.62	41	630	MC-PHH7.62HXX-0001 MC-PHH7.62HXX-I-0001 MC-PHH7.62HXX-F-0001 MC-PHH7.62HXX-F-0030 MC-PHH7.62VXX-0001 MC-PHH7.62VXX-I-0001 MC-PHH7.62VXX-F-0001 MC-PHH7.62VXX-F-0030	043 - 044	
10.16	76	1000	MC-RHH10.16HXXC-0001 MC-RHH10.16HXXC-K-0001	43	
10.16	76	1000	MC-PH10.16HXX-0001 MC-PH10.16HXX-F-0001 MC-PH10.16VXX-0001 MC-PH10.16VXX-F-0001	044	
2.54	6	130	MC-TC2.54HXXP-N-0001 MC-TC2.54VXXP-N-0001	045	
3.5	17.5	200	MC-TI3.5HXXP-BK-0001 MC-TI3.5HXXP-BK-1600 MC-TI3.5VXXP-BK-0001 MC-TI3.5VXXP-BK-1600	046	
3.5	17.5	160	MC-TI3.5HXXP-BK-0001-SMT MC-TI3.5VXXP-BK-0001-SMT	046	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
3.81	8	160	MC-TM3.81HXXC-0001	046	
3.81	8	160	MC-DTM3.81HXXC-0001	047	
3.81	8	160	MC-TTM3.81HXXC-0001	047	
3.81	10	200	MC-TM3.81BXXC-0001	047	
3.81	12	160	MC-TE3.81HXXC-0001	047	
3.81	12	160	MC-TEH3.81HXXC-0001	047	
3.81	12	160	MC-DTEH3.81HXXC-0001	048	
5.0	17.5	320	MC-TI5.0HXXP-BK-0001 MC-TI5.0HXXP-BK-1600 MC-TI5.0VXXP-BK-0001 MC-TI5.0VXXP-BK-1600	048	
5.0	17.5	320	MC-TI5.0HXXP-BK-0001-SMT MC-TI5.0VXXP-BK-0001-SMT	048	
5.0	14	320	MC-TE5.0HXXC-0001	049	
5.0	13.5	320	MC-TEH5.0HXXC-0001	049	
5.0	14	320	MC-DTE5.0HXXC-0001	049	
5.0	24	400	MC-TD5.0HXXC-0001	049	
5.0	24	400	MC-TD5.0AXXC-0001	049	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.0	24	400	MC-DTD5.0HXXC-0001	050	
5.0	24	400	MC-TF5.0HXXC-0001	050	
5.0	24	400	MC-TF5.0AXXC-0001	050	
5.0	24	400	MC-DTF5.0HXXC-0001	050	
5.0	24	320	MC-TC5.0VXXP-N-GY-0001	050	
5.0	24	320	MC-TC5.0VXXP-0001 MC-TC5.0HXXP-0001	051	
5.0	17.5	320	MC-TP/B5.0AXXP-BK-0001 MC-TP/F5.0AXXP-BK-0001 MC-DTP5.0AXXP-BK-0001 MC-TTP5.0AXXP-BK-0001 MC-FTP5.0AXXP-BK-0001	051	
5.08	10	320	MC-TX5.08VXXP-0001	051	
5.08	20	320	MC-TC5.08AXXP-0001	052	
5.08	20	320	MC-DTC5.08AXXP-0001	052	
5.08	14	320	MC-TE5.08HXXC-0001	052	
5.08	13.5	320	MC-TEH5.08HXXC-0001	052	
5.08	17.5	320	MC-TE5.08AXXC-0001	052	
5.08	13.5	400	MC-TE5.08BXXC-0001	053	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.08	14	320	MC-DTE5.08HXXC-0001	053	
5.08	24	400	MC-TD5.08HXXC-0001	053	
5.08	24	400	MC-TD5.08AXXC-0001	053	
5.08	24	400	MC-DTD5.08HXXC-0001	053	
5.08	24	400	MC-TTD5.08HXXC-0001	054	
5.08	24	400	MC-TF5.08HXXC-0001	054	
5.08	24	400	MC-TF5.08AXXC-0001	054	
5.08	20	400	MC-TF5.08CXXC-0001	054	
5.08	24	400	MC-DTF5.08HXXC-0001	054	
5.08	24	400	MC-TTF5.08HXXC-0001	055	
5.08	15	400	MC-TC5.08VXXP-N-0001	055	
6.35	32	630	MC-TTF6.35HXXC-0001	055	
6.35	41	1000	TH/F6.35HXXC-0001	055	
7.5	32	630	MC-TH7.5HXXC-0001	055	

www.supu.com.cn

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
7.5	41	1000	MC-TC7.5HXXP-0001 MC-TC/B7.5HXXP-0001(W针脚) TC/B7.5HXXP-0001(M针脚) MC-TC7.5VXXP-0001 MC-TC/F7.5VXXP-0001（W针脚) MC-TC/F7.5VXXP-0001（M针脚)	056	
7.62	15	630	MC-TC7.62VXXP-N-0001	056	
7.62	24	630	MC-TD7.62HXXC-0001	056	
7.62	24	630	MC-TF7.62HXXC-0001	056	
7.62	32	630	MC-TG7.62HXXC-0001	057	
9.52	32	1000	MC-TG9.52HXXC-0001	057	
9.52	32	1000	MC-TH9.52HXXC-0001	057	
9.52	32	1000	MC-TH/F9.52HXXC-0001	057	
10.16	57	1000	MC-TJ10.16HXXC-0001	057	
10.16	76	1000	MC-TH10.16HXXC-0001 MC-TH/B10.16H01C-0001 MC-TH/F10.16H01C-0001	058	
15	125	1000	MC-TK15HXXC-0001 MC-TK15HXXC-B-0001 MC-TK15H01C-BL-0001 MC-TK15H01C-BR-0001	058	
5.0	17.5	320	2352XX/010 2352XX	059	
7.5	17.5	630	2353XX/010 2353XX	059	
10.0	17.5	1000	2354XX/010 2354XX	059	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
3.5	17.5	160	2393XX/010 2393XX	059	
5.0	24	320	2391XX	059	
7.5	24	630	2392XX	060	
5.08	24	320	23915X	060	
7.62	24	630	23925X	060	
5.0	32	320	2452XX/020 2452XX	060	
7.5	32	630	2453XX/020 2453XX	060	
10.0	32	1000	2454XX/020 2454XX	061	
7.5	41	630	2463XX/020 2463XX	061	
10.0	41	1000	2464XX/020 2464XX	061	
3.5	8	160	2501XX 2502XX	061	
5.0	10	320	2505XX	061	
5.0	24	320	2554XX	062	
7.5	24	630	2555XX	062	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.0	24	320	2563XX 2567XX	062	
7.5	24	320	2564XX 2568XX	062	
10.0	24	1000	2569XX	062	
5.0	21	320	2572XX	063	
7.5	21	630	2573XX	063	
10.0	21	1000	2574XX	063	
5.0	21	320	2582XX	064	
7.5	21	630	2583XX	064	

www.supu.com.cn

MCS多用途弹簧连接器
MCS Series Connectors with Spring-cage Clamp

该系列产品采用通用型笼式弹簧接线技术，导线无需预处理。可实现线到板、线到线、板到线、板到板之间的电力和信号传输，可提供销钉固定、卡接、螺钉固定等多种固定方式，产品已通过UL、TUV、CE、CQC认证。

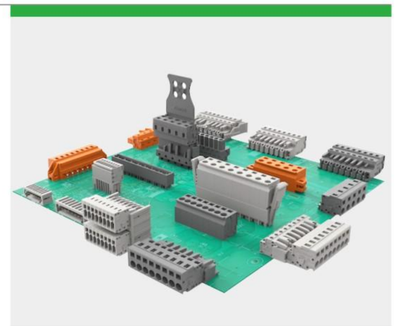

MCS多用途弹簧连接器选型编码
MCS Series Connectors with Spring-cage Clamp coding rule

4 50 2 02 / 0 1 1 - 00 D

- A-Z: 表示延伸产品识别码 The coding for the extended parts
- 00-99: 表示产品规格延伸（见附表一） The extended parts
- 0-9: 表示喷码样式 Printing type
- 0-9: 表示结构特性 Structure feature
  - 1: 带固定器 With fixing flange
  - 2: 开口型 Open type
  - 3: 带销钉 With mounting feet
  - 5: 带卡接钩 With latch
  - 6: 穿墙固定器 With wall-through fixing flange
- 0-9: 表示护线板类型 Protection plate type
- 00-99: 表示位数结合前面四位数 Poles number ,combine with the four numbers ahead
  - 02~24 2-24位
  - 52~74 2-24位
- 0-9: 表示产品类型 Products type
  - 1.孔型连接器 Female connector
  - 2.直型焊针插座 Straight pin socket
  - 3.弯型焊针插座 angled pin socket
  - 4.针型连接器 Male connector
  - 6.孔型连接器-防反插 Female connector protected against mismating
  - 7.直型焊针插座-防反插 Straight pin socket protected against mismating
  - 8.弯型焊针插座-防反插 Angled pin socket protected against mismating
  - 9.针型连接器-防反插 Male connector protected against mismating
  - 5.护线盒等附件 Accessories including relief housing
- 00-99: 表示间距 Pitch
  - 25: 2.5mm 38: 3.81mm 58: 5.08mm 78: 7.62mm
  - 35: 3.5mm 50: 5.0mm 75: 7.5mm
- 4: 弹簧连接器系列 Spring cage connector series

页码/Page: **65-88**

00 00-99: 表示产品规格延伸（附表一） The extended parts

代码	含义
00	带接地加长针(适用于3位、4位、5位中间一位用长针) With lengthened grounding pin (applied in 3pole, 4pole, 5pole, the middle one is the lengthened pin)
01	带焊针(3.8mm) With solder pin 3.8mm
02	带焊针(3.8mm)，带接地加长针 With solder pin 3.8mm, the lengthened grounding pin
03	焊针尺寸1.2*1.2mm，长度3.8mm，带接地加长针 With solder pin 1.2*1.2mm, pin length 3.8mm, the lengthened grounding pin
04	焊针尺寸1.2*1.2mm，长度3.8mm With solder pin 1.2*1.2mm, pin length 3.8mm
05	焊针尺寸1.2*1.2mm，带接地加长针 With solder pin 1.2*1.2mm, the lengthened grounding pin
06	焊针尺寸1.2*1.2mm With solder pin 1.2*1.2mm
...	...

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
2.5	4	160	4251XX 4251XX/050	069	
2.5	4	160	4252XX 4253XX	070	
2.5	4	160	4254XX	070	
3.5	10	160	4351XX 4351XX/010 4351XX/050	069	
3.5	10	160	4352XX 4352XX-01D 4353XX 4358XX	070	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
3.5	10	160	4354XX 4354XX/010	071	
3.5	10	160	4355XX 4355XX/030	072	
3.81	10	160	4381XX 4381XX/050	071	
3.81	10	160	4382XX 4383XX	072	
3.81	10	160	4384XX 4384XX/010	071	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.0	12	320	4501XX 4501XX/010 4501XX/030 4501XX/050	072	
5.0	12	320	4502XX 4502XX/110 4502XX-01D 4502XX-03D 4502XX-04D 4502XX-05D 4502XX-06D 4503XX 4503XX/00D 4503XX-03D 4503XX-04D	073	
5.0	12	320	4504XX 4504XX/010 4504XX/030 4504XX/060	073	
5.0	12	320	45015X 45015X/010 45015X/030	074	
5.0	12	320	45025X 45025X/110 45035X	075	
5.0	12	320	45046X 45046X/010 45043X 45043X/010	076	
5.0	12	320	4506XX 4506XX/010 4506XX/030 4506XX/050	075	
5.0	12	320	4509XX 4509XX/010 4509XX/030 45043X/010	076	
5.0	12	320	4507XX 4507XX/110 4507XX-00D 4507XX-01D 4507XX-03D 4507XX-04D 4507XX-05D 4507XX-06D 4508XX	077	
5.0	12	320	45065X 45065X/010 45065X/030	077	
5.0	12	320	45075X 45075X/110 45085X	078	
5.08	12	320	4581XX 4581XX/010 4581XX/030 4581XX/050	079	
5.08	12	320	4582XX 4582XX-01D 4583XX 4583XX-00D	080	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
5.08	12	320	4584XX 4584XX/010 4584XX/030 4584XX/060	079	
5.08	12	320	45825X 45835X	080	
5.08	12	320	45846X 45846X/010 45843X 45843X/010	081	
7.5	16	500	4751XX 4751XX/010 4751XX/030 4751XX/050	082	
7.5	12	500	4752XX 4752XX-03D 4752XX-04D 4752XX-05D 4752XX-06D 4753XX 4753XX-03D 4753XX-04D	081	
7.5	16	500	4754XX 4754XX/010 4754XX/030 4754XX/060	083	
7.5	16	500	47525X 47535X	084	
7.5	16	500	47546X 47546X/010 47543X 47543X/010	083	
7.5	16	500	4756XX 4756XX/010 4756XX/030 4756XX/050	084	
7.5	12	500	4757XX 4757XX-00D 4757XX-02D 4757XX-03D 4757XX-04D 4757XX-06D 4758XX-06D	085	
7.5	16	500	4759XX 4759XX/010 4759XX/030 4759XX/060	085	
7.5	16	500	47575X 47585X	086	

www.supu.com.cn

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
7.62	16	500	4781XX 4781XX/010 4781XX/030 4781XX/050	087	
7.62	16	500	4782XX 4782XX-04D 4782XX-06D 4783XX 4783XX-04D	088	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
7.62	16	500	4784XX 4784XX/010 4784XX/030 4784XX/060	087	
7.62	16	500	47846X 47846X/010 47843X 47843X/010	088	

栅栏式接线端子

Barrier terminal block

该款产品涵盖多个系列，多种规格，分为焊接式，贯穿式，中继式；客户可根据应用需求实现线到线，线到板多种的布线方式；产品最大可支持到1000V电压，最大电流可满足到180A；适用于设备及柜内安装，特别支持大功率应用，广泛应用在光伏与新能源行业。

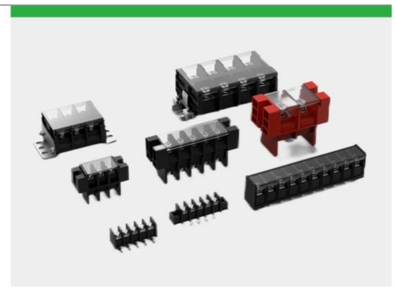

页码/Page: **89-92**

焊接式与贯穿式

订货号规则/Order number rule

TB /B 5 - K - 9.52 V 06C - 50 - X - 001

- 001：产品流水码 Product serial number
  001标准品Standard　002定制品customized
- X：颜色 Colour
  N/A 黑色 black　RD红色 red
- 50：焊脚长度 Pin length
- 06C：产品Pin数(接线位)Pin No.(connection points)
- V：产品出线方向
  V:垂直 Vertical Wiring　H:水平 Horizontal Wiring
- 9.52：产品间距 Pitch
- K：固定方式Fixed mode
  N/A
  K两侧塑料螺丝孔Plastic screw hole
  B两侧金属固定器Metal holder
- 5：小系列号Minor series number
  N/A
  4,5,6 ,8,9
- /B：焊脚类型 Pin type
  N/A
  /F单排前出脚Single row front exit foot
  /C单排中间出脚Single row center exit foot
  /B单排后出脚Single row back out foot
  /W单排中间出宽脚Single row middle out wide feet
  /ZF双排前出脚Double row front exit feet
  /ZB双排后出脚Double row back exit foot
  /D双排出脚Double discharge pin
- TB：产品类型 Product type
  TB：单层Single layer　DTB:双层 Double layer

中继式

订货号规则/Order number rule

TBR 80 - 06C - B - 001

- 001：产品流水码 Product serial number
  001标准品Standard　002定制品customized
- B：固定方式Mounting
  导轨式（Rail type）　螺钉安装（Screw mounting）
- 06C：产品Pin数(接线位)Pin No.(connection points)
- 80：额定电流 Rated current
- TBR：产品类型 Product type

间距 Pitch [mm]	IEC额定电流 IEC Rated current [A]	IEC额定电压 IEC Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
9.52	32	630	TB/B5-9.52VXXC-50-001 TB/B5-K-9.52VXXC-50-001	089	
9.52	32	630	TB/B6-9.52VXXC-50-001 TB/B6-9.52HXXC-50-001	089	
9.52	32	630	TB/W5-9.52VXXC-125-001 TB/W5-K-9.52VXXC-125-001	089	
9.52	32	630	TB/C5-9.52VXXC-50-001 TB/C5-K-9.52VXXC-50-001	090	
9.52	32	630	TB/C5-9.52HXXC-50-001 TB/C5-K-9.52HXXC-50-001	090	
14.5	76	1000	TBD-14.5VXXC-40-101	090	

间距 Pitch [mm]	UL额定电流 UL Rated current [A]	UL额定电压 UL Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
13.0	40	600	TB-K-13.0VXXC-001	090	
16.0	75	600	TB-K-16.0VXXC-001	090	
21.0	100	600	TB-K-21.0VXXC-001	091	
27.0	180	600	TB-K-27.0VXXC-001	091	
27.0	180	600	TB-K-27.0V02C-RD-002	091	
19.0	80	600	TBR80-XXC-LR-001 TBR80-XXC-B-001	091	
25.0	101	600	TBR100-XXC-LR-001 TBR100-XXC-B-001	092	
27.0	150	600	TBR150-XXC-LR-001 TBR150-XXC-B-001	092	
	100	600	TBR100-01P-GR-0002	092	

B系列冷压式孔型/针型连接器
Series B Connectors With Male/Female Furrule

B系列冷压式孔型/针型连接器，此类产品与导线的连接器采用机械冷压连接，相互对插采用金属弹性插接连接，也可以直接焊接于PCB板之上，操作所需工具简单，使用方便，接线密度高。广泛应用于各种需要高密度电力和信号连接的位置。产品设计制造符合IEC/EN61984、UL1977等国际标准，并通过TUV、CE认证。

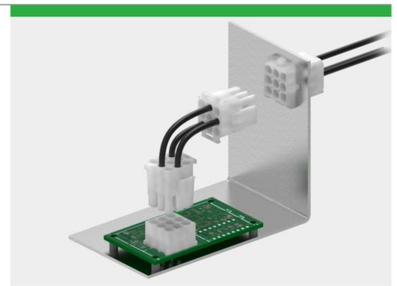

页码/Page: **93-94**

订货号规则/**Order number rule**

BL 635 V 33 F - WT - 00 0 0

- 产品类型Product type
- 位间距Pitch
- 针类型Pin type
- 位数Poles No.
- 针型//孔型Male/Female
- 颜色Color
- 防呆码The foolproof code
- 阻燃等级Flammability rating
- 标准Standard

金属件订货号规则
Metallic parts order number rule

BL 635 V 30 F - 03 - 20 0 0

- 产品类型Product type
- 位间距Pitch
- 针类型Pin type
- 包装数量Packing unit
- 针型//孔型Male/Female
- 镀层Plating
- 接线范围Wire range
- 包装类型Packing type
- 材料Material

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
6.35	12	600	BL635VXXF-WT-0000 BL635VXXF-WT-0000 BL635VXXM-WT-0000 BL635VXXM-WT-0000	093	
6.35	12	600	BP635VXXM-WT-0000 BP635VXXM-WT-0000 BP635VXXF-WT-0000 BP635VXXF-WT-0000	093	
	12	600	BL635V30M-03-2000	093	
	12	600	BL635V30F-03-2000	093	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
	12	600	BL635V30M-03-0800	093	
	12	600	BL635V30F-03-0800	093	
6.35	12	600	BL635V34F-WT-0000-XX BL635V34M-WT-0000-XX	094	

变压器专用端子
Transformer Terminal Blocks

变压器专用端子专门针对变压器的接线和类似接线应用而设计的接线端子。结构设计兼顾了变压器接线中接线方便和接线牢固的需求，可以快速的安装在2x10mm的导轨上。产品设计制造符合IEC/EN60998、UL1059等国际标准，并通过CQC、UL、VDE、CE认证。

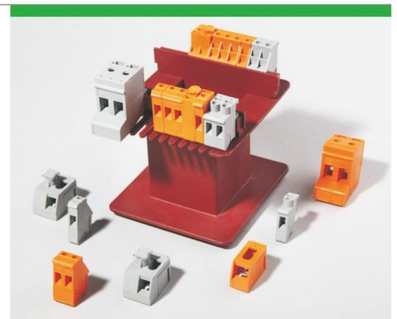

页码/Page: **95-98**

订货号规则/**Order number rule**

6 20 1 1 1

- 变压器专用端子/Transformer terminal blocks
- 产品类型/Product type
- 产品特征/Features
- 产品结构/Product structure
- 产品颜色/Color

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
	32	600	620111 620112	095	
	24	600	620121 620122	095	
	10	600	620151 620152	095	
	32	600	620171 620172	095	
	32	600	620181 620182	095	
	10	600	620161 620162	095	
	32	600	620211 620212 620213 620217	096	
	32	600	620221 620222 620223 620227	096	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
	32	600	620231 620232 620233 620237	096	
	10	600	620251 620252 620253 620257	0966	
	57	750	620521 620522	096	
	57	750	620531 620532	096	
	10	600	620261 620262	097	
	32	600	620411 620412	097	
	32	600	620421 620422	097	
	32	600	620611 620612	097	

大电流穿墙端子
Panel feed-through terminal block with high current

该系列产品采用压线框螺钉接线技术，客户可根据应用需求选择不同的接线方向，可节约大量的安装空间，并适用于各种安装位置，可连接0.5至50mm²所有类型导线。

页码/Page: **99-100**

订货号规则/**Order number rule**

SCWH X S

系列/Series
接线容量/Wire range
带柱子/With pillars

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
	41	500	SCWH4 SCWH4S	099	
	76	500	SCWH10 SCWH10S	099	

间距 Pitch [mm]	额定电流 Rated current [A]	额定电压 Rated voltage [V]	订货号 Order No.	页码 Page	例图 Picture
	76	800	SCWH16 SCWH16S	099	
	101	800	SCWH25 SCWH25S	099	

附件
Accessory

页码/Page: **101-104**

插拔式端子附件 Pluggable terminal block accessory

护线板 Protection plate	101		防错插片 Coding profile	101	
护线盒 Relief housing	101				
跨接桥 Jumper	101				

MCS连接器附件 MCS connector accessory

护线板 Protection plate	102		护线盒 Relief housing	102	
护线盒 Relief housing	102				

跨接桥 Jumper	102		拨码元件 Coding key	103	

MCS连接器附件 MCS connector accessory

跨接桥 Jumper	102		标记字符 Marked Numbers	103	

大电流穿墙端子附件 Panel feed-through terminal block with high current accessory

法兰板 Flange plates	103		标记牌 Marker card	103		跨接桥 Jumper	103

变压器专用端子附件 Transformer terminal blocks accessory

变压器固定器 Transformer End stop	104		变压器标记牌 Transformer Marker card	104	

弹簧接线端子专用工具 Special tools for spring terminal blocks

简易连线工具 Easy connect tool	104		一字螺丝刀 Screwdriver	104	
插棒 connect bar	104				

www.supu.com.cn

2.5mm间距 Pitch: 2.5mm

MC-RJ2.5HXXP-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	4
额定电压 Rated voltage	[V]	160	125
硬导线截面积 Solid	[mm²][AWG]	0.2-0.5	28-20
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.5	28-20
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order No./Poles No.	
MC-RJ2.5HXXP-0001	2-24

附件Accessory	



3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order No./Poles No.	
MC-RA3.5HXXC-0001	2-24
MC-RA3.5HXXC-K-0001	2-24
MC-RA3.5HXXC-I-0001	2-24

附件Accessory	

MC-RA3.5HXXC-0001



MC-RA3.5HXXC-K-0001

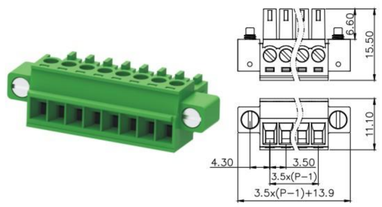

MC-RA3.5HXXC-I-0001



3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order No./Poles No.	
MC-RE3.5VXXC-0001	2-24
MC-RE3.5VXXC-K-0001	2-24
MC-RE3.5VXXC-I-0001	2-24
MC-RE3.5VXXC-R-0001	2-24
MC-RE3.5VXXC-RK-0001	2-24

附件Accessory	

MC-RE3.5VXXC-0001



MC-RE3.5VXXC-K-0001

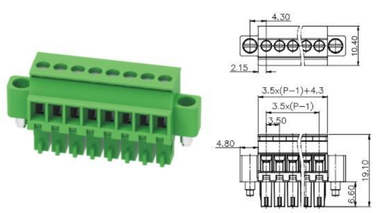

MC-RE3.5VXXC-I-0001



MC-RE3.5VXXC-R-0001



MC-RE3.5VXXC-RK-0001

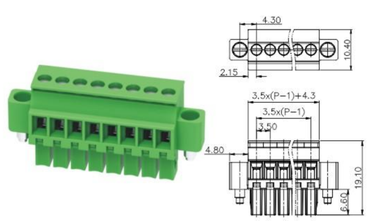

2.5mm间距 Pitch: 2.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	4
额定电压 Rated voltage	[V]	160	125
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order No./Poles No.	
MC-PA2.5HXX-0002	2-24
MC-PA2.5VXX-0002	2-24
MC-DPA2.5VXX-0002	4-48
MC-DPA2.5HXX-0002	4-48

附件Accessory	

MC-PA2.5VXX-0002

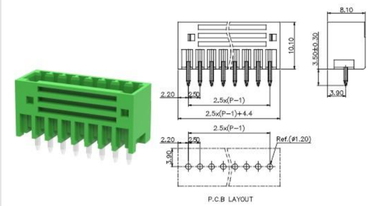

MC-PA2.5HXX-0002

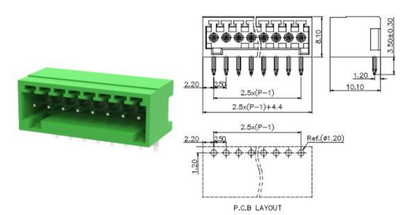

MC-DPA2.5VXX-0002

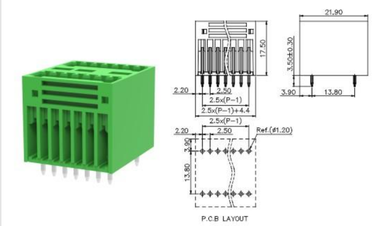

MC-DPA2.5HXX-0002

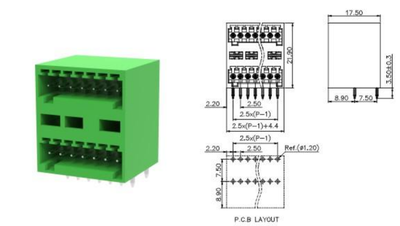

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	3
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order No./Poles No.	
MC-RJ3.5HXXP-0001	2-24
MC-RJ3.5HXXP-K-0001	2-24
MC-RJ3.5HXXP-I-0001	2-24

附件Accessory	

MC-RJ3.5HXXP-0001



MC-RJ3.5HXXP-K-0001



MC-RJ3.5HXXP-I-0001

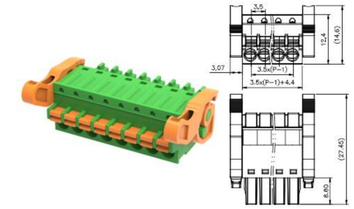

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order No./Poles No.	
MC-RJC3.5HXXP-OG-WD	2-24

附件Accessory	

MC-RJC3.5HXXP-OG-WD



3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	9-10

订货号/通道数 Order No./Poles No.	
MC-DRD3.5HXXP	4-20
MC-DRD3.5HXXP-K	4-20

附件Accessory	

MC-DRD3.5HXXP-0001

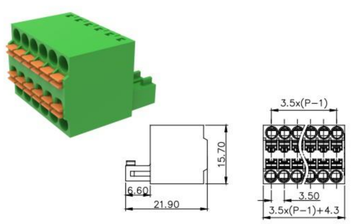

MC-DRD3.5HXXP-K-0001

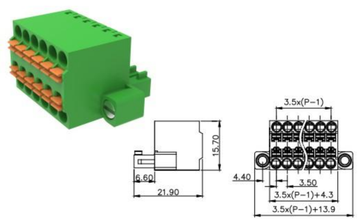

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10

订货号/通道数 Order No./Poles No.	
MC-DRF3.5HXXP-0001	2-24
MC-DRF3.5HXXP-D-0001	2-24
MC-DRF3.5HXXP-K-0001	2-24

附件Accessory	

MC-DRF3.5HXXP-0001

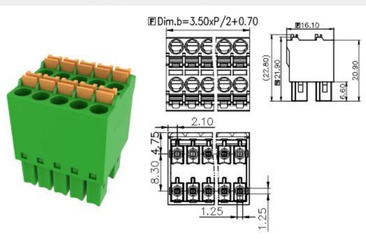

MC-DRF3.5HXXP-D-0001

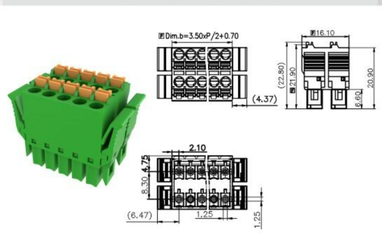

MC-DRF3.5HXXP-K-0001

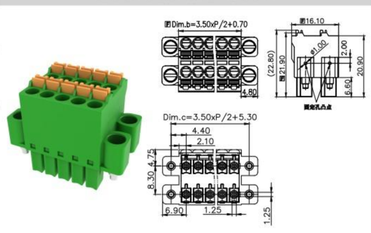

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10

订货号/通道数 Order No./Poles No.	
MC-RF3.5HXXP-0001	2-24
MC-RF3.5HXXP-K-0001	2-24
MC-RF3.5HXXP-I-0001	2-24
MC-RF3.5HXXP-D-0001	2-24

附件Accessory	

MC-RF3.5HXXP-0001

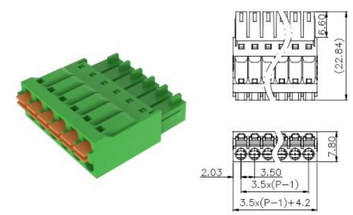

MC-RF3.5HXXP-K-0001



MC-RF3.5HXXP-I-0001

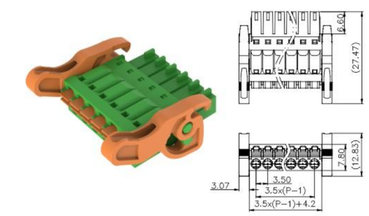

MC-RF3.5HXXP-D-0001

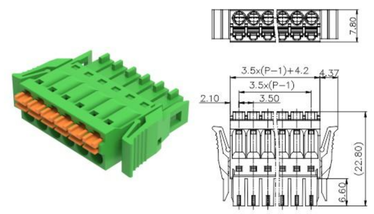

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order No./Poles No.	
MC-DPAN3.5VXX-BK-2600	4-48
MC-DPAN3.5VXX-D-BK-2600	4-48
MC-DPAN3.5VXX-F-BK-2600	4-48
MC-DPAN3.5HXX-BK-2600	4-48
MC-DPAN3.5HXX-D-BK-2600	4-48
MC-DPAN3.5HXX-F-BK-2600	4-48

附件Accessory	

MC-DPAN3.5VXX-BK-2600



MC-DPAN3.5VXX-D-BK-2600

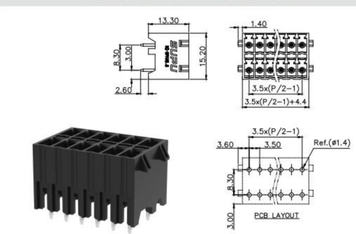

MC-DPAN3.5VXX-F-BK-2600

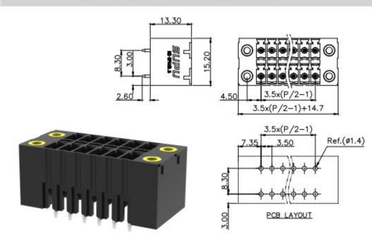

MC-DPAN3.5HXX-BK-2600



MC-DPAN3.5HXX-D-BK-2600

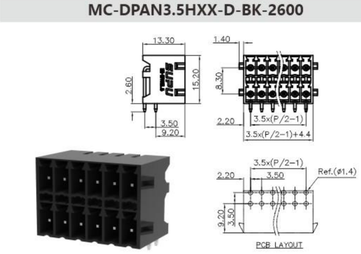

MC-DPAN3.5HXX-F-BK-2600

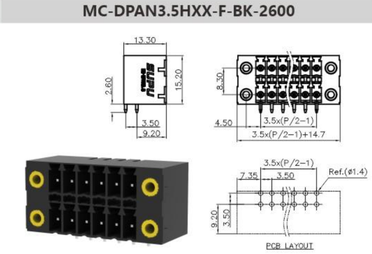

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	9-10

订货号/通道数 Order /Poles No.	
MC-PF3.5HXXP-0001	2-24
MC-PF3.5HXXP-B-0001	2-24
MC-PF3.5HXXP-D-0001	2-24
MC-PF3.5HXXP-DB-0001	2-24
MC-PF3.5HXXP-F-0001	2-24

订货号/通道数 Order /Poles No.	
MC-PF3.5HXXP-FB-0001	2-24
MC-PF3.5HXXP-I-0001	2-24
MC-PF3.5HXXP-IB-0001	2-24
MC-PF3.5HXXP-K-0001	2-24

MC-PF3.5HXXP-0001



MC-PF3.5HXXP-B-0001

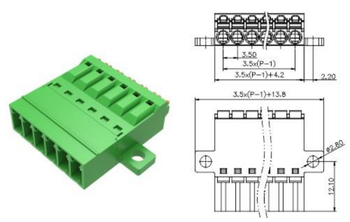

MC-PF3.5HXXP-D-0001



MC-PF3.5HXXP-I-0001



MC-PF3.5HXXP-IB-0001

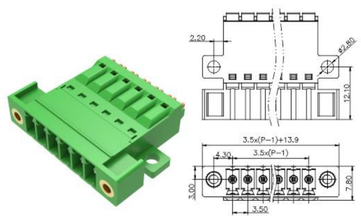

MC-PF3.5HXXP-K-0001

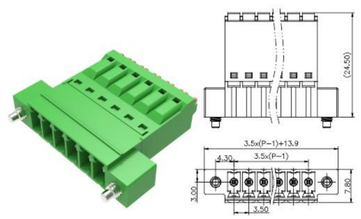

3.5mm间距 Pitch: 3.5mm

附件Accessory	

MC-PF3.5HXXP-DB-0001

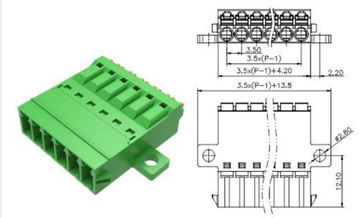

MC-PF3.5HXXP-F-0001

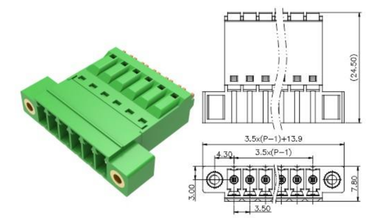

MC-PF3.5HXXP-FB-0001

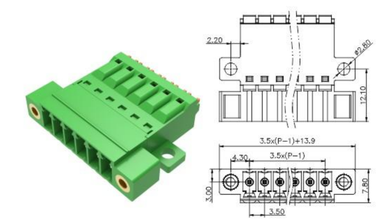

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PA3.5VXX-0002	2-24
MC-PA3.5VXX-D-0002	2-24
MC-PA3.5VXX-F-0002	2-24
MC-PA3.5VXX-I-0002	2-24
MC-PA3.5VXX-L-0002	2-24
MC-PA3.5VXX-OG-WD	2-24

订货号/通道数 Order /Poles No.	
MC-PA3.5HXX-0002	2-24
MC-PA3.5HXX-D-0002	2-24
MC-PA3.5HXX-F-0002	2-24
MC-PA3.5HXX-I-0002	2-24
MC-PA3.5HXX-L-0002	2-24
MC-PA3.5HXX-OG-WD	2-24

附件Accessory	

MC-PA3.5VXX-0002



MC-PA3.5VXX-D-0002



MC-PA3.5VXX-F-0002

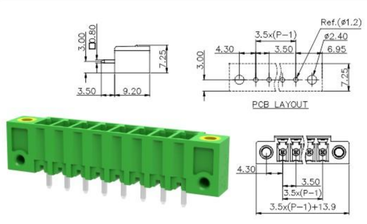

MC-PA3.5HXX-0002



MC-PA3.5HXX-D-0002

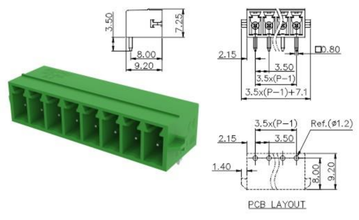

MC-PA3.5HXX-F-0002

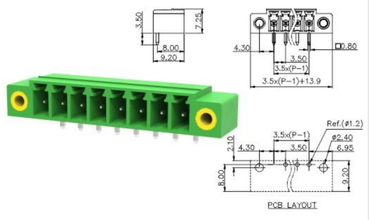

MC-PA3.5VXX-I-0002

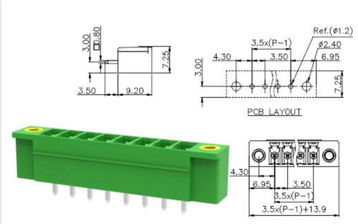

MC-PA3.5VXX-L-0002

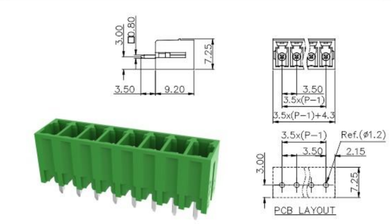

MC-PA3.5VXX-OG-WD

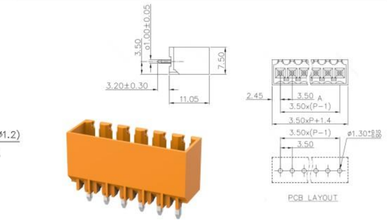

MC-PA3.5HXX-I-0002

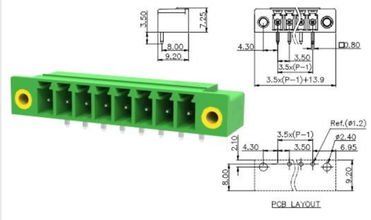

MC-PA3.5HXX-L-0002

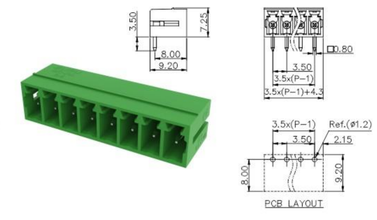

MC-PA3.5HXX-OG-WD

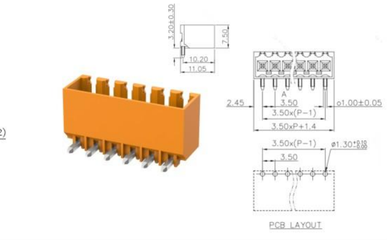

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2
扭矩 Torque	[N·m]	0.25
剥线长度 Strip length	[mm]	9-10

订货号/通道数 Order /Poles No.	
MC-DRT3.5HXXP-A-0001	4-40
MC-DRT3.5HXXP-K-0001	4-40
MC-DRT3.5HXXP-I-0001	4-40

附件Accessory

MC-DRT3.5HXXP-A-0001



MC-DRT3.5HXXP-K-0001



MC-DRT3.5HXXP-I-0001

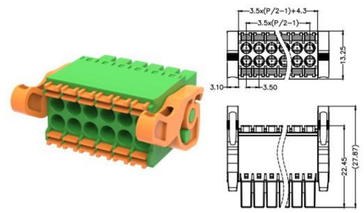

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	13.5	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2
扭矩 Torque	[N·m]	0.2
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-DRG3.5HXXP-0001	4-48
MC-DRG3.5HXXP-K-0001	4-48
MC-DRG3.5HXXP-I-0001	4-48

附件Accessory

MC-DRG3.5HXXP-0001



MC-DRG3.5HXXP-K-0001



MC-DRG3.5HXXP-I-0001



3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.0
扭矩 Torque	[N·m]	0.2
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPT3.5VXX-BK-2000	4-40
MC-DPT3.5VXX-F-BK-2000	4-40
MC-DPT3.5VXX-I-BK-2000	4-40
MC-DPT3.5HXX-BK-2000	4-40
MC-DPT3.5HXX-F-BK-2000	4-40
MC-DPT3.5HXX-I-BK-2000	4-40

附件Accessory

MC-DPT3.5VXX-BK-2000



MC-DPT3.5VXX-F-BK-2000

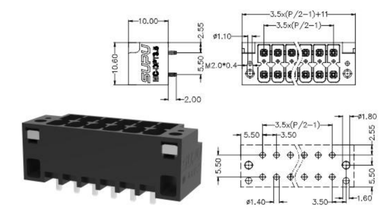

MC-DPT3.5VXX-I-BK-2000

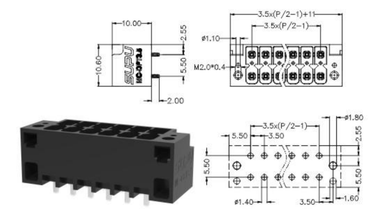

MC-DPT3.5HXX-BK-2000



MC-DPT3.5HXX-F-BK-2000

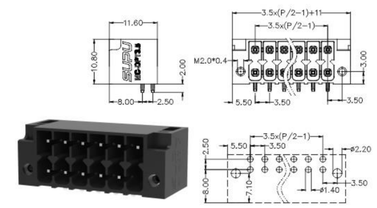

MC-DPT3.5HXX-I-BK-2000

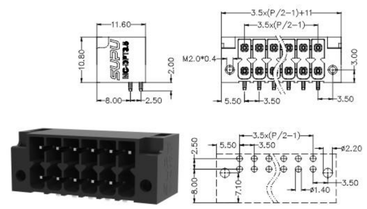

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	125	150
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.0
扭矩 Torque	[N·m]	0.2
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPG3.5VXX-3500	4-48
MC-DPG3.5VXX-F-3500	4-48
MC-DPG3.5VXX-I-3500	4-48
MC-DPG3.5HXX-3500	4-48
MC-DPG3.5HXX-F-3500	4-48
MC-DPG3.5HXX-I-3500	4-48

附件Accessory

MC-DPG3.5VXX-3500

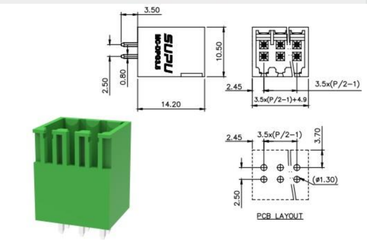

MC-DPG3.5VXX-F-3500

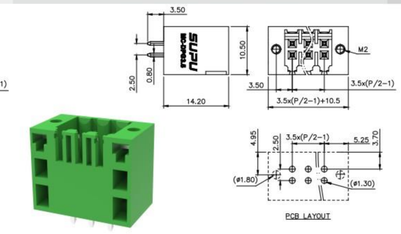

MC-DPG3.5VXX-I-3500

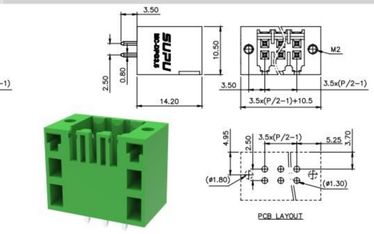

MC-DPG3.5HXX-3500



MC-DPG3.5HXX-F-3500

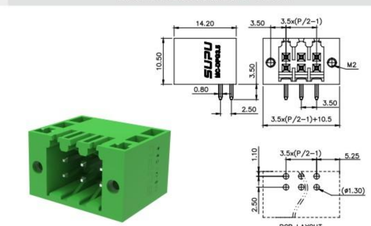

MC-DPG3.5HXX-I-3500

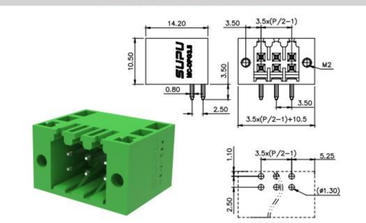

3.81mm间距 Pitch: 3.81mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information

锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.

MC-RA3.81HXXC-0001	2-24
MC-RA3.81HXXC-K-0001	2-24
MC-RA3.81HXXC-I-0001	2-24

附件Accessory

MC-JP3.81-X	

MC-RA3.81HXXC-0001



MC-RA3.81HXXC-K-0001

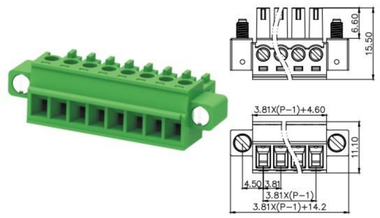

MC-RA3.81HXXC-I-0001

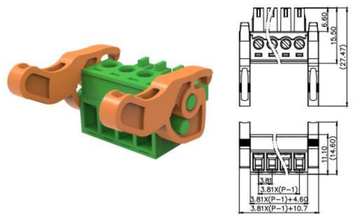

3.81mm间距 Pitch: 3.81mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information

锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.

MC-RAF3.81HXXC-0001	2-24
MC-RAF3.81HXXC-K-0001	2-24
MC-RAF3.81HXXC-I-0001	2-24

附件Accessory

MC-JP3.81-X	

MC-RAF3.81HXXC-0001



MC-RAF3.81HXXC-K-0001

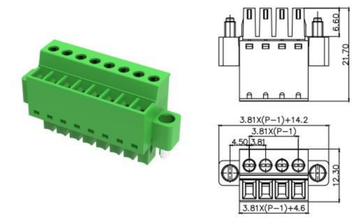

MC-RAF3.81HXXC-I-0001



3.81mm间距 Pitch: 3.81mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information

锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-RE3.81VXXC-0001	2-24
MC-RE3.81VXXC-K-0001	2-24
MC-RE3.81VXXC-I-0001	2-24
MC-RE3.81VXXC-R-0001	2-24
MC-RE3.81VXXC-RK-0001	2-24

附件Accessory

MC-JP3.81-X	

MC-RE3.81VXXC-0001



MC-RE3.81VXXC-K-0001

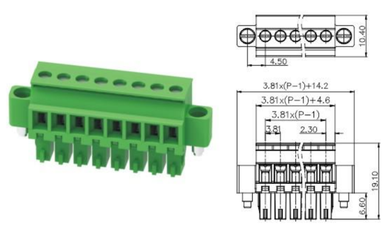

MC-RE3.81VXXC-I-0001



MC-RE3.81VXXC-R-0001



MC-RE3.81VXXC-RK-0001

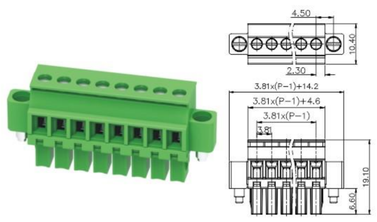

3.81mm间距 Pitch: 3.81mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information

锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.

MC-RJ3.81HXXP-0001	2-24
MC-RJ3.81HXXP-K-0001	2-24
MC-RJ3.81HXXP-I-0001	2-24

附件Accessory

MC-JP3.81-X	

MC-RJ3.81HXXP-0001



MC-RJ3.81HXXP-K-0001

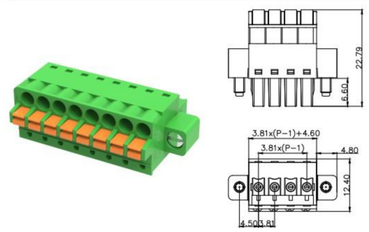

MC-RJ3.81HXXP-I-0001

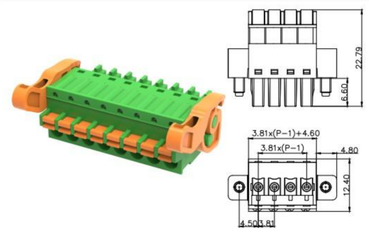

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10

订货号/通道数 Order /Poles No.	
MC-RF3.81HXXP-0001	2-24
MC-RF3.81HXXP-K-0001	2-24
MC-RF3.81HXXP-I-0001	2-24
MC-RF3.81HXXP-D-0001	2-24

附件Accessory	
MC-JP3.81-X	

MC-RF3.81HXXP-0001



MC-RF3.81HXXP-K-0001

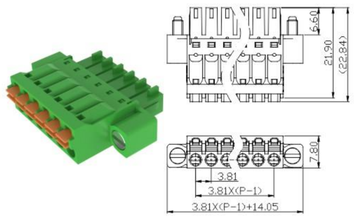

MC-RF3.81HXXP-I-0001

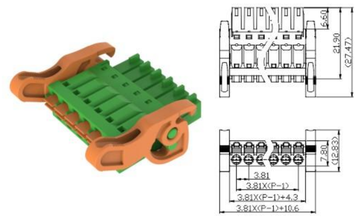

MC-RF3.81HXXP-D-0001

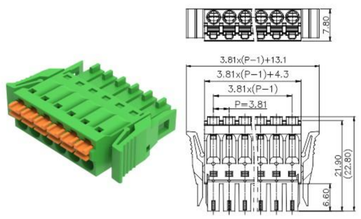

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPAN3.81VXX-BK-2600	4-48
MC-DPAN3.81VXX-D-BK-2600	4-48
MC-DPAN3.81VXX-F-BK-2600	4-48
MC-DPAN3.81HXX-BK-2600	4-48
MC-DPAN3.81HXX-D-BK-2600	4-48
MC-DPAN3.81HXX-F-BK-2600	4-48

附件Accessory	
MC-R-MSTB3.81	

MC-DPAN3.81VXX-BK-2600



MC-DPAN3.81VXX-D-BK-2600

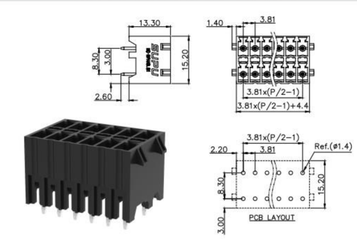

MC-DPAN3.81VXX-F-BK-2600

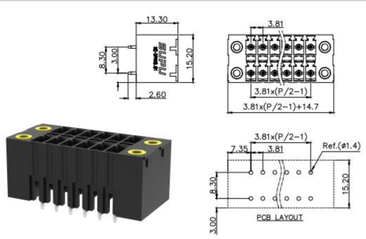

MC-DPAN3.81HXX-BK-2600



MC-DPAN3.81HXX-D-BK-2600



MC-DPAN3.81HXX-F-BK-2600

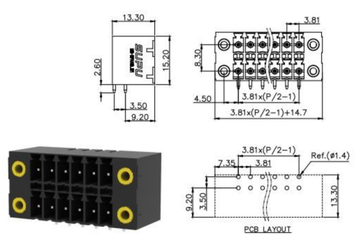

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2.5
扭矩 Torque	[N·m]	0.3
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10

订货号/通道数 Order /Poles No.	
MC-DRF3.81HXXP-0001	4-48
MC-DRF3.81HXXP-D-0001	4-48
MC-DRF3.81HXXP-K-0001	4-48

附件Accessory	

MC-DRF3.81HXXP-0001

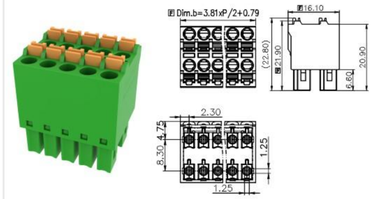

MC-DRF3.81HXXP-D-0001

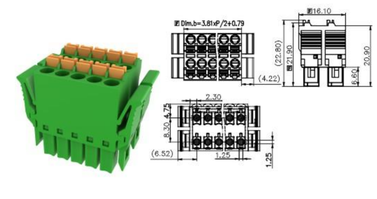

MC-DRF3.81HXXP-K-0001

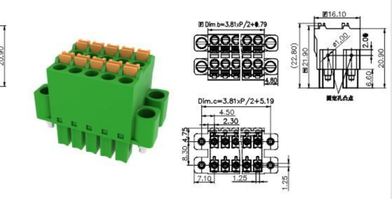

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-RU3.81SHXX-0001	2-24
MC-RU3.81SHXX-F-0001	2-24
MC-RU3.81SVXX-0001	2-24
MC-RU3.81SVXX-F-0001	2-24

附件Accessory	

MC-RU3.81SHXX-0001

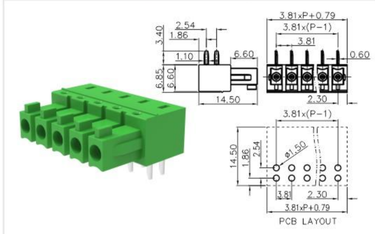

MC-RU3.81SHXX-F-0001

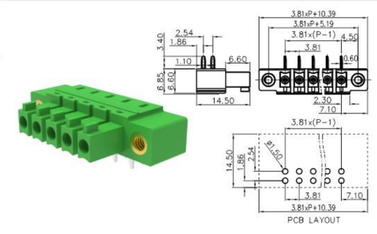

MC-RU3.81SVXX-0001

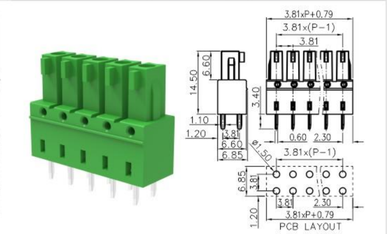

MC-RU3.81SVXX-F-0001

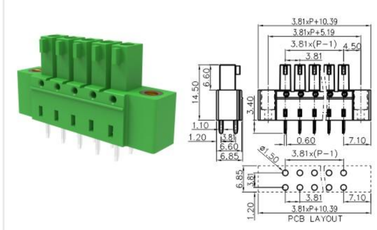

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10

订货号/通道数 Order /Poles No.	
MC-PF3.81HXXP-0001	2-24
MC-PF3.81HXXP-B-0001	2-24
MC-PF3.81HXXP-D-0001	2-24
MC-PF3.81HXXP-DB-0001	2-24
MC-PF3.81HXXP-F-0001	2-24

订货号/通道数 Order /Poles No.	
MC-PF3.81HXXP-FB-0001	2-24
MC-PF3.81HXXP-I-0001	2-24
MC-PF3.81HXXP-IB-0001	2-24
MC-PF3.81HXXP-K-0001	2-24

附件Accessory	
MC-R-MSTB3.81	
MC-JP3.81-X	

MC-PF3.81HXXP-0001

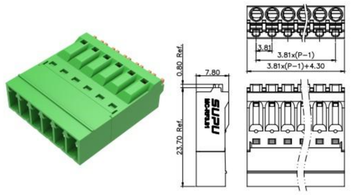

MC-PF3.81HXXP-B-0001

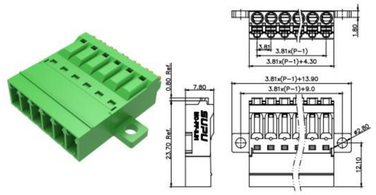

MC-PF3.81HXXP-D-0001



MC-PF3.81HXXP-DB-0001

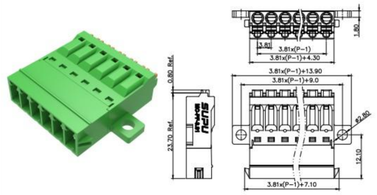

MC-PF3.81HXXP-F-0001

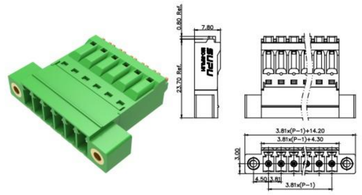

MC-PF3.81HXXP-FB-0001

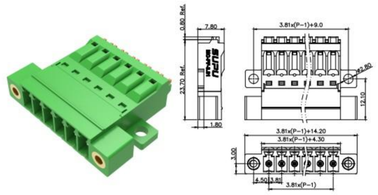

MC-PF3.81HXXP-I-0001

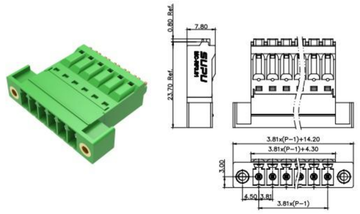

MC-PF3.81HXXP-IB-0001

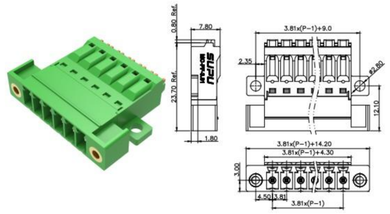

MC-PF3.81HXXP-K-0001

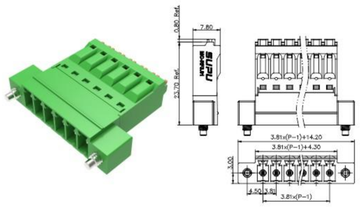

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PA3.81VXX-0002	2-24
MC-PA3.81VXX-F-0002	2-24
MC-PA3.81VXX-I-0002	2-24
MC-PA3.81VXX-L-0002	2-24
MC-PA3.81HXX-0002	2-24
MC-PA3.81HXX-F-0002	2-24

订货号/通道数 Order /Poles No.	
MC-PA3.81HXX-I-0002	2-24
MC-PA3.81HXX-L-0002	2-24
MC-PA3.81AXX-0002	2-24
MC-PA3.81AXX-F-0002	2-24
MC-PA3.81AXX-I-0002	2-24

附件Accessory	
MC-R-MSTB3.81	

MC-PA3.81VXX-0002



MC-PA3.81VXX-F-0002

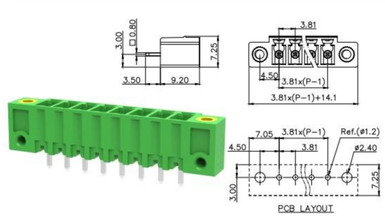

MC-PA3.81VXX-I-0002

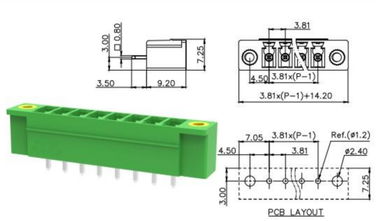

MC-PA3.81VXX-L-0002

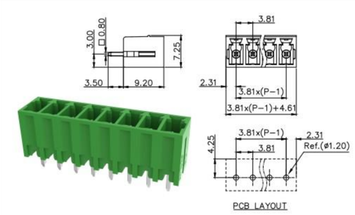

MC-PA3.81HXX-0002

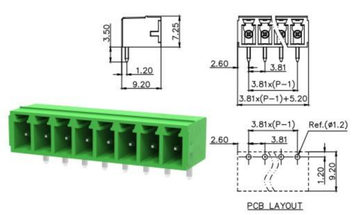

MC-PA3.81HXX-F-0002

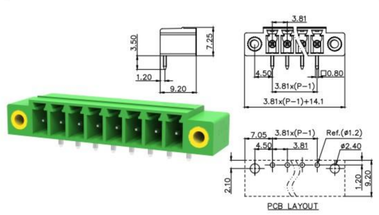

MC-PA3.81HXX-I-0002

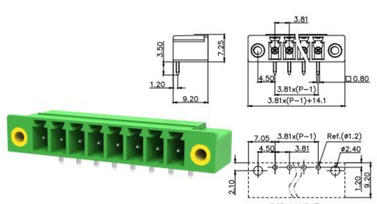

MC-PA3.81HXX-L-0002



MC-PA3.81AXX-0002



MC-PA3.81AXX-F-0002



MC-PA3.81AXX-I-0002



3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPA3.81VXX-0002	4-48
MC-DPA3.81VXX-F-0002	4-48
MC-DPA3.81HXX-0002	4-48
MC-DPA3.81HXX-F-0002	4-48

附件Accessory
MC-R-MSTB3.81

MC-DPA3.81VXX-0002

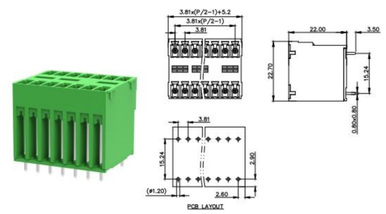

MC-DPA3.81VXX-F-0002

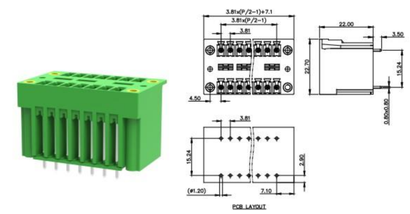

MC-DPA3.81HXX-0002

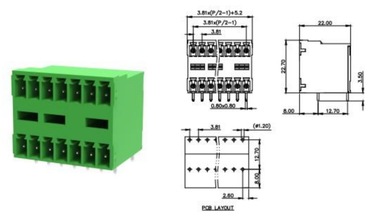

MC-DPA3.81HXX-F-0002

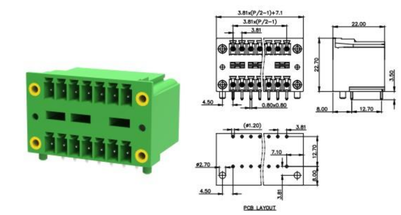

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPAB3.81VXX-0001	4-48
MC-DPAB3.81VXX-F-0001	4-48
MC-DPAB3.81VXX-I-0001	4-48
MC-DPAB3.81HXX-0001	4-48
MC-DPAB3.81HXX-F-0001	4-48
MC-DPAB3.81HXX-I-0001	4-48

附件Accessory
MC-R-MSTB3.81

MC-DPAB3.81VXX-0001

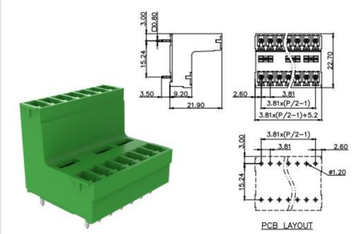

MC-DPAB3.81VXX-F-0001

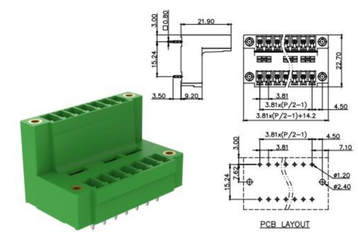

MC-DPAB3.81VXX-I-0001

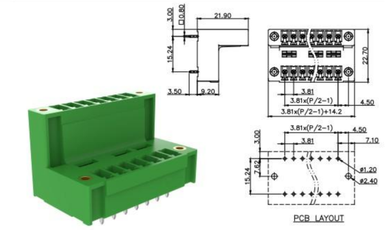

MC-DPAB3.81HXX-0001



MC-DPAB3.81HXX-F-0001

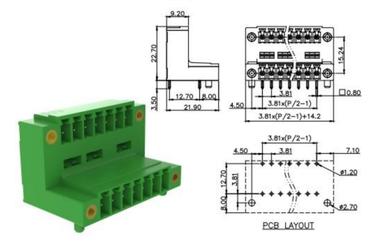

MC-DPAB3.81HXX-I-0001

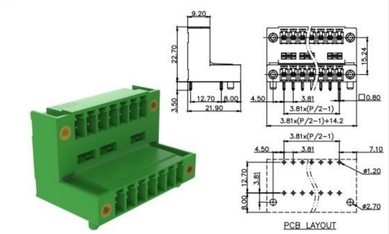

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-PB3.81HXXC-0001	2-24
MC-PB3.81HXXC-B-0001	2-24
MC-PB3.81HXXC-F-0001	2-24
MC-PB3.81HXXC-FB-0001	2-24

订货号/通道数 Order /Poles No.	
MC-PB3.81HXXC-I-0001	2-24
MC-PB3.81HXXC-IB-0001	2-24
MC-PB3.81HXXC-K-0001	2-24
MC-PB3.81HXXC-KB-0001	2-24

MC-PB3.81HXXC-0001



MC-PB3.81HXXC-B-0001



MC-PB3.81HXXC-F-0001



MC-PB3.81HXXC-K-0001

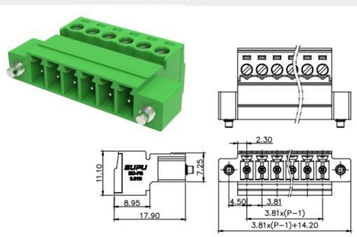

MC-PB3.81HXXC-KB-0001



3.81mm间距 Pitch: 3.81mm

附件Accessory
MC-R-MSTB3.81
MC-JP3.81-X

MC-PB3.81HXXC-FB-0001

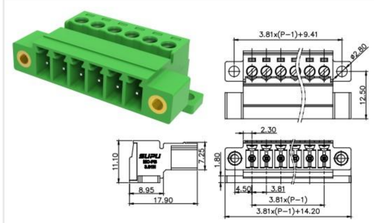

MC-PB3.81HXXC-I-0001

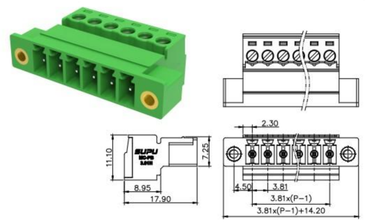

MC-PB3.81HXXC-IB-0001

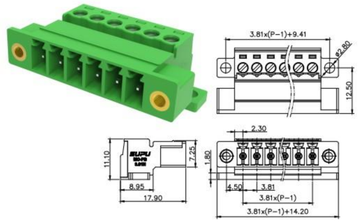

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RB5.0HXXC-0001	2-24
MC-RB5.0HXXC-K-0001	2-24
MC-RB5.0HXXC-I-0001	2-24

附件Accessory	
MC-WG5.0-XX	
MC-GW5.08-9.9	
MC-GW5.08-19.9	
MC-GW5.08-39.9	
MC-JP5.0-XX	
MC-R-MSTB	

MC-RB5.0HXXC-0001



MC-RB5.0HXXC-K-0001

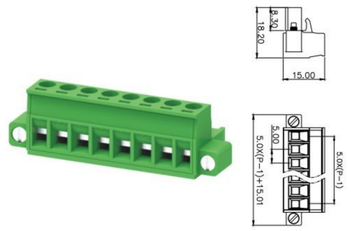

MC-RB5.0HXXC-I-0001

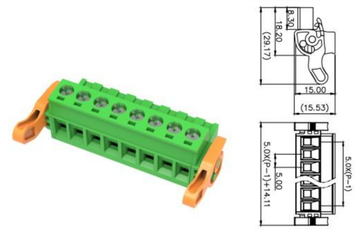

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RE5.0VXXC-0001	2-24
MC-RE5.0VXXC-K-0001	2-24
MC-RE5.0VXXC-I-0001	2-24
MC-RE5.0VXXC-R-0001	2-24
MC-RE5.0VXXC-RK-0001	2-24

附件Accessory	
MC-JP5.0-XX	
MC-R-MSTB	

MC-RE5.0VXXC-0001



MC-RE5.0VXXC-K-0001

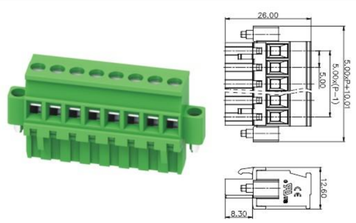

MC-RE5.0VXXC-I-0001



MC-RE5.0VXXC-R-0001

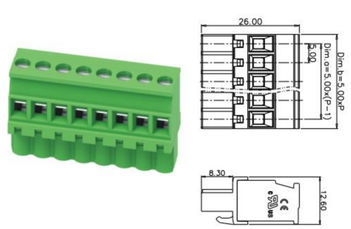

MC-RE5.0VXXC-RK-0001

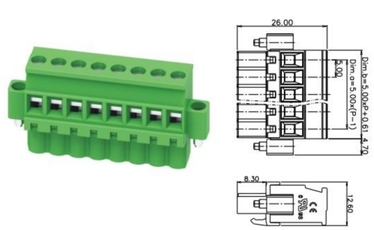

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RBT5.0HXXC-0001	2-24
MC-RBT5.0HXXC-K-0001	2-24
MC-RBT/T5.0HXXC-0001	2-24
MC-RBT/T5.0HXXC-K-0001	2-24

附件Accessory	
MC-JP5.0-XX	
MC-R-MSTB	

MC-RBT5.0HXXC-0001

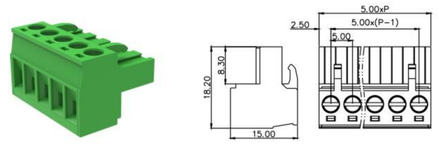

MC-RBT5.0HXXC-K-0001

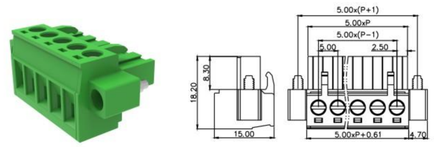

MC-RBT/T5.0HXXC-0001

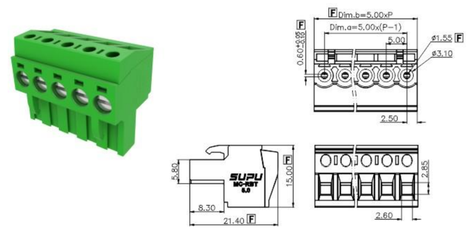

MC-RBT/T5.0HXXC-K-0001

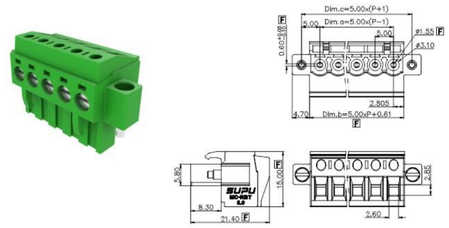

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RJ5.0HXXP-0001	2-24
MC-RJ5.0HXXP-K-0001	2-24
MC-RJ5.0HXXP-I-0001	2-24
MC-RJ5.0HXXP-D-0001	2-24

附件Accessory	
MC-JP5.0-XX	
MC-R-MSTB	

MC-RJ5.0HXXP-0001



MC-RJ5.0HXXP-K-0001



MC-RJ5.0HXXP-I-0001



MC-RJ5.0HXXP-D-0001



5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺母 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PA5.0VXX-0002	2-24
MC-PA5.0VXX-D-0002	2-24
MC-PA5.0VXX-F-0002	2-24
MC-PA5.0VXX-G-0002	2-24
MC-PA5.0VXX-I-0002	2-24

订货号/通道数 Order /Poles No.	
MC-PA5.0HXX-0002	2-24
MC-PA5.0HXX-D-0002	2-24
MC-PA5.0HXX-F-0002	2-24
MC-PA5.0HXX-G-0002	2-24
MC-PA5.0HXX-I-0002	2-24

MC-PA5.0VXX-0002



MC-PA5.0VXX-D-0002



MC-PA5.0VXX-F-0002

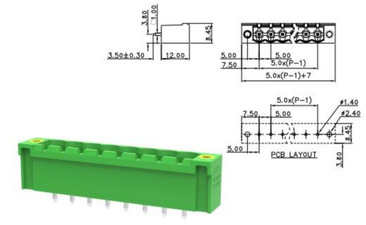

MC-PA5.0HXX-0002

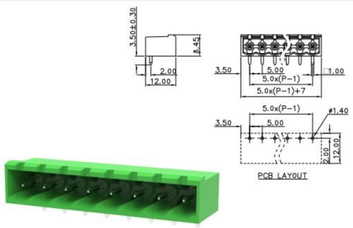

MC-PA5.0HXX-D-0002

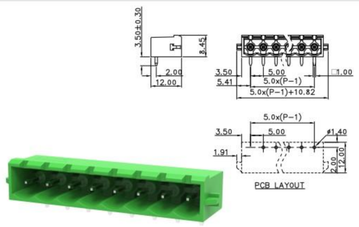

MC-PA5.0HXX-F-0002

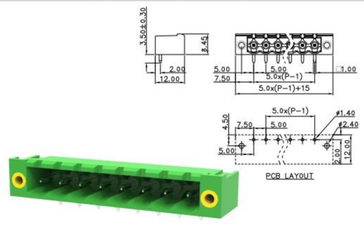

5.0mm间距 Pitch: 5.0mm

附件Accessory	
MC-P-MSTB	

MC-PA5.0VXX-G-0002



MC-PA5.0VXX-I-0002

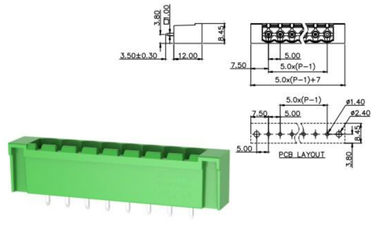

MC-PA5.0HXX-G-0002



MC-PA5.0HXX-I-0002

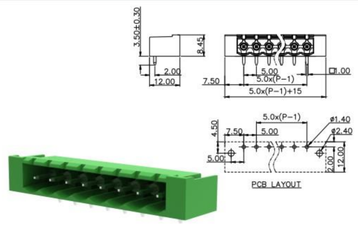

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺母 Fixed screw		M2.5
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPA5.0HXX-0002	4-48
MC-DPA5.0HXX-F-0002	4-48
MC-DPA5.0VXX-0002	4-48
MC-DPA5.0VXX-F-0002	4-48

附件Accessory	
MC-JP5.0-XX	

MC-DPA5.0HXX-0002

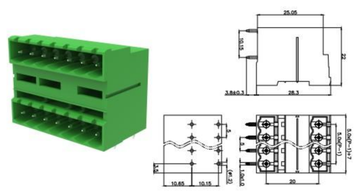

MC-DPA5.0HXX-F-0002

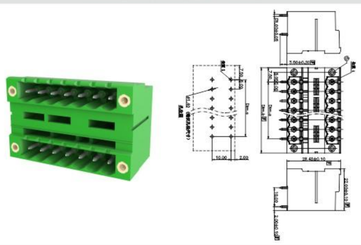

MC-DPA5.0VXX-0002

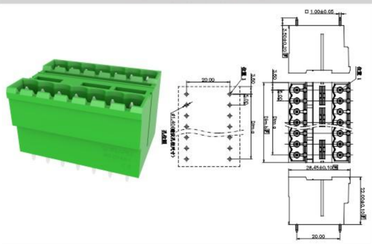

MC-DPA5.0VXX-F-0002

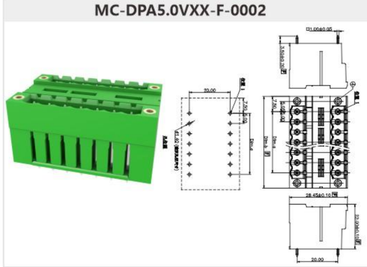

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	16
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PAL5.0H02-0002	2
MC-PAL5.0H03-0002	3
MC-PAL5.0H04-0002	4
MC-PAR5.0H02-0002	2
MC-PAR5.0H03-0002	3
MC-PAR5.0H04-0002	4

附件Accessory	
MC-P-MSTB	

MC-PAL5.0H02-0002



MC-PAL5.0H03-0002



MC-PAL5.0H04-0002

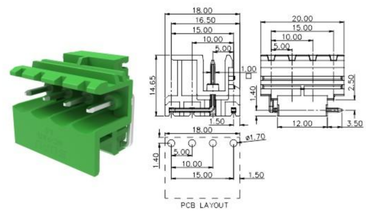

MC-PAR5.0H02-0002



MC-PAR5.0H03-0002



MC-PAR5.0H04-0002

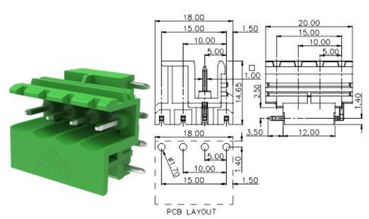

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	20	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-ROX5.0HXXP-0001	2-12
MC-ROY5.0HXXP-0001	2-12
MC-ROX5.0HXXP-0002	2-12

附件Accessory	
MC-JT7.5	

MC-ROX5.0HXXP-0001



MC-ROY5.0HXXP-0001



MC-ROX5.0HXXP-0002



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RA5.08HXXC-0001	2-24
MC-RA5.08HXXC-K-0001	2-24
MC-RA5.08HXXC-I-0001	2-24

附件Accessory	

MC-RA5.08HXXC-0001



MC-RA5.08HXXC-K-0001



MC-RA5.08HXXC-I-0001



5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	15	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-POX5.0HXX-0001	2-12
MC-POY5.0HXX-0001	2-12
MC-POX5.0HXX-0002	2-12

附件Accessory	

MC-POX5.0HXX-0001



MC-POY5.0HXX-0001



MC-POX5.0HXX-0002



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RB5.08HXXC-0001	2-24
MC-RB5.08HXXC-K-0001	2-24
MC-RB5.08HXXC-I-0001	2-24

附件Accessory	
MC-WG5.0-X	
MC-GW5.08-XX	
MC-JP5.0-X	
MC-R-MSTB	

MC-RB5.08HXXC-0001



MC-RB5.08HXXC-K-0001



MC-RB5.08HXXC-I-0001



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RB5.08HXXB-0001	2-24
MC-RB5.08HXXB/100-0001	2-24
MC-RB5.08HXXB-I-0001	2-24
MC-RB5.08HXXB-I/100-0001	2-24
MC-RB5.08HXXB-K-0001	2-24
MC-RB5.08HXXB-K/100-0001	2-24

附件Accessory	
MC-JP5.0-XX	
MC-R-MSTB	

MC-RB5.08HXXB-0001



MC-RB5.08HXXB/100-0001



MC-RB5.08HXXB-I-0001



MC-RB5.08HXXB-I/100-0001

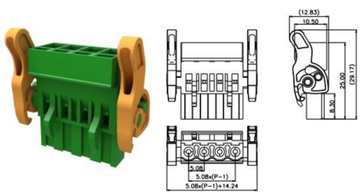

MC-RB5.08HXXB-K-0001



MC-RB5.08HXXB-K/100-0001



备注：该系列成品无导电件，与附件冷压头MC-RB5.08-03-3000，MC-RB5,08-10-3000，MC-RB5.08-25-3000配对使用

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	5	-
额定电压 Rated voltage	[V]	320	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.34	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

订货号/通道数 Order /Poles No.
MC-RB5.08-03-3000

MC-RB5.08-03-3000

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	-
额定电压 Rated voltage	[V]	320	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	0.5-1.0	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

订货号/通道数 Order /Poles No.
MC-RB5.08-10-3000

MC-RB5.08-10-3000

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	-
额定电压 Rated voltage	[V]	320	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	1.5-2.5	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

订货号/通道数 Order /Poles No.
MC-RB5.08-25-3000

MC-RB5.08-25-3000

注：导电件可配MC-RB5.08HXXB产品

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M2.5
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	11-12

订货号/通道数 Order /Poles No.	
MC-RBF5.08HXXC-0001	2-24
MC-RBF5.08HXXC-K-0001	2-24
MC-RBF5.08HXXC-I-0001	2-24

附件Accessory	
MC-JP5.0-X	
MC-R-MSTB	

MC-RBF5.08HXXC-0001

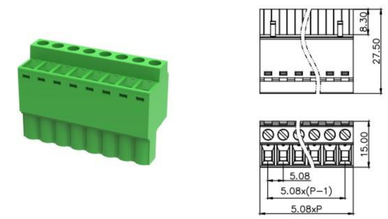

MC-RBF5.08HXXC-K-0001

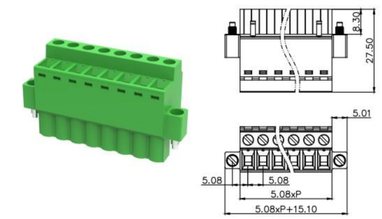

MC-RBF5.08HXXC-I-0001

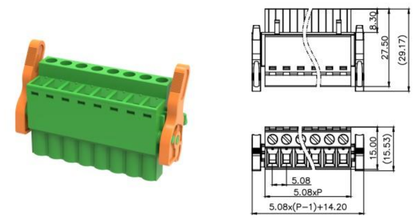

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RE5.08VXXC-0001	2-24
MC-RE5.08VXXC-K-0001	2-24
MC-RE5.08VXXC-I-0001	2-24
MC-RE5.08VXXC-R-0001	2-24
MC-RE5.08VXXC-RK-0001	2-24

附件Accessory	
MC-JP5.0-X	
MC-R-MSTB	

MC-RE5.08VXXC-0001



MC-RE5.08VXXC-K-0001

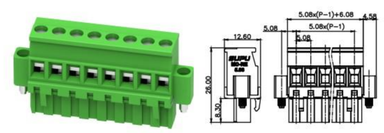

MC-RE5.08VXXC-I-0001

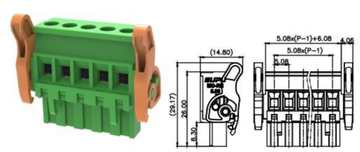

MC-RE5.08VXXC-R-0001



MC-RE5.08VXXC-RK-0001



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RN5.08VXXP-0001	2-24
MC-RN5.08VXXP-K-0001	2-24
MC-RN5.08VXXP-R-0001	2-24
MC-RN5.08VXXP-RK-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-RN5.08VXXP-0001

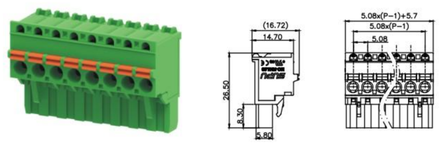

MC-RN5.08VXXP-K-0001

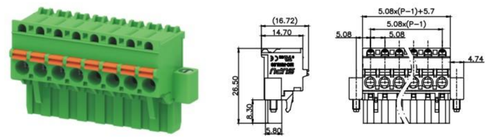

MC-RN5.08VXXP-R-0001



MC-RN5.08VXXP-RK-0001

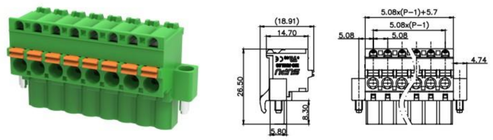

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RJ5.08HXXP-0001	2-24
MC-RJ5.08HXXP-D-0001	2-24
MC-RJ5.08HXXP-I-0001	2-24
MC-RJ5.08HXXP-K-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-RJ5.08HXXP-0001

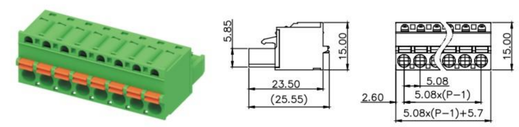

MC-RJ5.08HXXP-D-0001

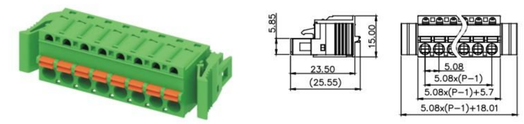

MC-RJ5.08HXXP-I-0001



MC-RJ5.08HXXP-K-0001

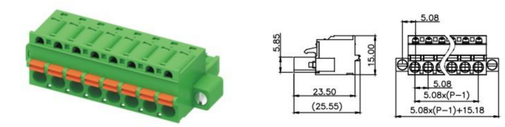

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RJT5.08HXXP-0001	2-24
MC-RJT5.08HXXP-K-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-RJT5.08HXXP-0001



MC-RJT5.08HXXP-K-0001

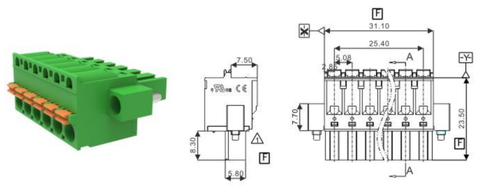

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	12
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	11-12

订货号/通道数 Order /Poles No.	
MC-DRJ5.08HXXP-0001	2-24
MC-DRJ5.08HXXP-K-0001	2-24
MC-DRJ5.08HXXP-I-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-DRJ5.08HXXP-0001

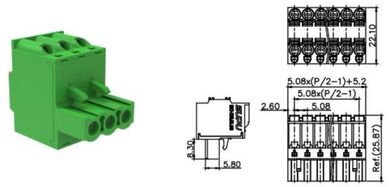

MC-DRJ5.08HXXP-K-0001

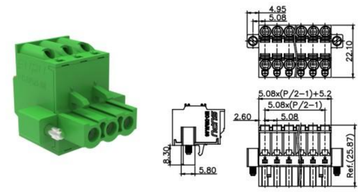

MC-DRJ5.08HXXP-I-0001

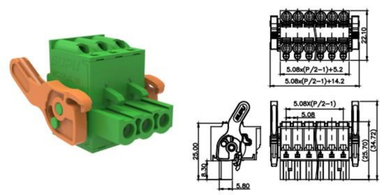

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RP5.08HXXP-0001	2-24
MC-RP5.08HXXP-K-0001	2-24
MC-RP5.08HXXP-I-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-RP5.08HXXP-0001

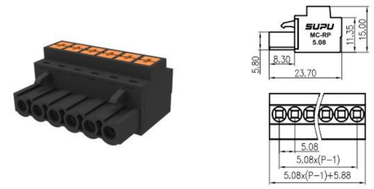

MC-RP5.08HXXP-K-0001



MC-RP5.08HXXP-I-0001

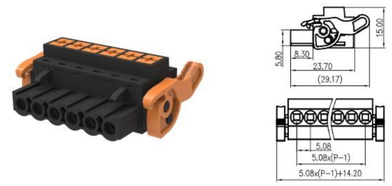

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	300	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-PJ5.08HXXP-0001	2-24
MC-PJ5.08HXXP-B-0001	2-24
MC-PJ5.08HXXP-D-0001	2-24
MC-PJ5.08HXXP-DB-0001	2-24
MC-PJ5.08HXXP-F-0001	2-24

订货号/通道数 Order /Poles No.	
MC-PJ5.08HXXP-I-0001	2-24
MC-PJ5.08HXXP-K-0001	2-24

附件Accessory	
MC-P-MSTB	

MC-PJ5.08HXXP-0001



MC-PJ5.08HXXP-B-0001



MC-PJ5.08HXXP-D-0001



MC-PJ5.08HXXP-DB-0001



MC-PJ5.08HXXP-F-0001



MC-PJ5.08HXXP-I-0001



MC-PJ5.08HXXP-K-0001



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PA5.08HXX-0002	2-24
MC-PA5.08HXX-D-0002	2-24
MC-PA5.08HXX-F-0002	2-24
MC-PA5.08HXX-G-0002	2-24
MC-PA5.08HXX-I-0002	2-24

订货号/通道数 Order /Poles No.	
MC-PA5.08VXX-0002	2-24
MC-PA5.08VXX-D-0002	2-24
MC-PA5.08VXX-F-0002	2-24
MC-PA5.08VXX-G-0002	2-24
MC-PA5.08VXX-I-0002	2-24

MC-PA5.08HXX-0002



MC-PA5.08HXX-D-0002



MC-PA5.08HXX-F-0002



MC-PA5.08VXX-0002



MC-PA5.08VXX-D-0002



MC-PA5.08VXX-F-0002



5.08mm间距 Pitch: 5.08mm

附件Accessory	
MC-P-MSTB	

MC-PA5.08HXX-G-0002

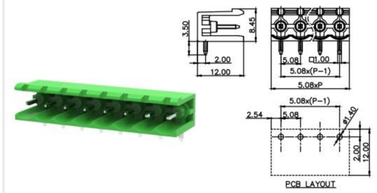

MC-PA5.08HXX-I-0002

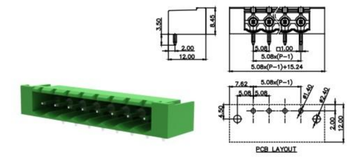

MC-PA5.08VXX-G-0002

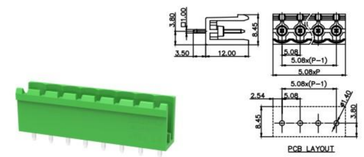

MC-PA5.08VXX-I-0002

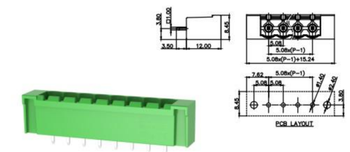

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-PB5.08HXXC-0001	2-24
MC-PB5.08HXXC-B-0001	2-24
MC-PB5.08HXXC-F-0001	2-24
MC-PB5.08HXXC-FB-0001	2-24
MC-PB5.08HXXC-I-0001	2-24

订货号/通道数 Order /Poles No.	
MC-PB5.08HXXC-IB-0001	2-24
MC-PB5.08HXXC-K-0001	2-24
MC-PB5.08HXXC-KB-0001	2-24
MC-PB5.08HXXC-S-0001	2-24
MC-PB5.08HXXC-SF-0001	2-24

订货号/通道数 Order /Poles No.	
MC-PB5.08HXXC-SI-0001	2-24
MC-PB5.08HXXC-SK-0001	2-24

附件Accessory	
MC-JP5.0-X	
MC-P-MSTB	

MC-PB5.08HXXC-0001

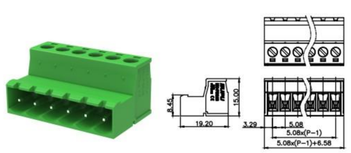

MC-PB5.08HXXC-B-0001

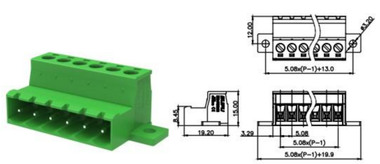

MC-PB5.08HXXC-F-0001

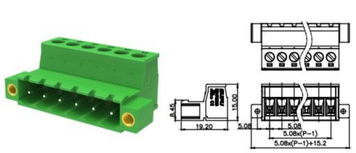

MC-PB5.08HXXC-FB-0001

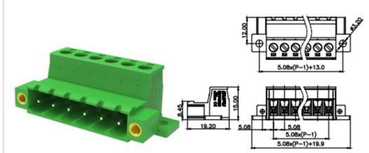

MC-PB5.08HXXC-I-0001

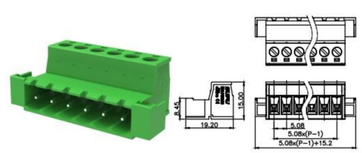

MC-PB5.08HXXC-IB-0001

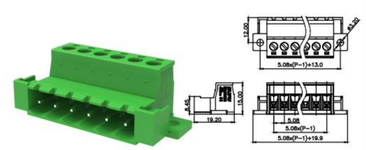

MC-PB5.08HXXC-K-0001

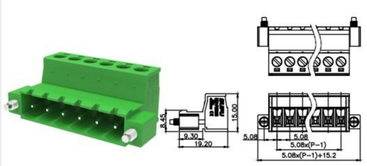

MC-PB5.08HXXC-KB-0001

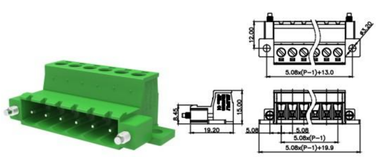

MC-PB5.08HXXC-S-0001

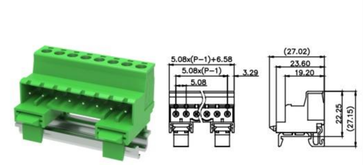

MC-PB5.08HXXC-SF-0001

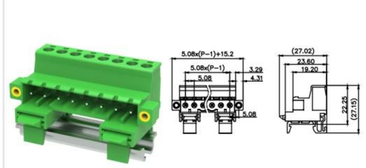

MC-PB5.08HXXC-SI-0001

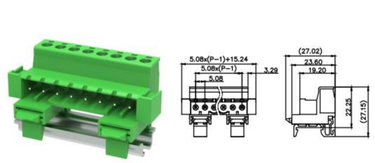

MC-PB5.08HXXC-SK-0001

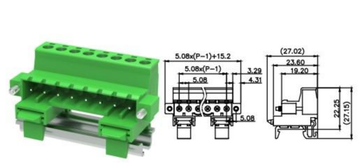

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	8
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PD5.08HXX-0001	2-24
MC-PD5.08HXX-F-0001	2-24
MC-PD5.08HXX-I-0001	2-24
MC-PD5.08VXX-0001	2-24
MC-PD5.08VXX-F-0001	2-24
MC-PD5.08VXX-I-0001	2-24

附件Accessory	
MC-R-MSTB3.81	

MC-PD5.08HXX-0001

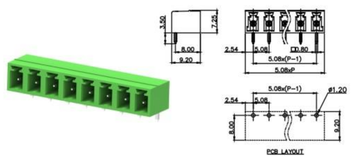

MC-PD5.08HXX-F-0001

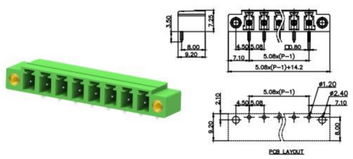

MC-PD5.08HXX-I-0001

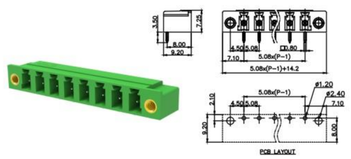

MC-PD5.08VXX-0001



MC-PD5.08VXX-F-0001

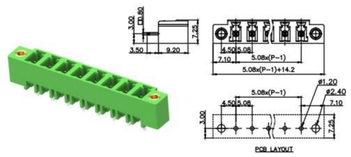

MC-PD5.08VXX-I-0001



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPA5.08HXX-0002	4-48
MC-DPA5.08HXX-F-0002	4-48
MC-DPA5.08VXX-0002	4-48
MC-DPA5.08VXX-F-0002	4-48

附件Accessory	
MC-P-MSTB-0001	

MC-DPA5.08HXX-0002

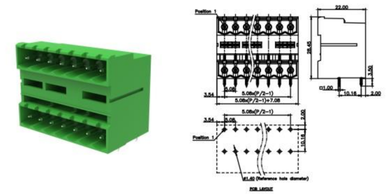

MC-DPA5.08HXX-F-0002

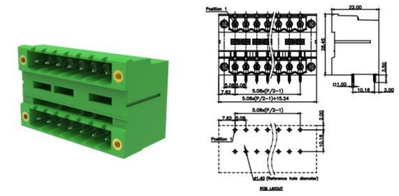

MC-DPA5.08VXX-0002

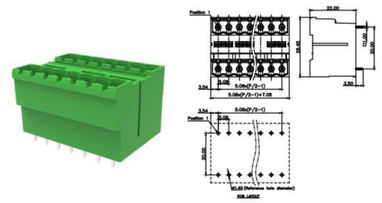

MC-DPA5.08VXX-F-0002

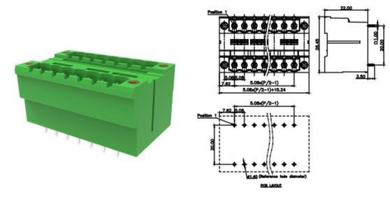

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-DPAB5.08HXX-0001	4-48
MC-DPAB5.08HXX-F-0001	4-48
MC-DPAB5.08HXX-G-0001	4-48
MC-DPAB5.08HXX-I-0001	4-48
MC-DPAB5.08VXX-0001	4-48
MC-DPAB5.08VXX-F-0001	4-48

订货号/通道数 Order /Poles No.	
MC-DPAB5.08VXX-G-0001	4-48
MC-DPAB5.08VXX-I-0001	4-48

附件Accessory	
MC-P-MSTB	

MC-DPAB5.08HXX-0001



MC-DPAB5.08HXX-F-0001

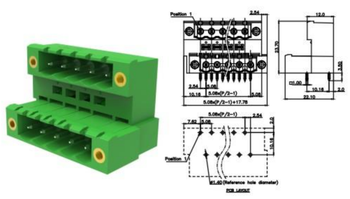

MC-DPAB5.08HXX-G-0001



MC-DPAB5.08VXX-G-0001

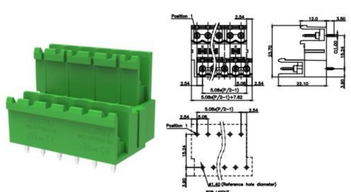

MC-DPAB5.08VXX-I-0001

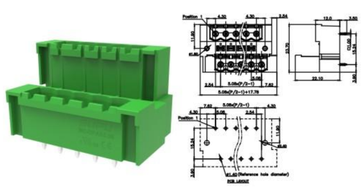

MC-DPAB5.08HXX-I-0001

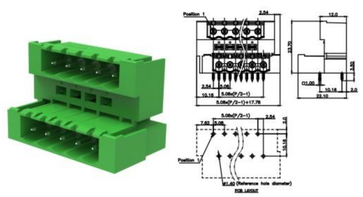

MC-DPAB5.08VXX-0001



MC-DPAB5.08VXX-F-0001

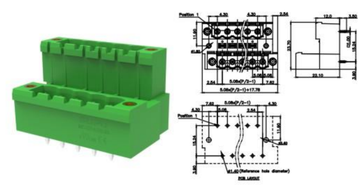

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	16
额定电压 Rated voltage	[V]	320	250
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-RU5.08SHXX-0001	2-24
MC-RU5.08SHXX-F-0001	2-24
MC-RU5.08SVXX-0001	2-24
MC-RU5.08SVXX-F-0001	2-24

附件Accessory	
MC-JP5.0-X	
MC-R-MSTB	

MC-RU5.08SHXX-0001

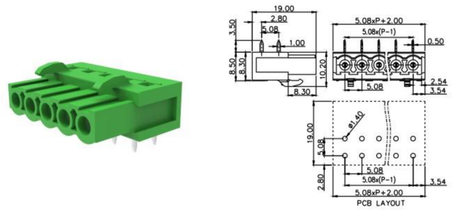

MC-RU5.08SHXX-F-0001

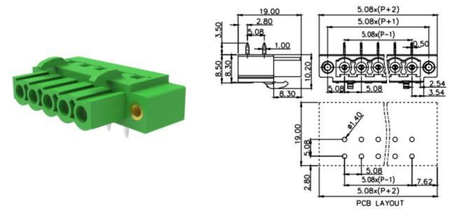

MC-RU5.08SVXX-0001

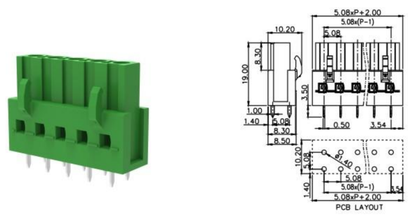

MC-RU5.08SVXX-F-0001

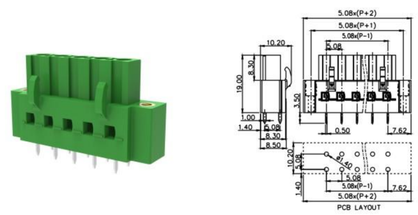

7.5mm间距 Pitch: 7.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RB7.5HXXC-0001	2-24
MC-RB7.5HXXC-K-0001	2-24
MC-RB7.5HXXC-I-0001	2-24

附件Accessory	

MC-RB7.5HXXC-0001



MC-RB7.5HXXC-K-0001



MC-RB7.5HXXC-I-0001



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RH5.08HXXC-B-0001	10-40
MC-RH5.08HXXC-T-0001	10-40

附件Accessory	
MC-JP5.0-X	
MC-R-MSTB	

MC-RH5.08HXXC-B-0001

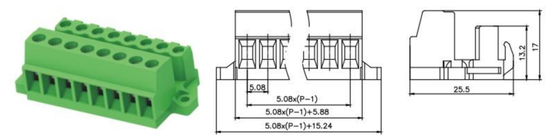

MC-RH5.08HXXC-T-0001

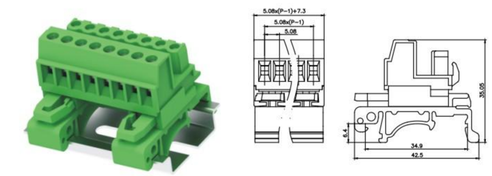

7.5mm间距 Pitch: 7.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RE7.5VXXC-0001	2-24
MC-RE7.5VXXC-K-0001	2-24
MC-RE7.5VXXC-I-0001	2-24
MC-RE7.5VXXC-R-0001	2-24
MC-RE7.5VXXC-RK-0001	2-24

附件Accessory	

MC-RE7.5VXXC-0001



MC-RE7.5VXXC-K-0001



MC-RE7.5VXXC-I-0001



MC-RE7.5VXXC-R-0001



MC-RE7.5VXXC-RK-0001



7.5mm间距 Pitch: 7.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RJ7.5HXXP-0001	2-24
MC-RJ7.5HXXP-K-0001	2-24
MC-RJ7.5HXXP-I-0001	2-24

附件Accessory	

MC-RJ7.5HXXP-0001



MC-RJ7.5HXXP-K-0001



MC-RJ7.5HXXP-I-0001



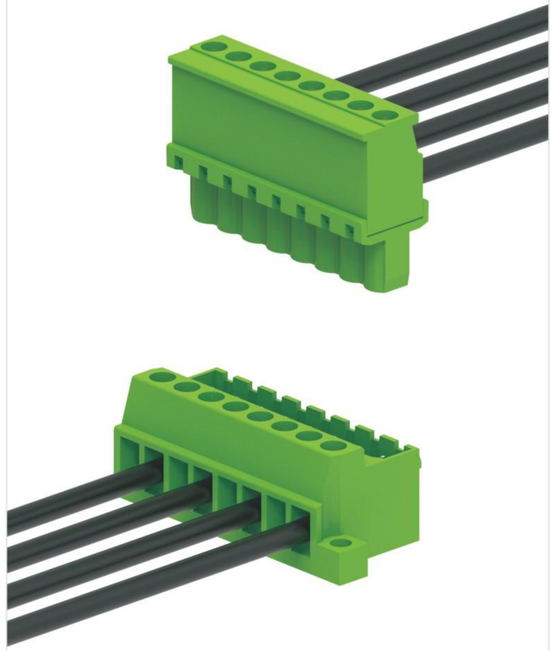

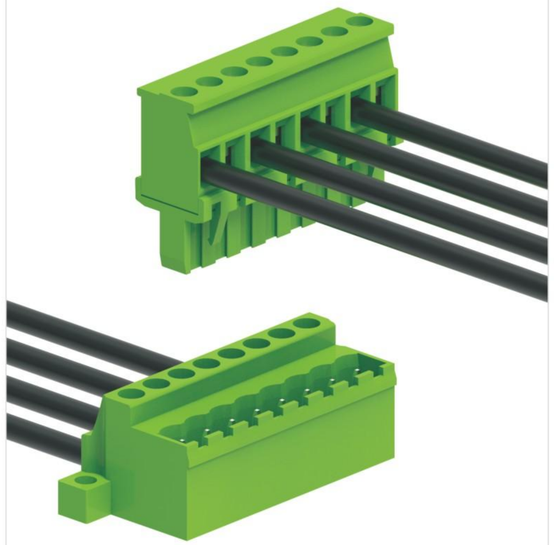

7.5mm间距 Pitch: 7.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PA7.5HXX-0002	2-24
MC-PA7.5HXX-F-0002	2-24
MC-PA7.5HXX-G-0002	2-24
MC-PA7.5HXX-I-0002	2-24

订货号/通道数 Order /Poles No.	
MC-PA7.5VXX-0002	2-24
MC-PA7.5VXX-F-0002	2-24
MC-PA7.5VXX-G-0002	2-24
MC-PA7.5VXX-I-0002	2-24

附件Accessory	

MC-PA7.5HXX-0002



MC-PA7.5HXX-F-0002



MC-PA7.5HXX-G-0002



MC-PA7.5HXX-I-0002



MC-PA7.5VXX-0002



MC-PA7.5VXX-F-0002



MC-PA7.5VXX-G-0002



MC-PA7.5VXX-I-0002



7.5mm间距 Pitch: 7.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	20	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	9-10

订货号/通道数 Order /Poles No.	
MC-ROX7.5HXXP-0001	2-12
MC-ROY7.5HXXP-0001	2-12
MC-POX5.0HXX-0002	2-12

附件Accessory	

MC-ROX7.5HXXP-0001



MC-ROY7.5HXXP-0001



7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RB7.62HXXC-0001	2-24
MC-RB7.62HXX-K-0001	2-24
MC-RB7.62HXXC-I-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-RB7.62HXXC-0001

MC-RB7.62HXXC-K-0001



MC-RB7.62HXXC-I-0001



7.5mm间距 Pitch: 7.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	15	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-POX7.5HXX-0001	2-12
MC-POY7.5HXX-0001	2-12

附件Accessory	

MC-POX7.5HXX-0001



MC-POY7.5HXX-0001



7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	30-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	30-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-RE7.62VXXC-0001	2-24
MC-RE7.62VXXC-K-0001	2-24
MC-RE7.62VXXC-I-0001	2-24
MC-RE7.62VXXC-R-0001	2-24
MC-RE7.62VXXC-RK-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-RE7.62VXXC-0001



MC-RE7.62VXXC-K-0001



MC-RE7.62VXXC-I-0001



MC-RE7.62VXXC-R-0001



MC-RE7.62VXXC-RK-0001

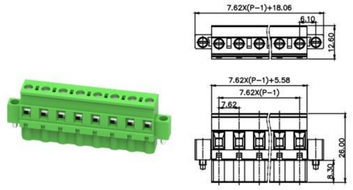

7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RJ7.62HXXP-0001	2-24
MC-RJ7.62HXXP-K-0001	2-24
MC-RJ7.62HXXP-I-0001	2-24

附件Accessory	
MC-R-MSTB	

MC-RJ7.62HXXP-0001



MC-RJ7.62HXXP-K-0001



MC-RJ7.62HXXP-I-0001



7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	18	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PA7.62HXX-0002	2-24
MC-PA7.62HXX-F-0002	2-24
MC-PA7.62HXX-G-0002	2-24
MC-PA7.62HXX-I-0002	2-24

订货号/通道数 Order /Poles No.	
MC-PA7.62VXX-0002	2-24
MC-PA7.62VXX-F-0002	2-24
MC-PA7.62VXX-G-0002	2-24
MC-PA7.62VXX-I-0002	2-24

MC-PA7.62HXX-0002

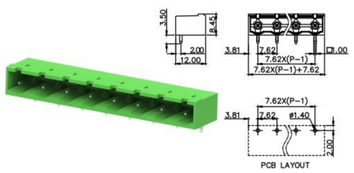

MC-PA7.62HXX-F-0002

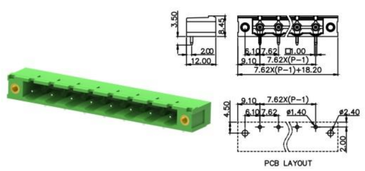

MC-PA7.62HXX-G-0002

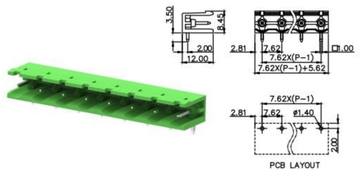

MC-PA7.62VXX-0002



MC-PA7.62VXX-F-0002

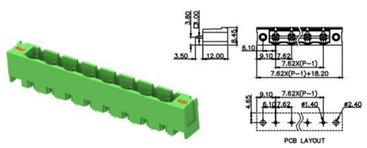

MC-PA7.62VXX-G-0002

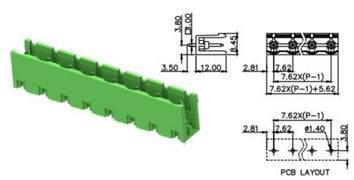

7.62mm间距 Pitch: 7.62mm

附件Accessory	
MC-P-MSTB	

MC-PA7.62HXX-I-0002

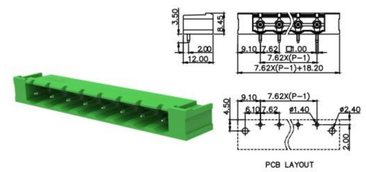

MC-PA7.62VXX-I-0002

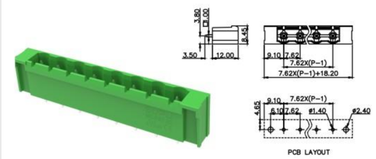

7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	10
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M2.5
扭矩 Torque	[N·m]	0.3
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
MC-PB7.62HXXC-0001	2-24
MC-PB7.62HXXC-F-0001	2-24
MC-PB7.62HXXC-K-0001	2-24
MC-PB7.62HXXC-I-0001	2-24

订货号/通道数 Order /Poles No.	
MC-PB7.62HXXC-B-0001	2-24
MC-PB7.62HXXC-FB-0001	2-24
MC-PB7.62HXXC-IB-0001	2-24

MC-PB7.62HXXC-0001

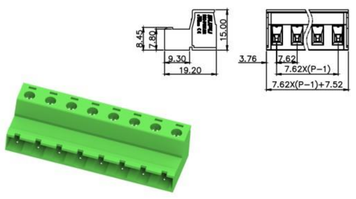

MC-PB7.62HXXC-F-0001



MC-PB7.62HXXC-K-0001

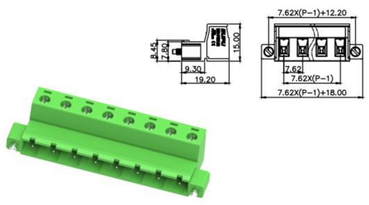

MC-PB7.62HXXC-KB-0001



MC-PB7.62HXXC-IB-0001



7.62mm间距 Pitch: 7.62mm

附件Accessory	
MC-P-MSTB	

MC-PB7.62HXXC-I-0001



MC-PB7.62HXXC-B-0001



MC-PB7.62HXXC-FB-0001



7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	41
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-8
柔性导线截面积 Flexible	[mm²][AWG]	0.2-6.0	24-8
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M3
扭矩 Torque	[N·m]	0.5
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RHH7.62HXXC-0001	2-12
MC-RHH7.62HXXC-K-0001	2-12

附件Accessory	
MC-R-RH7.62	

MC-RHH7.62HXXC-0001

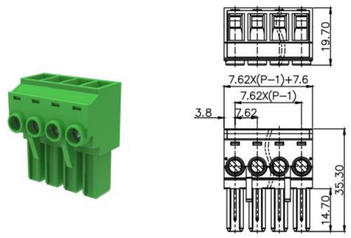

MC-RHH7.62HXXC-K-0001

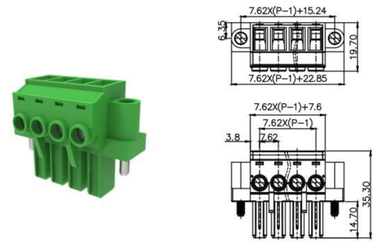

7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	35
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.2-10	24-8
柔性导线截面积 Flexible	[mm²][AWG]	0.2-6	24-8
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		M3
扭矩 Torque	[N·m]	4.43
剥线长度 Strip length	[mm]	13-15

订货号/通道数 Order /Poles No.	
MC-RQ7.62HXXP-0001	1-16
MC-RQ7.62HXXP-K-0001	1-16

附件Accessory	

MC-RQ7.62HXXP-0001

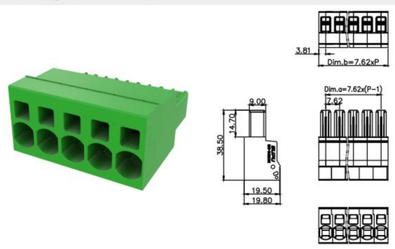

MC-RQ7.62HXXP-K-0001

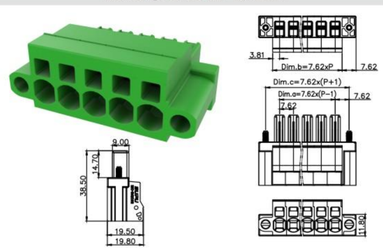

7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	20	20
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-4.0	-
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M3
扭矩 Torque	[N·m]	0.5
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-RH7.62HXX-0001	2-12
MC-RH7.62HXX-K-0001	2-12

附件Accessory	
MC-R-RH7.62	

MC-RH7.62HXXC-0001



MC-RH7.62HXXC-K-0001

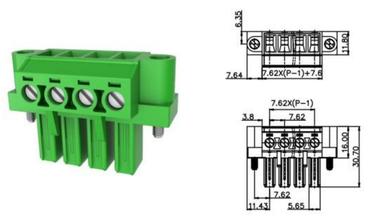

7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	35
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.2-10	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-10	-
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	13-15

订货号/通道数 Order /Poles No.	
MC-PQ7.62HXXP-0001	2-16
MC-PQ7.62HXXP-F-0001	2-16
MC-PQ7.62HXXP-B-0001	2-16
MC-PQ7.62HXXP-I-0001	2-16

附件Accessory	
MC-R-RH7.62	

MC-PQ7.62HXXP-0001

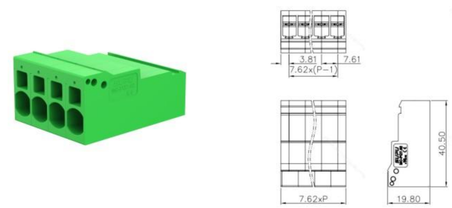

MC-PQ7.62HXXP-F-0001

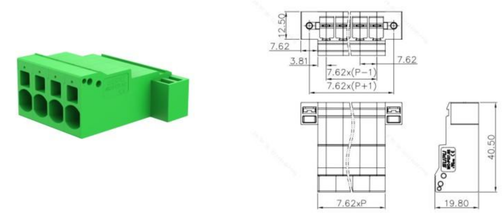

MC-PQ7.62HXXP-B-0001

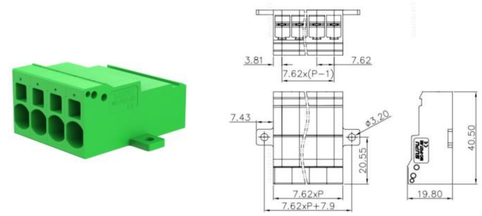

MC-PQ7.62HXXP-I-0001

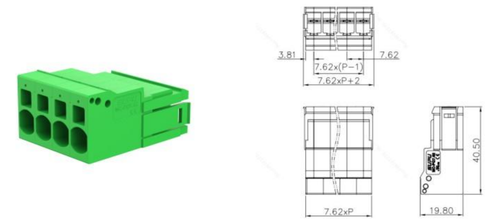

7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	20	20
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M3
扭矩 Torque	[N·m]	0.5
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PH7.62HXX-0001	2-12
MC-PH7.62HXX-F-0001	2-12
MC-PH7.62VXX-0001	2-12
MC-PH7.62VXX-F-0001	2-12

附件Accessory	
MC-R-RH7.62	

MC-PH7.62HXX-0001

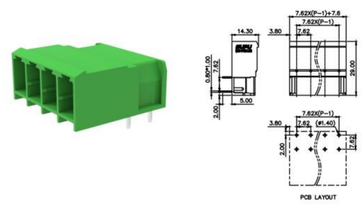

MC-PH7.62HXX-F-0001

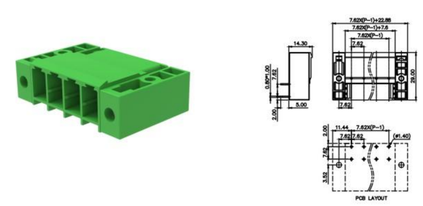

MC-PH7.62VXX-0001

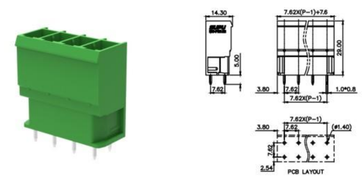

MC-PH7.62VXX-F-0001

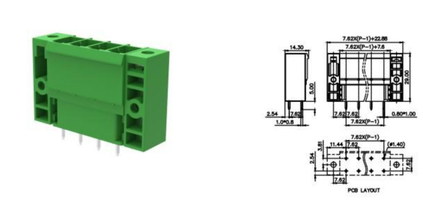

7.62mm间距 Pitch: 7.62mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	41
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M3
扭矩 Torque	[N·m]	0.5
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PHH7.62HXX-0001	2-12
MC-PHH7.62HXX-I-0001	2-12
MC-PHH7.62HXX-F-0001	2-12
MC-PHH7.62HXX-F-0030	2-12

订货号/通道数 Order /Poles No.	
MC-PHH7.62VXX-0001	2-12
MC-PHH7.62VXX-I-0001	2-12
MC-PHH7.62VXX-F-0001	2-12
MC-PHH7.62VXX-F-0030	2-12

附件Accessory	
MC-R-RH7.62	

MC-PHH7.62HXX-0001



MC-PHH7.62HXX-I-0001

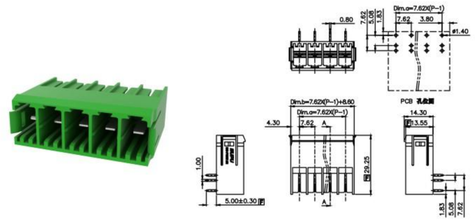

MC-PHH7.62VXX-0001

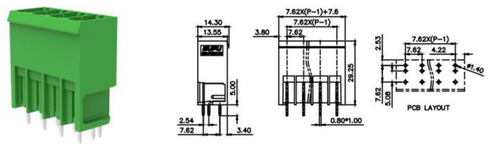

MC-PHH7.62VXX-I-0001

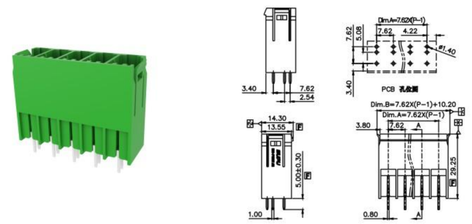

10.16mm间距 Pitch: 10.16mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	76	55
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.5-16	20-6
柔性导线截面积 Flexible	[mm²][AWG]	0.5-16	20-6
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M4
扭矩 Torque	[N·m]	1.2
固定螺钉 Fixed screw		M3
扭矩 Torque	[N·m]	0.5
剥线长度 Strip length	[mm]	12

订货号/通道数 Order /Poles No.	
MC-RHH10.16HXXC-0001	2-12
MC-RHH10.16HXXC-K-0001	2-12

附件Accessory	

MC-RHH10.16HXXC-0001

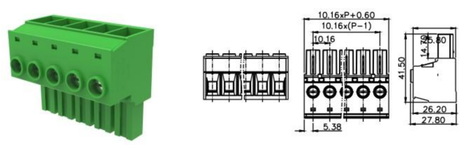

MC-RHH10.16HXXC-K-0001

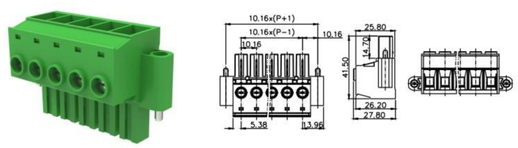

7.62mm间距 Pitch: 7.62mm

MC-PHH7.62HXX-F-0001



MC-PHH7.62HXX-F-0030

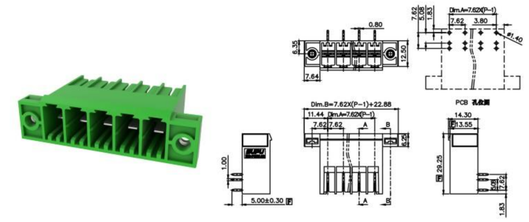

MC-PHH7.62VXX-F-0001

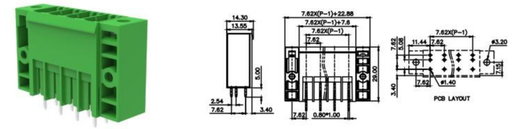

MC-PHH7.62VXX-F-0030

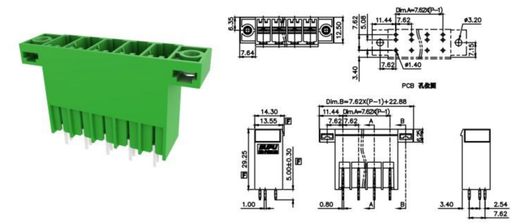

10.16mm间距 Pitch: 10.16mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	76	66
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		M3
扭矩 Torque	[N·m]	0.5
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
MC-PH10.16HXX-0001	2-12
MC-PH10.16HXX-F-0001	2-12
MC-PH10.16VXX-0001	2-12
MC-PH10.16VXX-F-0001	2-12

附件Accessory	

MC-PH10.16HXX-0001

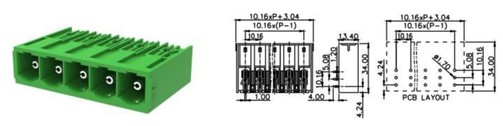

MC-PH10.16HXX-F-0001

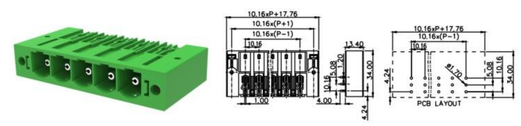

MC-PH10.16VXX-0001

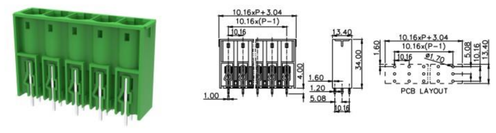

MC-PH10.16VXX-F-0001

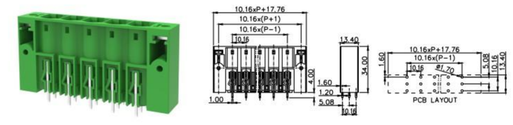

2.54mm间距 Pitch: 2.54mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	6	2
额定电压 Rated voltage	[V]	130	150
硬导线截面积 Solid	[mm²][AWG]	0.2-1.0	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.0	-
额定冲击电压 Rated impulse voltage	[KV]	1.25	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	18-20

订货号/通道数 Order /Poles No.	
MC-TC2.54HXXP-N-0001	1-24
MC-TC2.54VXXP-N-0001	1-24

附件Accessory	

MC-TC2.54HXXP-N-0001



MC-TC2.54VXXP-N-0001



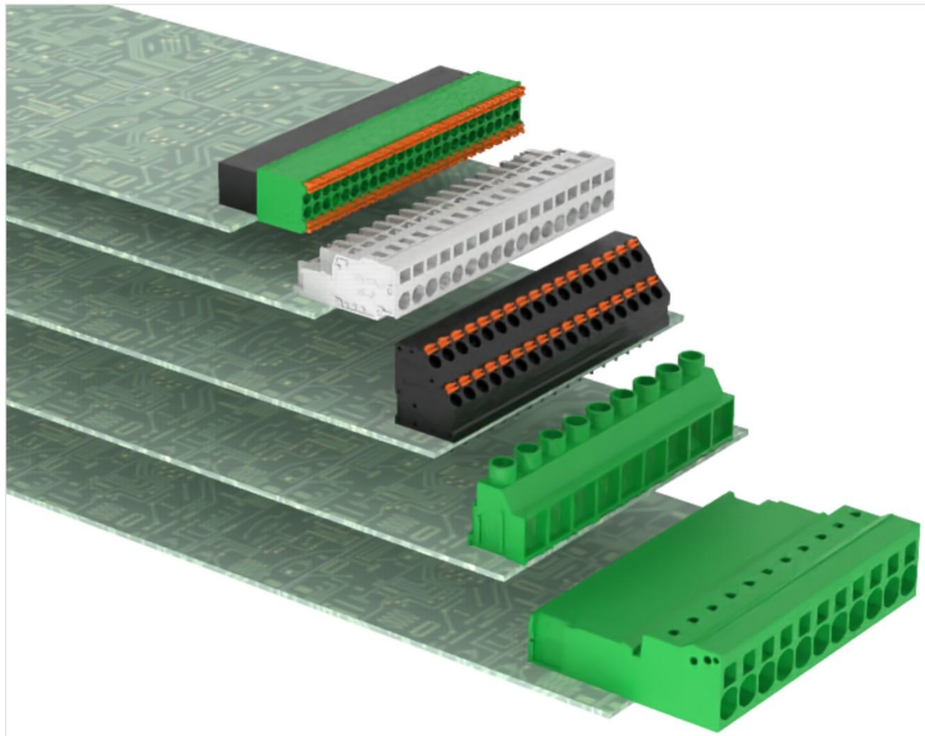

3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	12
额定电压 Rated voltage	[V]	200	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TI3.5HXXP-BK-0001	2-24
MC-TI3.5HXXP-BK-1600	2-24
MC-TI3.5VXXP-BK-0001	2-24
MC-TI3.5VXXP-BK-1600	2-24

附件Accessory	

MC-TI3.5HXXP-BK-0001





MC-TI3.5HXXP-BK-1600



MC-TI3.5VXXP-BK-0001



MC-TI3.5VXXP-BK-1600



3.5mm间距 Pitch: 3.5mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TI3.5HXXP-BK-0001-SMT	2-24
MC-TI3.5VXXP-BK-0001-SMT	2-24

附件Accessory	

MC-TI3.5HXXP-BK-0001-SMT



MC-TI3.5VXXP-BK-0001-SMT



3.81mm间距 Pitch: 3.81mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5

订货号/通道数 Order /Poles No.	
MC-TM3.81HXXC-0001	2-24

附件Accessory	

MC-TM3.81HXXC-0001





3.81mm间距 Pitch: 3.81mm

MC-DTM3.81HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5

订货号/通道数 Order /Poles No.	
MC-DTM3.81HXXC-0001	2-24

附件Accessory



3.81mm间距 Pitch: 3.81mm

MC-TTM3.81HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5

订货号/通道数 Order /Poles No.	
MC-TTM3.81HXXC-0001	2-24

附件Accessory



3.81mm间距 Pitch: 3.81mm

MC-TM3.81BXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	200	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	4-5

订货号/通道数 Order /Poles No.	
MC-TM3.81BXXC-0001	2P-12P

附件Accessory



3.81mm间距 Pitch: 3.81mm

MC-TE3.81HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	12
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.	
MC-TE3.81HXXC-0001	2-24

附件Accessory





3.81mm间距 Pitch: 3.81mm

MC-TEH3.81HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	12
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.	
MC-TEH3.81HXXC-0001	2-24

附件Accessory



3.81mm间距 Pitch: 3.81mm

MC-DTEH3.81HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	12
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		M2
扭矩 Torque	[N·m]	0.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.	
MC-DTEH3.81HXXC-0001	2-24

附件Accessory





5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	12
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TI5.0HXXP-BK-0001	2-24
MC-TI5.0HXXP-BK-1600	2-24
MC-TI5.0VXXP-BK-0001	2-24
MC-TI5.0VXXP-BK-1600	2-24

附件Accessory

MC-TI5.0HXXP-BK-0001



MC-TI5.0HXXP-BK-1600



MC-TI5.0VXXP-BK-0001



MC-TI5.0VXXP-BK-1600



5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	12
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TI5.0HXXP-BK-0001-SMT	2-24
MC-TI5.0VXXP-BK-0001-SMT	2-24

附件Accessory

MC-TI5.0HXXP-BK-0001-SMT



MC-TI5.0VXXP-BK-0001-SMT



5.0mm间距 Pitch: 5.0mm

MC-TE5.0HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	14	13.5
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.

MC-TE5.0HXXC-0001	2-24

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-TEH5.0HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	13.5	13.5
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	30-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	30-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.

MC-TEH5.0HXXC-0001	2-24

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-DTE5.0HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	14	13.5
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.

MC-DTE5.0HXXC-0001	2-24

附件Accessory





5.0mm间距 Pitch: 5.0mm

MC-TD5.0HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TD5.0HXXC-0001	2-24

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-TD5.0AXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TD5.0AXXC-0001	2-24

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-DTD5.0HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-DTD5.0HXXC-0001	4-48

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-TF5.0HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TF5.0HXXC-0001	2-24

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-TF5.0AXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TF5.0AXXC-0001	2-24

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-DTF5.0HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-DTF5.0HXXC-0001	4-48

附件Accessory



5.0mm间距 Pitch: 5.0mm

MC-TC5.0VXXP-N-GY-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.

MC-TC5.0VXXP-N-GY-0001	1P-12P

附件Accessory



5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TC5.0VXXP-0001	1-12
MC-TC5.0HXXP-0001	1-12

附件Accessory	

MC-TC5.0VXXP-0001

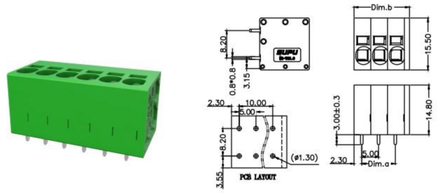

MC-TC5.0HXXP-0001

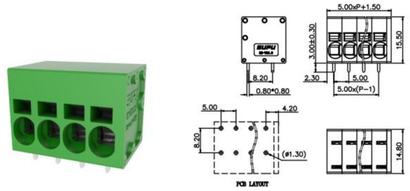

5.0mm间距 Pitch: 5.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	9-10

订货号/通道数 Order /Poles No.	
MC-TP/B5.0AXXP-BK-0001	2-24
MC-TP/F5.0AXXP-BK-0001	2-24
MC-DTP5.0AXXP-BK-0001	4-48
MC-TTP5.0AXXP-BK-0001	6-72
MC-FTP5.0AXXP-BK-0001	8-96

附件Accessory	

MC-TP/B5.0AXXP-BK-0001



MC-TP/F5.0AXXP-BK-0001



MC-DTP5.0AXXP-BK-0001



MC-TTP5.0AXXP-BK-0001



MC-FTP5.0AXXP-BK-0001



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	-
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	9-10

订货号/通道数 Order /Poles No.	
MC-TX5.08VXXP-0001	2-24

附件Accessory	

MC-TX5.08VXXP-0001

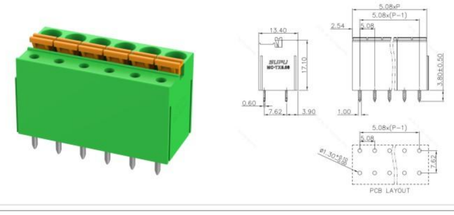

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	20	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-TC5.08AXXP-0001	2-24

附件Accessory	

MC-TC5.08AXXP-0001

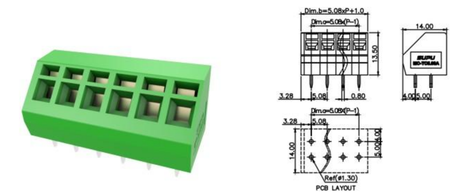

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	20	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.	
MC-DTC5.08AXXP-0001	4-48

附件Accessory	

MC-DTC5.08AXXP-0001

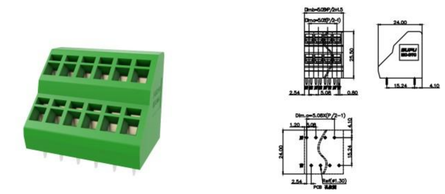

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	14	13.5
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.	
MC-TE5.08HXXC-0001	2-24

附件Accessory	

MC-TE5.08HXXC-0001

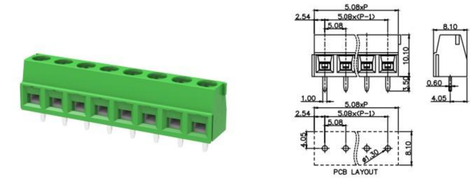

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	13.5	13.5
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	30-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	30-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.	
MC-TEH5.08HXXC-0001	2-24

附件Accessory	

MC-TEH5.08HXXC-0001

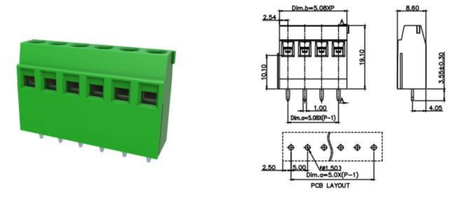

5.08mm间距 Pitch: 5.08mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	13.5
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.	
MC-TE5.08AXXC-0001	2-24

附件Accessory	

MC-TE5.08AXXC-0001

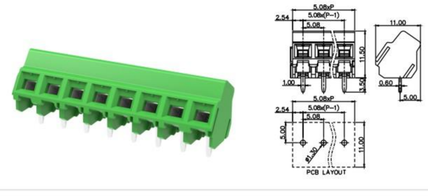

5.08mm间距 Pitch: 5.08mm

MC-TE5.08BXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	13.5	10
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.

MC-TE5.08BXXC-0001	2P-24P

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-DTE5.08HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	14	13.5
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	6-7

订货号/通道数 Order /Poles No.

MC-DTE5.08HXXC-0001	2-24

附件Accessory





5.08mm间距 Pitch: 5.08mm

MC-TD5.08HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TD5.08HXXC-0001	2-24

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-TD5.08AXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	250
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TD5.08AXXC-0001	2-24

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-DTD5.08HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-DTD5.08HXXC-0001	2-24

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-TTD5.08HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5-0.6
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TTD5.08HXXC-0001	6-72

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-TF5.08HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TF5.08HXXC-0001	2-24

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-TF5.08AXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TF5.08AXXC-0001	2-24

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-TF5.08CXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	20	10
额定电压 Rated voltage	[V]	400	250
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	10-11

订货号/通道数 Order /Poles No.

MC-TF5.08CXXC-0001	2-24

附件Accessory



5.08mm间距 Pitch: 5.08mm

MC-DTF5.08HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	400	125
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-DTF5.08HXXC-0001	2-24

附件Accessory





5.08mm间距 Pitch: 5.08mm

MC-TTF5.08HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	10
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TTF5.08HXXC-0001	6P-72P

附件Accessory

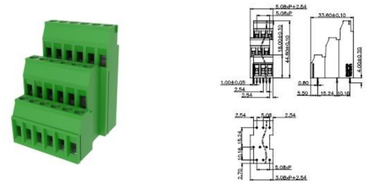

5.08mm间距 Pitch: 5.08mm

MC-TC5.08VXXP-N-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	15	10
额定电压 Rated voltage	[V]	400	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4	-

产品信息Product Information

锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10

订货号/通道数 Order /Poles No.

MC-TC5.08VXXP-N-0001	1P-54P

附件Accessory

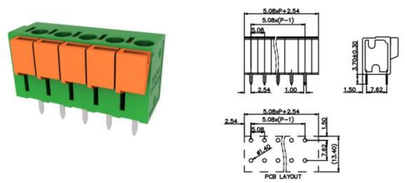

6.35mm间距 Pitch: 6.35mm

MC-TG6.35HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	30
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information

锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.

MC-TG6.35HXXC-0001	2P-12P

附件Accessory



6.35mm间距 Pitch: 6.35mm

MC-TH/F6.35HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	30
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information

锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.

MC-TH/F6.35HXXC-0001	1P-12P

附件Accessory

7.5mm间距 Pitch: 7.5mm

MC-TH7.5HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	30
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information

锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.

MC-TH7.5HXXC-0001	2P-12P

附件Accessory

7.5mm间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	36
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.2-10	24-8
柔性导线截面积 Flexible	[mm²][AWG]	0.2-6	24-8
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information

锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	13-15

订货号/通道数 Order /Poles No.

MC-TC7.5HXXP-0001	1P-16
MC-TC/B7.5HXXP-0001(W针脚)	1P-16
TC/B7.5HXXP-0001(M针脚)	1P-16
MC-TC7.5VXXP-0001	1P-16
MC-TC/F7.5VXXP-0001（W针脚）	1P-16
MC-TC/F7.5VXXP-0001（M针脚）	1P-16

附件Accessory

MC-TC7.5HXXP-0001



MC-TC/B7.5HXXP-0001(W针脚)

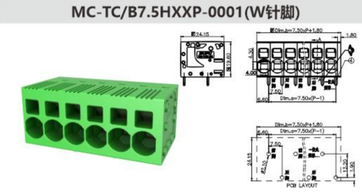

TC/B7.5HXXP-0001(M针脚)



MC-TC7.5VXXP-0001



MC-TC/F7.5VXXP-0001（W针脚）



MC-TC/F7.5VXXP-0001（M针脚）



7.62mm间距 Pitch: 7.62mm

MC-TC7.62VXXP-N-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	15	10
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information

锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10

订货号/通道数 Order /Poles No.

MC-TC7.62VXXP-N-0001	1P-24P

附件Accessory

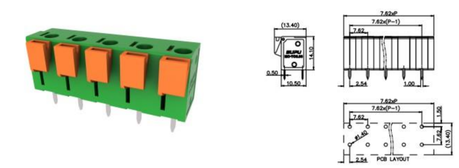

7.62mm间距 Pitch: 7.62mm

MC-TD7.62HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	630	250
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information

锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TD7.62HXXC-0001	2P-16P

附件Accessory

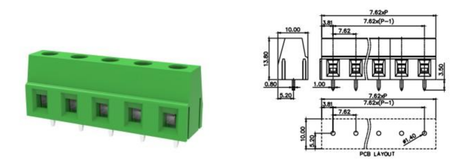

7.62mm间距 Pitch: 7.62mm

MC-TF7.62HXXC-0001

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	15
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information

锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.

MC-TF7.62HXXC-0001	2P-24P

附件Accessory

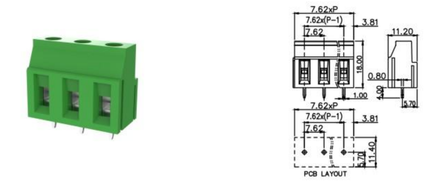

7.62mm间距 Pitch: 7.62mm

MC-TG7.62HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	30
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TG7.62HXXC-0001	2P-12P

附件Accessory	



9.52mm间距 Pitch: 9.52mm

MC-TG9.52HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	30
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	6	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TG9.52HXXC-0001	2P-12P

附件Accessory	



9.52mm间距 Pitch: 9.52mm

MC-TH9.52HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	30
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TH9.52HXXC-0001	2P-12P

附件Accessory	



9.52mm间距 Pitch: 9.52mm

MC-TH/F9.52HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	30
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M3
扭矩 Torque	[N·m]	0.5
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
MC-TH/F9.52HXXC-0001	2P-12P

附件Accessory	





10.16mm间距 Pitch: 10.16mm

MC-TJ10.16HXXC-0001

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	57	65
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.5-16	20-6
柔性导线截面积Flexible	[mm²][AWG]	0.5-16	20-6
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M4
扭矩 Torque	[N·m]	1.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	11-12

订货号/通道数 Order /Poles No.	
MC-TJ10.16HXXC-0001	2P-12P

附件Accessory	



10.16mm间距 Pitch: 10.16mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	76	60
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.5-16	20-6
柔性导线截面积 Flexible	[mm²][AWG]	0.5-16	20-6
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M4
扭矩 Torque	[N·m]	1.2
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	10-12

订货号/通道数 Order /Poles No.	
MC-TH10.16HXXC-0001	2-12
MC-TH/B10.16H01C-0001	1
MC-TH/F10.16H01C-0001	1

附件Accessory	

MC-TH10.16HXXC-0001



MC-TH/B10.16H01C-0001



MC-TH/F10.16H01C-0001



15.0mm间距 Pitch: 15.0mm

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	125	115
额定电压 Rated voltage	[V]	1000	600
硬导线截面积 Solid	[mm²][AWG]	0.5-35	20-2
柔性导线截面积 Flexible	[mm²][AWG]	0.5-35	-
额定冲击电压 Rated impulse voltage	[KV]	8	-

产品信息Product Information		
锁线螺钉 Locking crew		M5
扭矩 Torque	[N·m]	2.0
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	18-19

订货号/通道数 Order /Poles No.	
MC-TK15HXXC-0001	2-9
MC-TK15H01C-BL-0001	1
MC-TK15H01C-BR-0001	1

附件Accessory	

MC-TK15HXXC-0001



MC-TK15HXXC-B-0001



MC-TK15H01C-BL-0001



MC-TK15H01C-BR-0001



235系列单孔PCB端子排 235 Series single hole PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	9-10	

订货号/通道数 Order /Poles No.

2352XX/010	2-24	2352XX	2-24

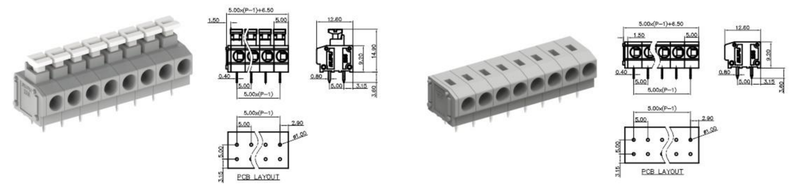

235系列单孔PCB端子排 235 Series single hole PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	10
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-14
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	9-10	

订货号/通道数 Order /Poles No.

2353XX/010	2-24	2353XX	2-24

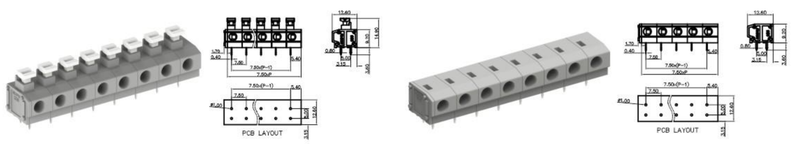

235系列单孔PCB端子排 235 Series single hole PCB terminal block 间距 Pitch: 10.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	10
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-14
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	24-14
额定冲击电压 Rated impulse voltage	[KV]	8.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	9-10	

订货号/通道数 Order /Poles No.

2354XX/010	2-24	2354XX	2-24

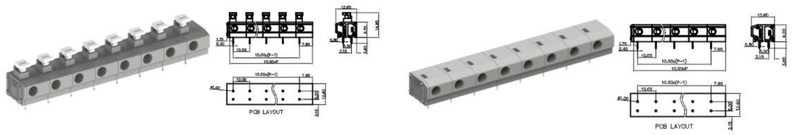

239系列单孔PCB端子排 239 Series single hole PCB terminal block 间距 Pitch: 3.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	6
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-14
柔性导线截面积Flexible	[mm²][AWG]	0.2-1.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	2.5	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2393XX/010	2-24	2393XX	2-24

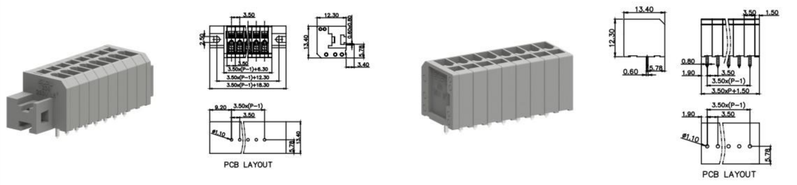

239系列单孔PCB端子排 239 Series single hole PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	12
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/通道数 Order /Poles No.

2391XX	2-24

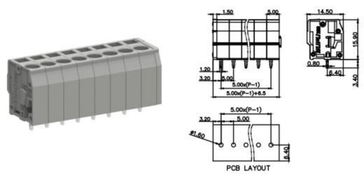

239系列单孔PCB端子排 239 Series single hole PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	12
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/通道数 Order /Poles No.

2392XX	2-24

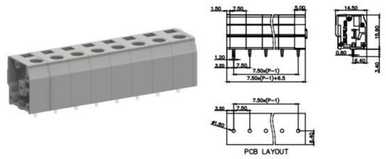

239系列单孔PCB端子排 239 Series single hole PCB terminal block 间距 Pitch: 5.08mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	12
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/通道数 Order /Poles No.

23915X	2-24

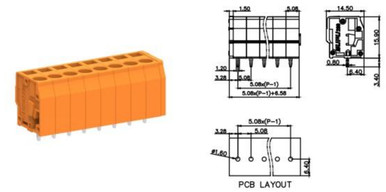

239系列单孔PCB端子排 239 Series single hole PCB terminal block 间距 Pitch: 7.62mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	12
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/通道数 Order /Poles No.

23925X	2-24

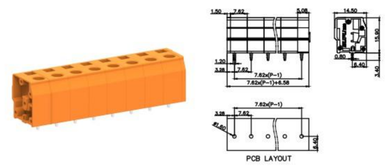

245系列PCB端子排 245 Series PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	28-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/通道数 Order /Poles No.

2452XX/020	2-24	2452XX	2-24

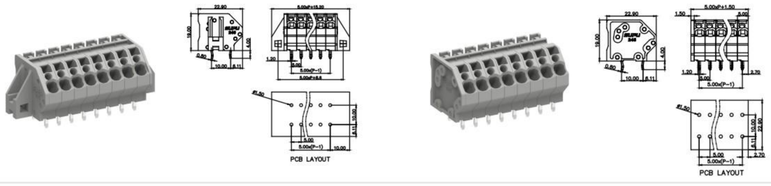

245系列PCB端子排 245 Series PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	28-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	28-12
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/通道数 Order /Poles No.

2453XX/020	2-24	2453XX	2-24

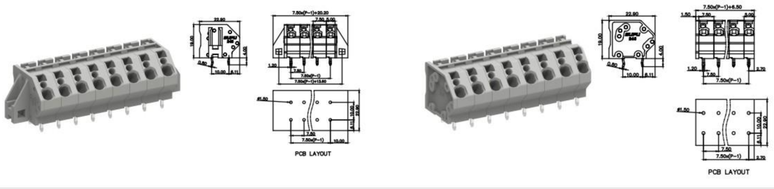

245系列PCB端子排 245 Series PCB terminal block 间距 Pitch: 10.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	28-12
柔性导线截面积flexible	[mm²][AWG]	0.2-4.0	28-12
额定冲击电压 Rated impulse voltage	[KV]	8.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/通道数 Order /Poles No.

2454XX/020	2-24	2454XX	2-24

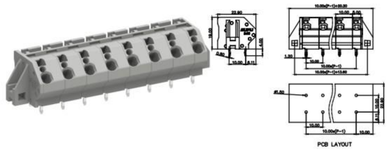

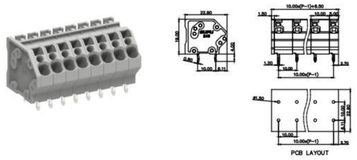

246系列PCB端子排 246 Series PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	30
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	11-12	

订货号/通道数 Order /Poles No.

2463XX/020	2-24	2463XX	2-24

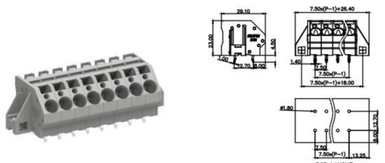

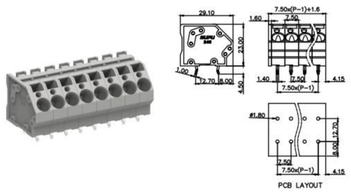

246系列PCB端子排 246 Series PCB terminal block 间距 Pitch: 10.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	30
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积flexible	[mm²][AWG]	0.2-6.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	8.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	11-12	

订货号/通道数 Order /Poles No.

2464XX/020	2-24	2464XX	2-24



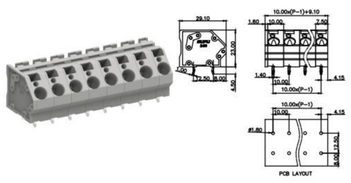

250系列PCB端子排 250 Series PCB terminal block 间距 Pitch: 3.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	8	5
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	24-16
柔性导线截面积flexible	[mm²][AWG]	0.2-1.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8.5-9.5	

订货号/通道数 Order /Poles No.

2501XX	2-24	2502XX	2-24
单排焊针single hole		双排焊针double hole	

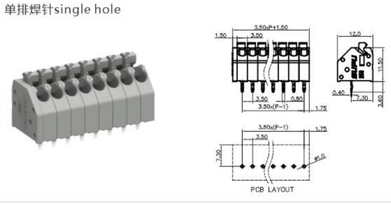

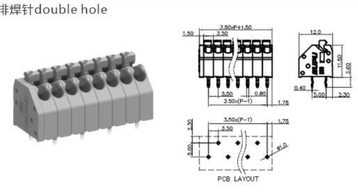

250系列PCB端子排 250 Series PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	17.5	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.5-1.5	20-16
柔性导线截面积flexible	[mm²][AWG]	0.5-1.5	20-16
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	9-10	

订货号/通道数 Order /Poles No.

2505XX	2-24（双层）		

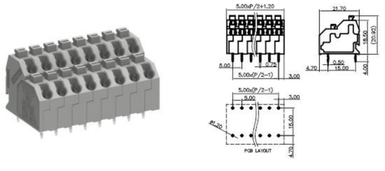

255系列PCB端子排 255 Series PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2554XX	2-24		

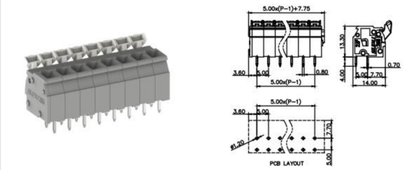

255系列PCB端子排 255 Series PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2555XX	2-24		

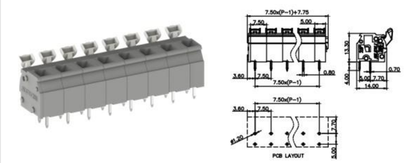

256系列PCB端子排 256 Series PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2563XX	2-24	2567XX	2-24

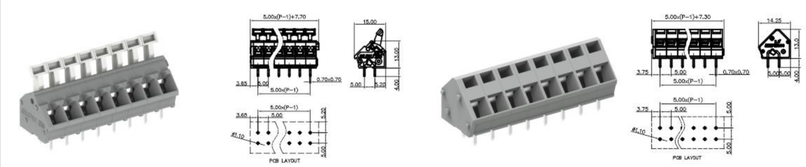

256系列PCB端子排 256 Series PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2564XX	2-24	2568XX	2-24

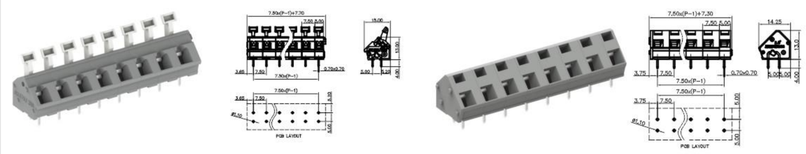

256系列PCB端子排 256 Series PCB terminal block 间距 Pitch: 10.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	8.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2569XX	2-24	2464XX	2-24

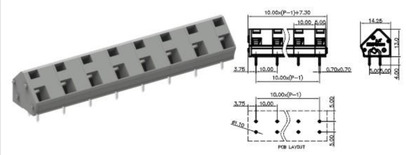

257系列PCB端子排 257 Series PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	21	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-14
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-14
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2572XX	2-24（双层）



257系列PCB端子排 257 Series PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	21	10
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-14
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2573XX	2-24（双层）



246系列PCB端子排 246 Series PCB terminal block 间距 Pitch: 10.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	21	10
额定电压 Rated voltage	[V]	1000	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	24-14
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	24-14
额定冲击电压 Rated impulse voltage	[KV]	8.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2574XX	2-24（双层）



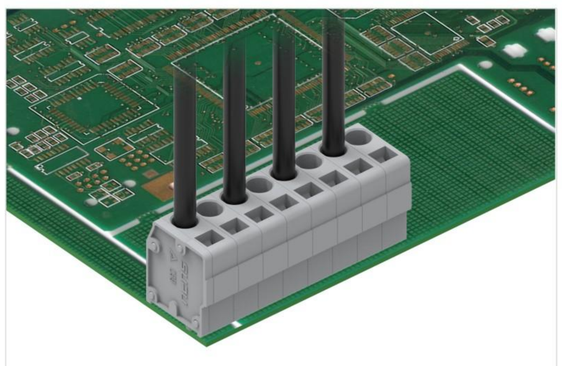

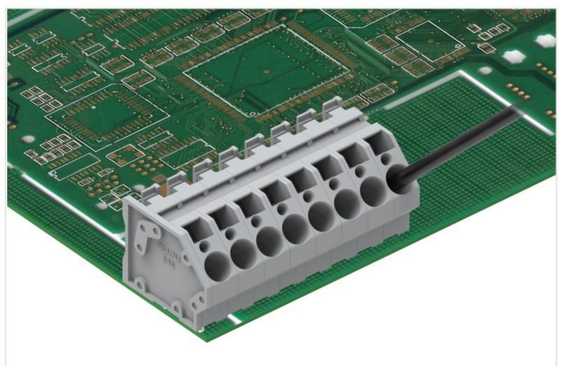

258系列PCB端子排 258 Series PCB terminal block 间距 Pitch: 5.0mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	21	10
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	26-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	26-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2582XX	2-24（三层）



258系列PCB端子排 258 Series PCB terminal block 间距 Pitch: 7.5mm

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	10
额定电压 Rated voltage	[V]	630	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	26-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-2.5	26-12
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	5-6	

订货号/通道数 Order /Poles No.

2583XX	2-24（三层）



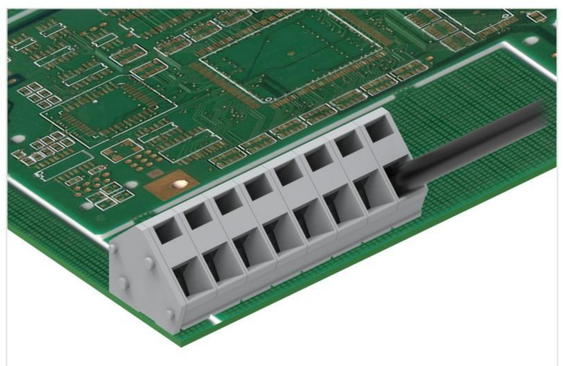

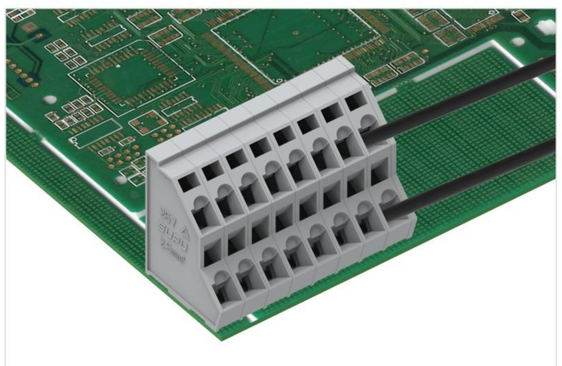

MCS连接器选型配比表
MCS connector selection ratio table

订货号 Order No.	Pin 间距	4251XX	4351XX 4351XX/050	4355XX 4355XX/030	4381XX 4381XX/050	4501XX 4501XX/010 4501XX/030 4501XX/050	45015X 45015X/010 45015X/030	45025X 45025X/110	45035X	4506XX 4506XX/010 4506XX/030 4506XX/050
		2.5	3.5	3.5	3.81	5.0	5.0	5.0	5.0	5.0
4252XX	2.5	●								
4253XX	2.5	●								
4254XX	2.5	●								
4352XX	3.5		●							
4353XX	3.5		●							
4354XX 4354XX/010	3.5		●	●						
4355XX 4355XX/030	3.5		●	●						
4358XX	3.5		●							
4382XX	3.81				●					
4383XX	3.81				●					
4384XX 4384XX/010	3.81				●					
4502XX-XXD 4502XX/110	5.0					●				
4503XX-XXD	5.0					●	●			
4504XX 4504XX/010 4504XX/030	5.0					●	●	●	●	
4504XX/060	5.0					●				
4507XX-XXD 4507XX/110	5.0									●
4508XX	5.0									●
4509XX 4509XX/010 4509XX/030	5.0									●
4509XX/060	5.0									●
4582XX-XXD	5.08									
4583XX-XXD	5.08									
4584XX 4584XX/010 4584XX/030	5.08									
4584XX/060	5.08									
4752XX-XXD	7.5									
4753XX-XXD	7.5									

	45065X 45065X/010 45065X/030	45075X 45075X/110	45085X	4581XX 4581XX/010 4581XX/030 4581XX/050	4751XX 4751XX/010 4751XX/030 4751XX/050	47525X	47535X	4756XX 4756XX/010 4756XX/030 4756XX/050	47575X	47585X	4781XX 4781XX/010 4781XX/030 4781XX/050
	5.0	5.0	5.0	5.08	7.5	7.5	7.5	7.5	7.5	7.5	7.62
4252XX											
4253XX											
4254XX											
4352XX											
4353XX											
4354XX 4354XX/010											
4355XX 4355XX/030											
4358XX											
4382XX											
4383XX											
4384XX 4384XX/010											
4502XX-XXD 4502XX/110											
4503XX-XXD											
4504XX 4504XX/010 4504XX/030											
4504XX/060											
4507XX-XXD 4507XX/110											
4508XX	●										
4509XX 4509XX/010 4509XX/030	●	●	●								
4509XX/060											
4582XX-XXD				●							
4583XX-XXD				●							
4584XX 4584XX/010 4584XX/030				●							
4584XX/060				●							
4752XX-XXD					●						
4753XX-XXD					●						

MCS连接器选型配比表
MCS connector selection ratio table

订货号 Order No.	Pin 间距	4251XX	4351XX 4351XX/050	4355XX 4355XX/030	4381XX 4381XX/050	4501XX 4501XX/010 4501XX/030 4501XX/050	45015X 45015X/010 45015X/030	45025X 45025X/110	45035X	4506XX 4506XX/010 4506XX/030 4506XX/050
		2.5	3.5	3.5	3.81	5.0	5.0	5.0	5.0	5.0
4754XX 4754XX/010 4754XX/030	7.5									
4754XX/060	7.5									
4757XX-XXD	7.5									
4758XX-XXD	7.5									
4759XX 4759XX/010 4759XX/030	7.5									
4759XX/060	7.5									
4782XX-XXD	7.62									
4783XX-XXD	7.62									
4784XX 4784XX/010 4784XX/030	7.62									
4784XX/060	7.62									

订货号 Order No.	Pin 间距	45065X 45065X/010 45065X/030	45075X 45075X/110	45085X	4581XX 4581XX/010 4581XX/030 4581XX/050	4751XX 4751XX/010 4751XX/030 4751XX/050	47525X	47535X	4756XX 4756XX/010 4756XX/030 4756XX/050	47575X	47585X	4781XX 4781XX/010 4781XX/030 4781XX/050
		5.0	5.0	5.0	5.08	7.5	7.5	7.5	7.5	7.5	7.5	7.62
4754XX 4754XX/010 4754XX/030	7.5					●	●	●				
4754XX/060	7.5					●						
4757XX-XXD	7.5								●			
4758XX-XXD	7.5								●			
4759XX 4759XX/010 4759XX/030	7.5								●	●	●	
4759XX/060	7.5								●			
4782XX-XXD	7.62											●
4783XX-XXD	7.62											●
4784XX 4784XX/010 4784XX/030	7.62											●
4784XX/060	7.62											●

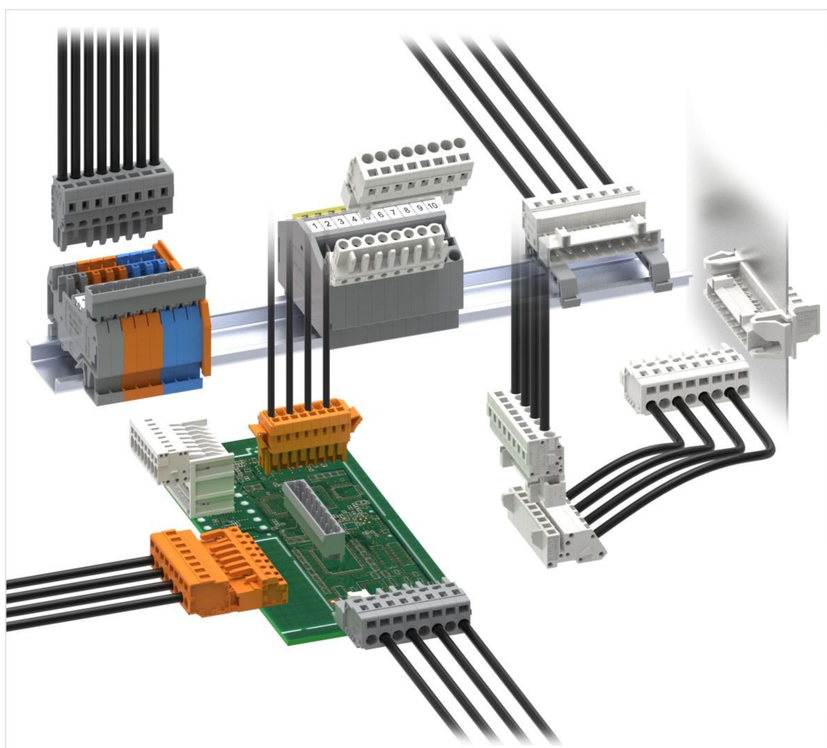

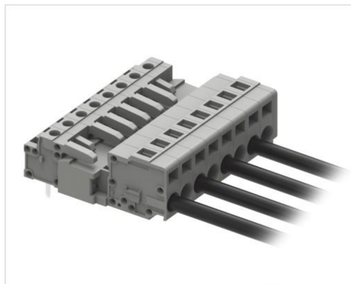

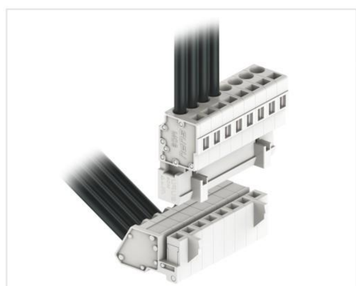

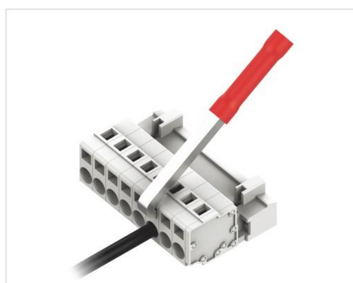

2.5mm间距孔型连接器（防错）2.5mm Female connectors(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	5
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-0.5	28-20
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.5	28-20
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.	
4251XX	2-12
4251XX/050	2-12

附件Accessory	

4251XX

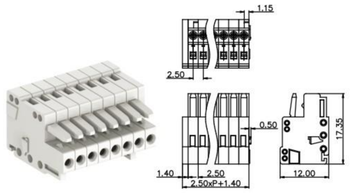

4251XX/050

带卡接钩with locking device

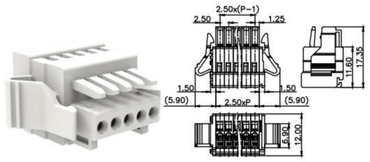

2.5mm间距焊针插座（防错） 2.5mm Solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	5
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4252XX	2-12
4253XX	2-12

附件Accessory	

4252XX

直针型vertical solder pin

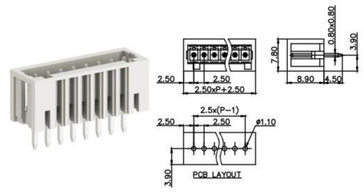

4253XX

弯针型right angle solder pin

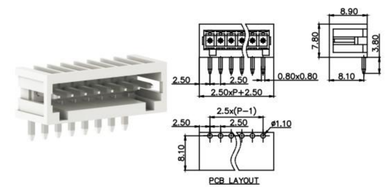

2.5mm间距针型连接器（防错） 2.5mm Male connector with spring-cage clamp (protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	13.5
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-0.5	24-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.	
4254XX	2-12

附件Accessory	

4254XX

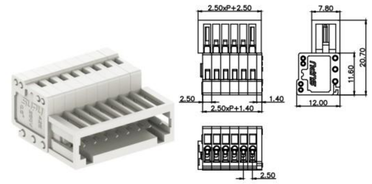

3.5mm间距孔型连接器（防错）3.5mm Female connectors(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
4351XX	2-24
4351XX/050	2-24
4351XX/010	2-24

附件Accessory	
43597X	
43555X	
435013	

4351XX



4351XX/050

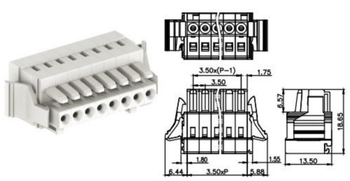

4351XX/010



3.5mm间距焊针插座（防错） 3.5mm Solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4352XX	2-24
4352XX-01D	2-24
4353XX	2-24
4358XX	2-24

附件Accessory	
435015	

4352XX



4352XX-01D



4353XX



4358XX

双层弯针型Double layer right angle solder pin

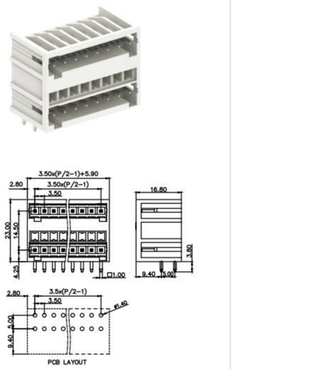

3.5mm间距针型连接器（防错） 3.5mm Male connector with spring-cage clamp (protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
4354XX	2-24
4354XX/010	2-24

附件Accessory	
43597X	
43555X	
435013	

4354XX



4354XX/010

带固定器with fixing flange

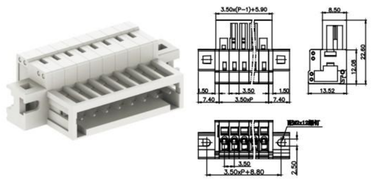

3.5mm间距孔针型连接器（防错） 3.5mm Male connector with spring-cage clamp (protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
4355XX	2-24
4355XX/030	2-24

附件Accessory	

4355XX

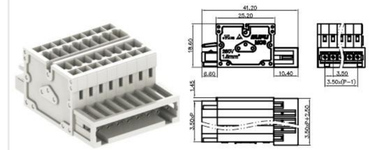

4355XX/030

带销钉with snap in mounting feet

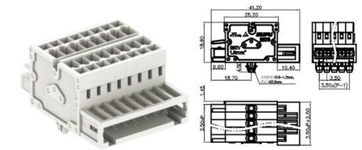

3.81mm间距孔型连接器 3.81mm Female connectors

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
4381XX	2-24
4381XX/050	2-24

附件Accessory	
43897X	
435013	

4381XX

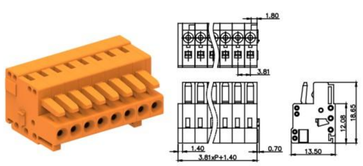

4381XX/050

带卡接钩with locking device

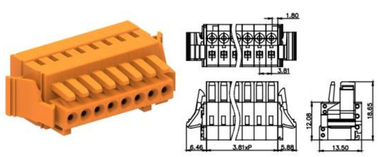

3.81mm间距焊针插座 3.81mm Solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4382XX	2-24
4383XX	2-24

附件Accessory	
435015	

4382XX

直针型vertical solder pin

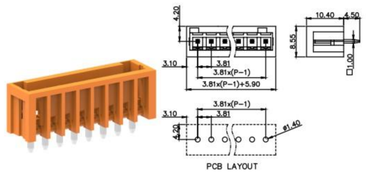

4383XX

弯针型right angle solder pin

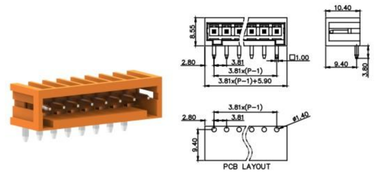

3.81mm间距针型连接器 3.81mm Male connector with spring-cage clamp

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
4384XX	2-24
4384XX/010	2-24

附件Accessory	
43897X	
435013	

4384XX

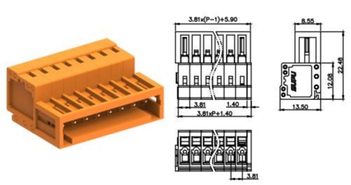

4384XX/010

带固定器with fixing flange

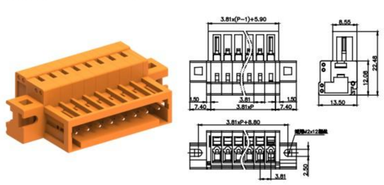

5.0mm间距孔型连接器 5.0mm Female connectors

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4501XX	2-24
4501XX/010	2-24
4501XX/030	2-24
4501XX/050	2-24

附件Accessory	
45097X	450012
4505XX	22533X
450021	
450023	
450014	

4501XX



4501XX/010

带固定器with fixing flange



4501XX/030

带销钉with snap in mounting feet

4501XX/050

带卡接钩with locking device



5.0mm间距焊针插座 5.0mm Solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4502XX	2-24
4502XX/110	2-24
4502XX-01D	2-24
4502XX-03D	2-24

订货号/通道数 Order /Poles No.	
4502XX-04D	2-24
4502XX-05D	2-24
4502XX-06D	2-24
4503XX	2-24

4502XX

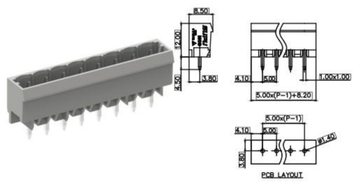

4502XX/110

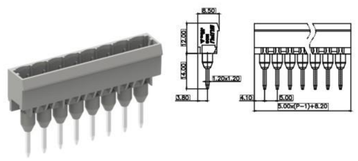

4502XX-01D

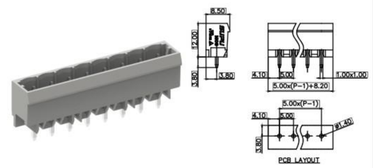

4502XX-06D



4503XX

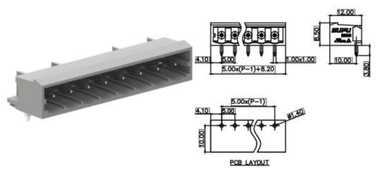

4503XX-00D

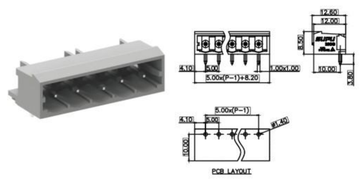

5.0mm间距焊针插座 5.0mm Solder pin

订货号/通道数 Order /Poles No.	
4503XX-00D	2-24
4503XX-03D	2-24
4503XX-04D	2-24

附件Accessory	
450015	

4502XX-03D

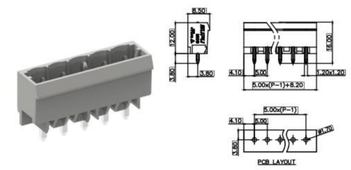

4502XX-04D

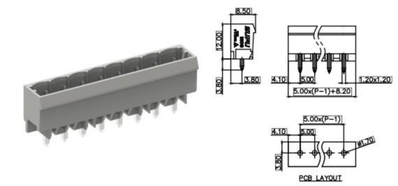

4502XX-05D

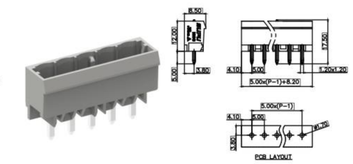

4503XX-03D

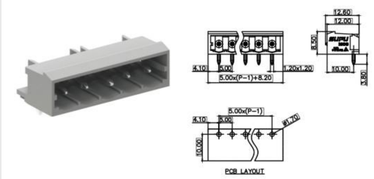

4503XX-04D

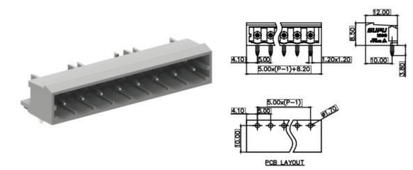

5.0mm间距针型连接器 5.0mm Male connector with spring-cage clamp

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4504XX	2-24
4504XX/010	2-24
4504XX/030	2-24
4504XX/060	2-24

附件Accessory	
45097X	450012
4505XX	22533X
450021	
450023	
450014	

4504XX

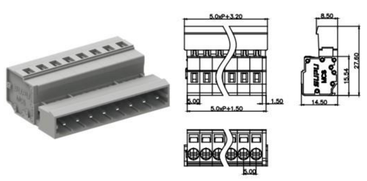

4504XX/010

带固定器with fixing flange

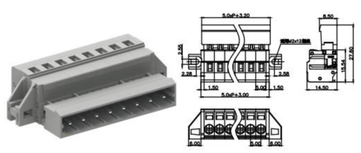

4504XX/030

带销钉with snap in mounting feet

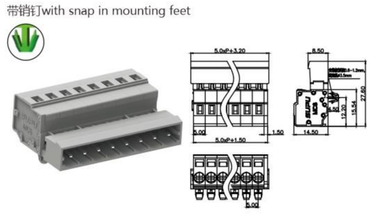

4504XX/060

带穿墙固定器with mounting ears

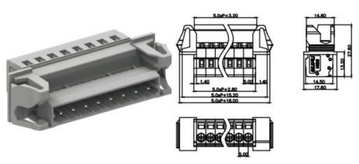

5.0mm间距孔型弯头连接器 5.0mm Female right head connector with spring-cage clamp

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
45015X	2-24
45015X/010	2-24
45015X/030	2-24

附件Accessory	
450021	
450023	
450014	
450012	
22533X	

45015X

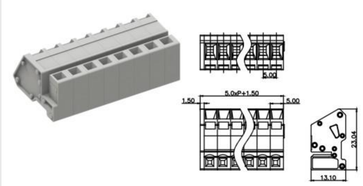

45015X/010

带固定器with fixing flange

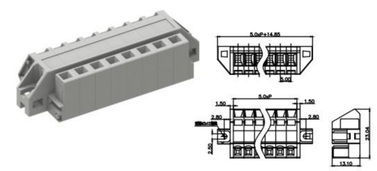

45015X/030

带销钉with snap in mounting feet

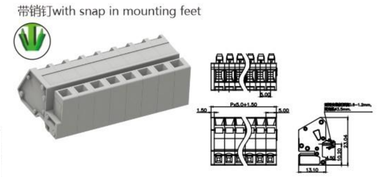

5.0mm间距孔型插头带焊针 5.0mm Female connector with spring-cage clamp with solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	

订货号/通道数 Order /Poles No.	
45025X	2-24
45025X/110	2-24
45035X	2-24

附件Accessory	

45025X

直针型vertical solder pin



45025X/110

长直针型long solder pin



45035X

弯针型right angle solder pin

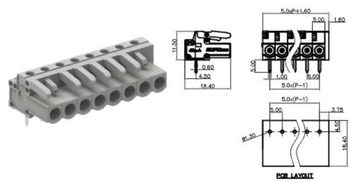

5.0mm间距穿墙式连接器 5.0mm Through-wall connector

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
45046X	2-24
45046X/010	2-24
45043X	2-24
45043X/010	2-24

附件Accessory	
45097X	450012
4505XX	22533X
450021	
450023	
450014	

45046X

直针型vertical solder pin

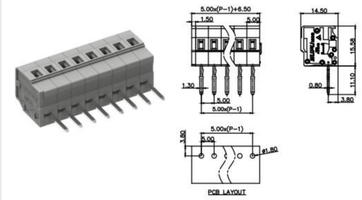

45046X/010

直针型带固定器
vertical solder pin with fixing flange

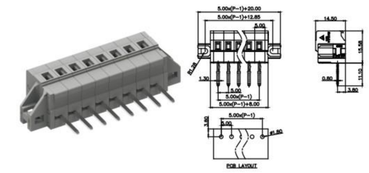

45043X

弯针型with fixing flange

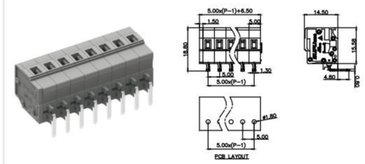

45043X/010

弯针型带固定器
right angle solder pin with fixing flange

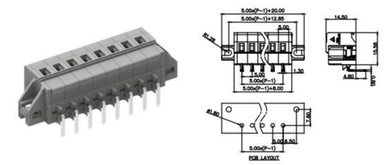

5.0mm间距孔型连接器(防错) 5.0mm Female connectors(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4506XX	2-24
4506XX/010	2-24
4506XX/030	2-24
4506XX/050	2-24

附件Accessory	
45097X	450012
4505XX	22533X
450021	
450023	
450014	

4506XX

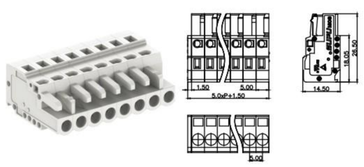

4506XX/010

带固定器with fixing flange

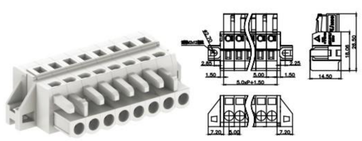

4506XX/030

带销钉with snap in mounting feet

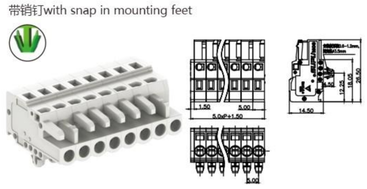

4506XX/050

带卡接钩with locking device

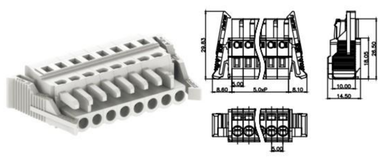

5.0mm间距针型连接器(防错) 5.0mm Male connector with spring-cage clamp (protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4509XX	2-24
4509XX/010	2-24
4509XX/030	2-24
45043X/010	2-24

附件Accessory	
45097X	450012
4505XX	22533X
450021	
450023	
450014	

4509XX

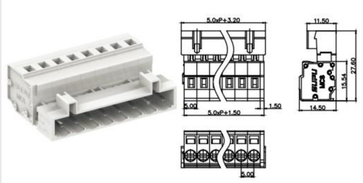

4509XX/010

带固定器with fixing flange

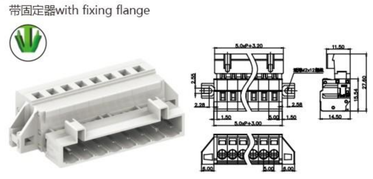

4509XX/030

带销钉with snap in mounting feet

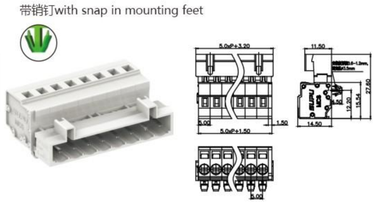

4509XX/060

带穿墙固定器with mounting ears



5.0mm间距焊针插座(防错) 5.0mm Solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4507XX	2-24
4507XX/110	2-24
4507XX-00D	2-24
4507XX-01D	2-24

订货号/通道数 Order /Poles No.	
4507XX-03D	2-24
4507XX-04D	2-24
4507XX-05D	2-24
4507XX-06D	2-24

订货号/通道数 Order /Poles No.	
4508XX	2-24

附件Accessory	
450015	

4507XX

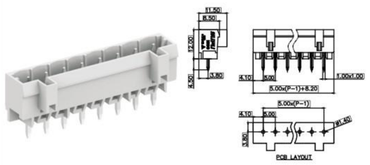

4507XX/110

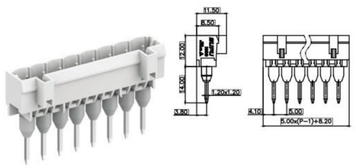

4507XX-00D



4507XX-01D

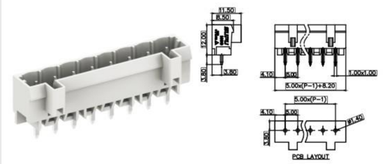

4507XX-03D

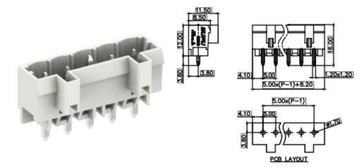

4507XX-04D

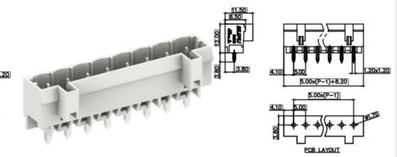

4507XX-05D



4507XX-06D

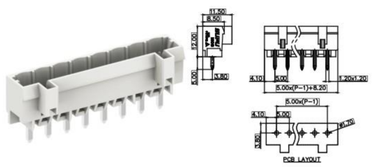

4508XX

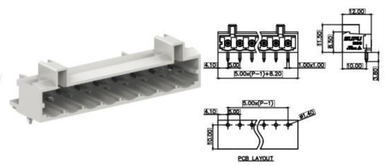

5.0mm间距孔型弯头连接器(防错) 5.0mm Female right head connector with spring-cage clamp (protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
45065X	2-24
45065X/010	2-24
45065X/030	2-24

附件Accessory	
450021	
450023	
450014	
450012	
22533X	

45065X



45065X/010

带固定器with fixing flange



45065X/030

带销钉with snap in mounting feet



5.0mm间距孔型插头带焊针(防错) 5.0mm Female connector with spring-cage clamp with solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
45075X	2-24
45075X/110	2-24
45085X	2-24

附件Accessory	

45075X

直针型vertical solder pin

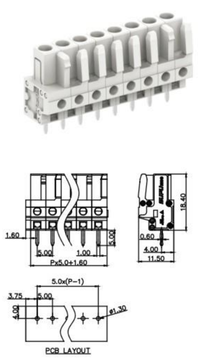

45075X/110

长直针型long solder pin



45085X

弯针型right angle solder pin

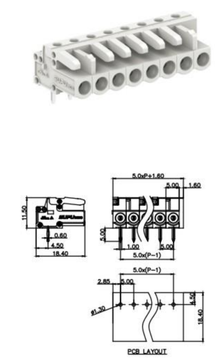

5.08mm间距孔型连接器 5.08mm Female connectors

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4581XX	2-24
4581XX/010	2-24
4506XX/030	2-24
4506XX/050	2-24

附件Accessory	
45897X	
4585XX	
450021	
450023	
450014	

4581XX

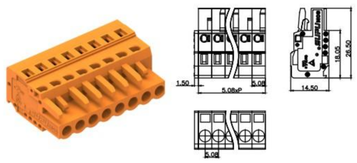

4581XX/010

带固定器with fixing flange



4581XX/030

带销钉with snap in mounting feet

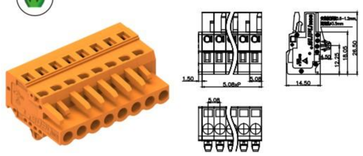

4581XX/050

带卡接钩with locking device

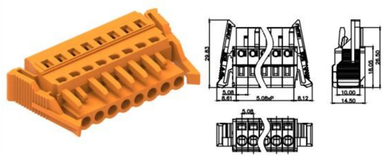

5.08mm间距焊针插座 5.08mm Solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4582XX	2-24
4582XX-01D	2-24
4583XX	2-24
4583XX-00D	2-24

附件Accessory	
450015	

4582XX

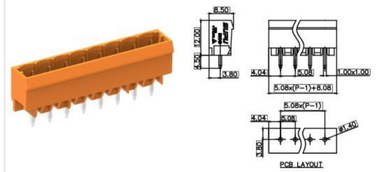

4582XX-01D

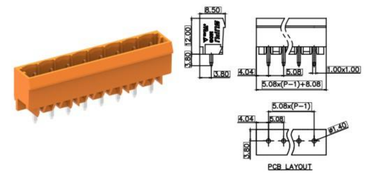

4583XX

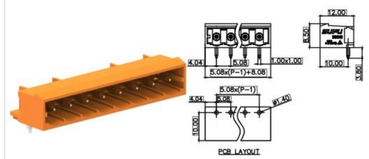

4583XX-00D



4583XX-04D



5.08mm间距针型连接器 5.08mm Male connector with spring-cage clamp

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4584XX	2-24
4584XX/010	2-24
4584XX/030	2-24
4584XX/060	2-24

附件Accessory	
45897X	
4585XX	
450021	
450023	
450014	

4584XX

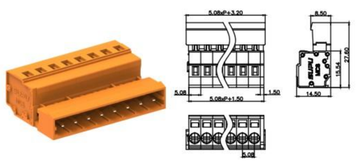

4584XX/010

带固定器with fixing flange



4584XX/030

带销钉with snap in mounting feet

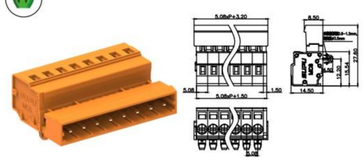

4584XX/060

带穿墙固定器with mounting ears

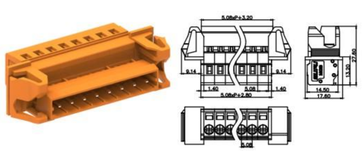

5.08mm间距孔型插头带焊针 5.08mm Female connector with spring-cage clamp with solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
45825X	2-24
45835X	2-24

附件Accessory	

45825X

直针型vertical solder pin

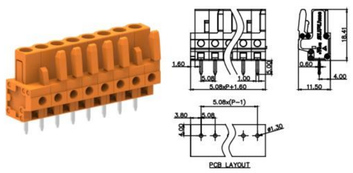

45835X

弯针型right angle solder pin

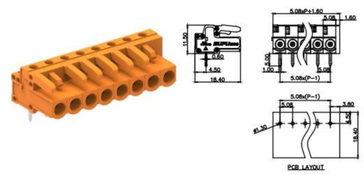

5.08mm间距穿墙式连接器 5.08mm Through-wall connector

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	320	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-12
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-12
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
45846X	2-24
45846X/010	2-24
45843X	2-24
45843X/010	2-24

附件Accessory	
45897X	
4585XX	
450021	
450023	
450014	

45846X

直针型vertical solder pin

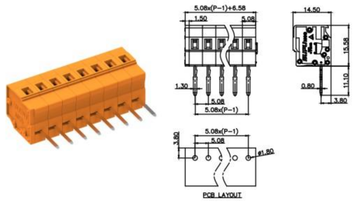

45846X/010

直针型带固定器
vertical solder pin with fixing flange

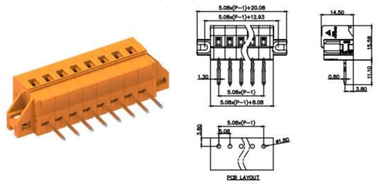

45843X

弯针型right angle solder pin

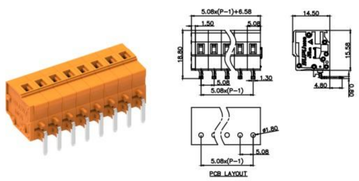

45843X/010

弯针型带固定器
right angle solder pin with fixing flange

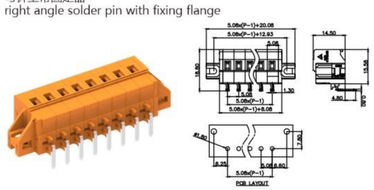

7.5mm间距孔型连接器 7.5mm Female connectors

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4751XX	2-24
4751XX/010	2-24
4751XX/030	2-24
4751XX/050	2-24

附件Accessory	
45097X	
4755XX	
450021	
450023	
450014	

4751XX



4751XX/010

带固定器with fixing flange

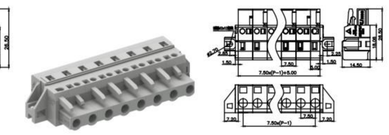

4751XX/030

带销钉with snap in mounting feet

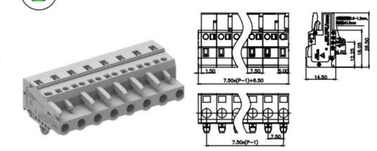

4751XX/050

带卡接钩with locking device



7.5mm间距焊针插座 7.5mm Solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4752XX	2-24
4752XX-03D	2-24
4752XX-04D	2-24
4752XX-05D	2-24

订货号/通道数 Order /Poles No.	
4752XX-06D	2-24
4753XX	2-24
4753XX-03D	2-24
4753XX-04D	2-24

4752XX



4507XX-03D



4752XX-04D



4753XX

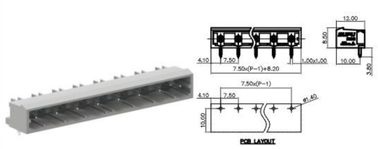

4753XX-03D

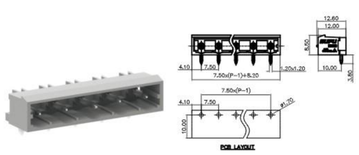

4753XX-04D



7.5mm间距焊针插座 7.5mm Solder pin

4752XX-05D



4752XX-06D

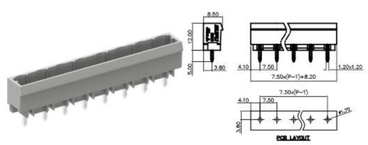

7.5mm间距针型连接器 7.5mm Male connector with spring-cage clamp

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4754XX	2-24
4754XX/010	2-24
4754XX/030	2-24
4754XX/060	2-24

附件Accessory	
45097X	
4755XX	
450021	
450023	
450014	

4754XX



4754XX/010

带固定器with fixing flange

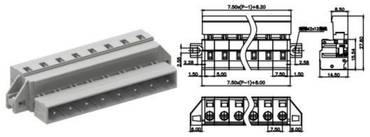

4754XX/030

带销钉with snap in mounting feet

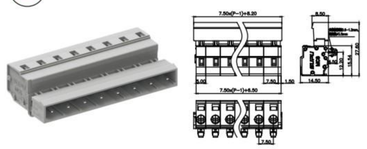

4754XX/060

带穿墙固定器with mounting ears



7.5mm间距孔型插头带焊针 7.5mm Female connector with spring-cage clamp with solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
47525X	2-24
47535X	2-24

附件Accessory	

47525X

直针型vertical solder pin

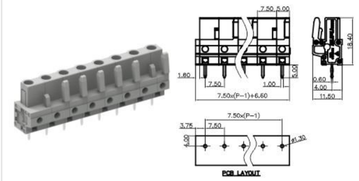

47535X

弯针型right angle solder pin

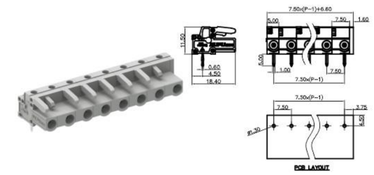

7.5mm间距穿墙式连接器.5mm Through-wall connector

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
47546X	2-24
47546X/010	2-24
47543X	2-24
47543X/010	2-24

附件Accessory	
45097X	
4755XX	
450021	
450023	
450014	

47546X

直针型vertical solder pin

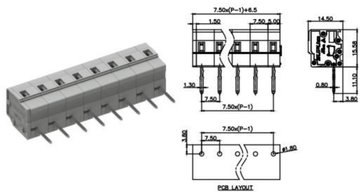

47546X/010

直针型带固定器
vertical solder pin with fixing flange

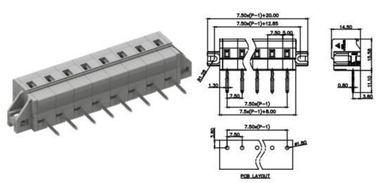

47543X

弯针型right angle solder pin

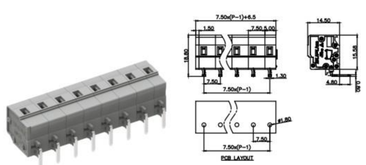

47543X/010

弯针型带固定器
right angle solder pin with fixing flange

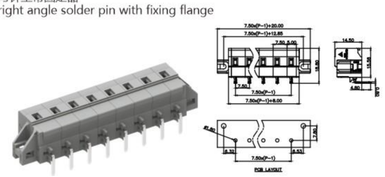

7.5mm间距孔型连接器(防错) 7.5mm Female connectors(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4756XX	2-24
4756XX/010	2-24
4756XX/030	2-24
4756XX/050	2-24

附件Accessory	
45097X	
4755XX	
450021	
450023	
450014	

4756XX

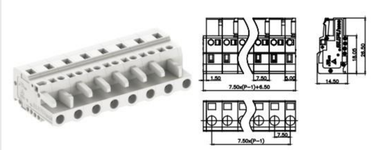

4756XX/010

带固定器with fixing flange

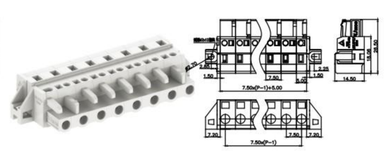

4756XX/030

带销钉with snap in mounting feet

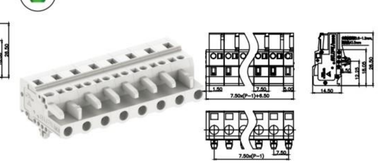

4756XX/050

带卡接钩with locking device

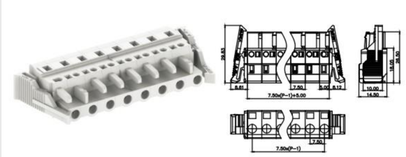

7.5mm间距焊针插座(防错) 7. 5mm Solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4757XX	2-24
4757XX-00D	2-24
4757XX-02D	2-24
4757XX-03D	2-24

订货号/通道数 Order /Poles No.	
4757XX-04D	2-24
4757XX-06D	2-24
4758XX-06D	2-24

4757XX



4757XX-00D



4757XX-02D



4757XX-06D

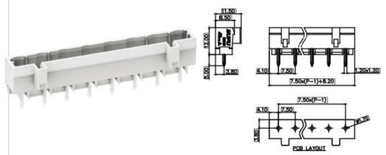

4758XX-06D

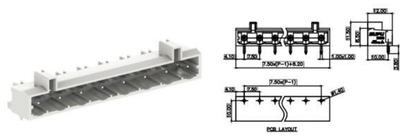

7.5mm间距焊针插座(防错) 7. 5mm Solder pin(protected against mismating)

附件Accessory	
475015	

4757XX-03D



4757XX-04D

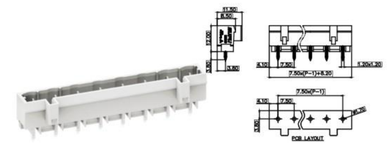

4757XX-05D

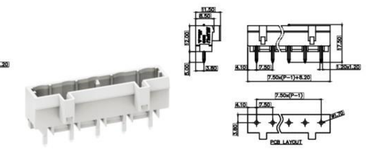

7.5mm间距针型连接器(防错) 7.5mm Male connector with spring-cage clamp(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4759XX	2-24
4759XX/010	2-24
4759XX/030	2-24
4759XX/060	2-24

附件Accessory	
45097X	
4755XX	
450021	
450023	
450014	

4759XX

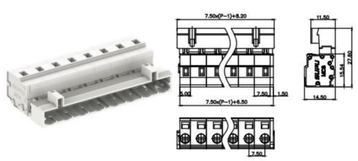

4759XX/010

带固定器with fixing flange



4759XX/030

带销钉with snap in mounting feet

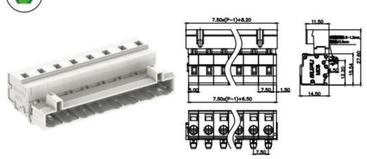

4759XX/060

带穿墙固定器with mounting ears

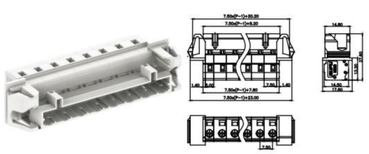

7.5mm间距孔型插头带焊针(防错) 7.5mm Female connector with spring-cage clamp with solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
47575X	2-24
47585X	2-24

附件Accessory	

47575X

直针型vertical solder pin

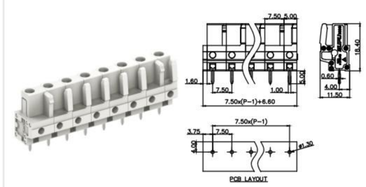

47585X

弯针型right angle solder pin

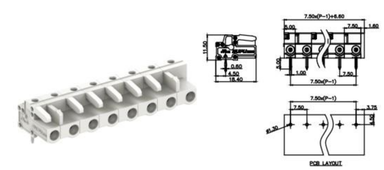

7.62mm间距孔型连接器 7.62mm Female connectors

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4781XX	2-24
4781XX/010	2-24
4781XX/030	2-24
4781XX/050	2-24

附件Accessory	
45897X	
450021	
450023	
450014	

4781XX

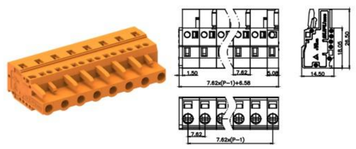

4781XX/010

带固定器with fixing flange

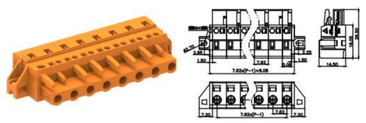

4781XX/030

带销钉with snap in mounting feet



4781XX/050

带卡接钩with locking device



7.62mm间距针型连接器 7.62mm Male connector with spring-cage clamp

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
4784XX	2-24
4784XX/010	2-24
4784XX/030	2-24
4784XX/060	2-24

附件Accessory	
45897X	
450021	
450023	
450014	

4784XX

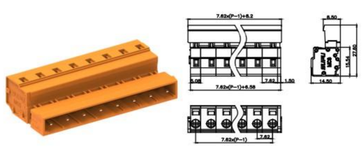

4784XX/010

带固定器with fixing flange

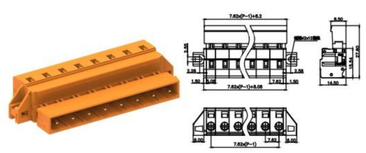

4784XX/030

带销钉with snap in mounting feet

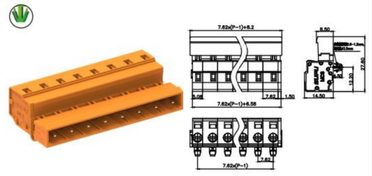

4784XX/060

带穿墙固定器with mounting ears



7.62mm间距焊针插座 7.62mm Solder pin

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	-	28-14
柔性导线截面积 Flexible	[mm²][AWG]	-	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4782XX	2-24
4782XX-04D	2-24
4782XX-06D	2-24
4783XX	2-24
4783XX-04D	2-24

附件Accessory	
475015	

4782XX



4782XX-04D



4782XX-06D



4783XX

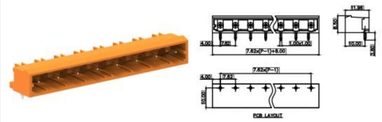

4783XX-04D



7.62mm间距穿墙式连接器 7.62mm Through-wall connector

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	16	15
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	28-14
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	28-14
额定冲击电压 Rated impulse voltage	[KV]	6.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	8-9

订货号/通道数 Order /Poles No.	
47846X	2-24
47846X/010	2-24
47843X	2-24
47843X/010	2-24

附件Accessory	
45897X	
450021	
450023	
450014	

47846X

直针型vertical solder pin

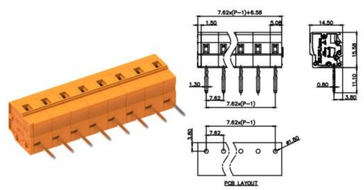

47846X/010

直针型带固定器
vertical solder pin with fixing flange

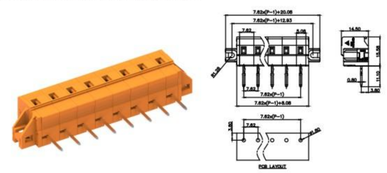

47843X

弯针型right angle solder pin

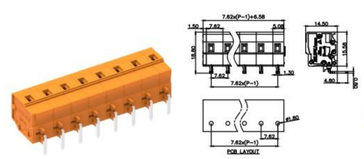

47843X/010

弯针型带固定器
right angle solder pin with fixing flange

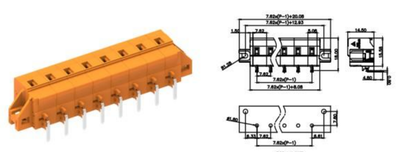

9.52mm间距 Pitch: 9.52mm

产品信息Product Information	
IEC数据 IEC Data	IEC
额定电流 Rated current [A]	32
额定电压 Rated voltage [V]	630
硬导线截面积 Conductor cross section solid [mm²]	0.5-4
紧固扭矩 Torque [N·m]	1.2

产品信息Product Information	
UL数据 UL Data	UL
额定电流(B/D) Rated current [A]	25/10
额定电压(B/D) Rated voltage [V]	300/300
导线截面积 Conductor cross section [AWG]	22-12
紧固扭矩 Torque [Lb·in]	10.53

产品信息Product Information	
绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	Ⅰ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.	
TB/B5-9.52VXXC-50-001	02-24
TB/B5-K-9.52VXXC-50-001	02-22

TB/B5-9.52VXXC-50-001

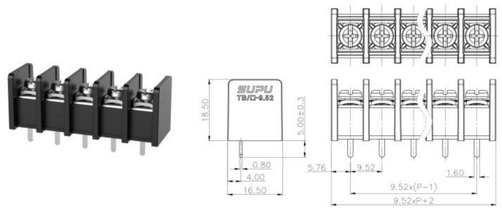

TB/B5-K-9.52VXXC-50-001

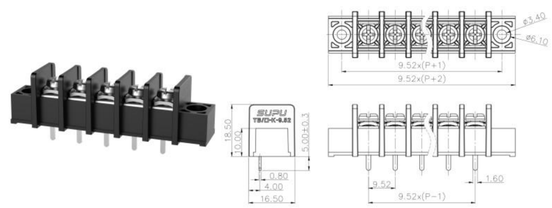

9.52mm间距 Pitch: 9.52mm

产品信息Product Information	
IEC数据 IEC Data	IEC
额定电流 Rated current [A]	32
额定电压 Rated voltage [V]	630
硬导线截面积 Conductor cross section solid [mm²]	0.5-4
紧固扭矩 Torque [N·m]	0.8

产品信息Product Information	
UL数据 UL Data	UL
额定电流(B/D) Rated current [A]	20/10
额定电压(B/D) Rated voltage [V]	300/300
导线截面积 Conductor cross section [AWG]	22-12
紧固扭矩 Torque [Lb·in]	7.02

产品信息Product Information	
绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	Ⅰ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.	
TB/B6-9.52VXXC-50-001	02-24
TB/B6-9.52HXXC-50-001	02-24

TB/B6-9.52VXXC-50-001

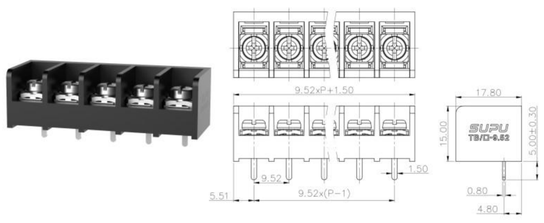

TB/B6-9.52HXXC-50-001

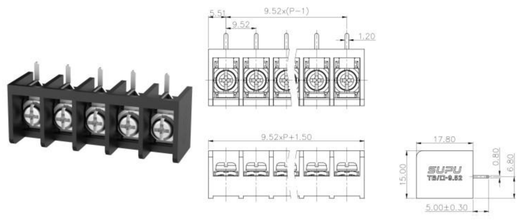

9.52mm间距 Pitch: 9.52mm

产品信息Product Information	
IEC数据 IEC Data	IEC
额定电流 Rated current [A]	32
额定电压 Rated voltage [V]	630
硬导线截面积 Conductor cross section solid [mm²]	0.5-4
紧固扭矩 Torque [N·m]	1.2

产品信息Product Information	
UL数据 UL Data	UL
额定电流(B/D) Rated current [A]	25/10
额定电压(B/D) Rated voltage [V]	300/300
导线截面积 Conductor cross section [AWG]	22-12
紧固扭矩 Torque [Lb·in]	10.53

产品信息Product Information	
绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	Ⅰ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.	
TB/W5-9.52VXXC-125-001	02-24
TB/W5-K-9.52VXXC-125-001	02-22

TB/W5-9.52VXXC-125-001

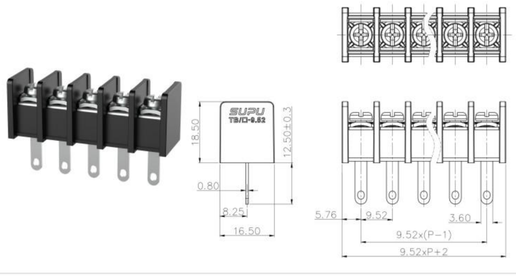

TB/W5-K-9.52VXXC-125-001

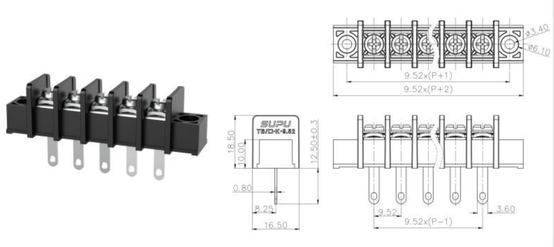

9.52mm间距 Pitch: 9.52mm

产品信息Product Information	
IEC数据 IEC Data	IEC
额定电流 Rated current [A]	32
额定电压 Rated voltage [V]	630
硬导线截面积 Conductor cross section solid [mm²]	0.5-4
紧固扭矩 Torque [N·m]	1.2

产品信息Product Information	
UL数据 UL Data	UL
额定电流(B/D) Rated current [A]	25/10
额定电压(B/D) Rated voltage [V]	300/300
导线截面积 Conductor cross section [AWG]	22-12
紧固扭矩 Torque [Lb·in]	10.53

产品信息Product Information	
绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	Ⅰ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.	
TB/C5-9.52VXXC-50-001	02-24
TB/C5-K-9.52VXXC-50-001	02-22
TB/C5-9.52HXXC-50-001	02-24
TB/C5-K-9.52HXXC-50-001	02-22

TB/C5-9.52VXXC-50-001

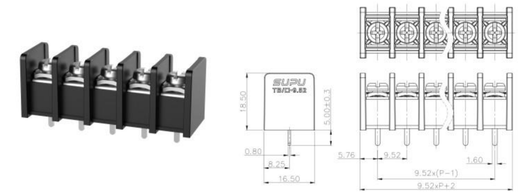

TB/C5-K-9.52VXXC-50-001

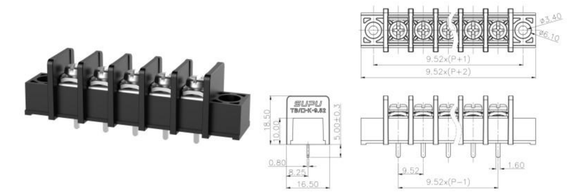

TB/C5-9.52HXXC-50-001

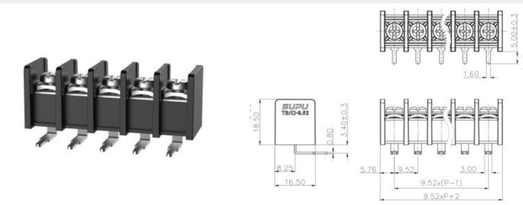

TB/C5-K-9.52HXXC-50-001

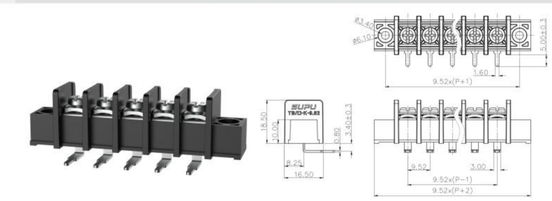

14.5mm间距 Pitch: 14.5mm

产品信息Product Information	
IEC数据 IEC Data	IEC
额定电流 Rated current [A]	76
额定电压 Rated voltage [V]	1000
硬导线截面积 Conductor cross section solid [mm²]	0.5-10
紧固扭矩 Torque [N·m]	2.5

产品信息Product Information	
UL数据 UL Data	UL
额定电流(B/D) Rated current [A]	50/50/10
额定电压(B/D) Rated voltage [V]	300/300/300
导线截面积 Conductor cross section [AWG]	22-8
紧固扭矩 Torque [Lb·in]	22.1

产品信息Product Information	
绝缘材料 Insulation material	PBT+GF
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.	
TBD-14.5VXXC-40-101	02-14

TBD-14.5VXXC-40-101

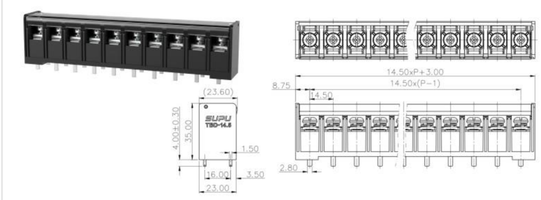

13.0mm间距 Pitch: 13.0mm

产品信息Product Information	
IEC数据 IEC Data	IEC
额定电流 Rated current [A]	40
额定电压 Rated voltage [V]	1000
硬导线截面积 Conductor cross section solid [mm²]	1.5-10
紧固扭矩 Torque [N·m]	1.2

产品信息Product Information	
UL数据 UL Data	UL
额定电流(B/C/D) Rated current [A]	40/40/5
额定电压(B/C/D) Rated voltage [V]	600/600/600
导线截面积 Conductor cross section [AWG]	22-8
紧固扭矩 Torque [Lb·in]	10.53

产品信息Product Information	
绝缘材料 Insulation material	PBT+GF
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.	
TB-K-13.0VXXC-001	02-15

TB-K-13.0VXXC-001

16.0mm间距 Pitch: 16.0mm

产品信息Product Information	
IEC数据 IEC Data	IEC
额定电流 Rated current [A]	75
额定电压 Rated voltage [V]	1000
硬导线截面积 Conductor cross section solid [mm²]	16-25
紧固扭矩 Torque [N·m]	5.0

产品信息Product Information	
UL数据 UL Data	UL
额定电流(B/C/D) Rated current [A]	75/75/5
额定电压(B/C/D) Rated voltage [V]	600/600/600
导线截面积 Conductor cross section [AWG]	22-4
紧固扭矩 Torque [Lb·in]	44.27

产品信息Product Information	
绝缘材料 Insulation material	PBT+GF
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.	
TB-K-16.0VXXC-001	01-15

TB-K-16.0VXXC-001

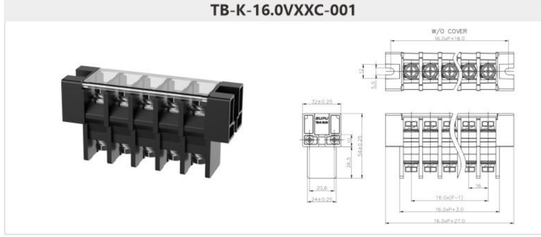

21.0mm间距 Pitch: 21.0mm

产品信息Product Information

IEC数据 IEC Data		IEC
额定电流 Rated current	[A]	100
额定电压 Rated voltage	[V]	1000
硬导线截面积 Conductor cross section solid	[mm²]	16-35
紧固扭矩 Torque	[N·m]	5.0

产品信息Product Information

UL数据 UL Data		UL
额定电流(B/C/D)Rated current	[A]	100/100/5
额定电压(B/C/D)Rated voltage	[V]	600/600/600
导线截面积 Conductor cross section	[AWG]	10-2
紧固扭矩 Torque	[Lb·in]	44.27

产品信息Product Information

绝缘材料 Insulation material	PBT+GF
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.

TB-K-21.0VXXC-001	01-15

TB-K-21.0VXXC-001

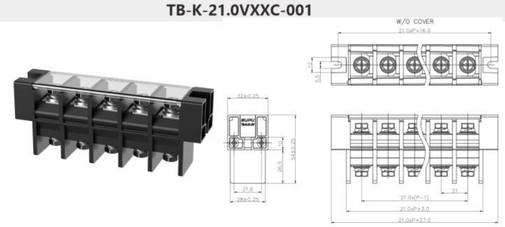

27.0mm间距 Pitch: 27.0mm

产品信息Product Information

IEC数据 IEC Data		IEC
额定电流 Rated current	[A]	192
额定电压 Rated voltage	[V]	1000
硬导线截面积 Conductor cross section solid	[mm²]	6-70
紧固扭矩 Torque	[N·m]	5.6

产品信息Product Information

UL数据 UL Data		UL
额定电流(B/C/D)Rated current	[A]	180/180/5
额定电压(B/C/D)Rated voltage	[V]	600/600/600
导线截面积 Conductor cross section	[AWG]	10-2/0
紧固扭矩 Torque	[Lb·in]	49.56

产品信息Product Information

绝缘材料 Insulation material	PBT+GF
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.

TB-K-27.0VXXC-001	01-15

TB-K-27.0VXXC-001

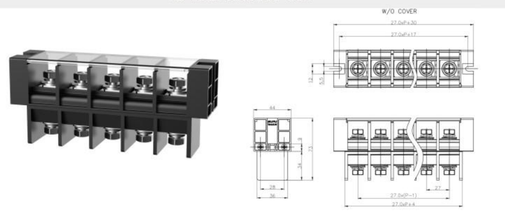

27.0mm间距 Pitch: 27.0mm

产品信息Product Information

IEC数据 IEC Data		IEC
额定电流 Rated current	[A]	192
额定电压 Rated voltage	[V]	1000
硬导线截面积 Conductor cross section solid	[mm²]	6-70
紧固扭矩 Torque	[N·m]	5.6

产品信息Product Information

UL数据 UL Data		UL
额定电流(B/C/D)Rated current	[A]	180/180/5
额定电压(B/C/D)Rated voltage	[V]	600/600/600
导线截面积 Conductor cross section	[AWG]	10-2/0
紧固扭矩 Torque	[Lb·in]	49.56

产品信息Product Information

绝缘材料 Insulation material	PBT+GF
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.

TB-K-27.0V02C-RD-002	02

TB-K-27.0V02C-RD-002

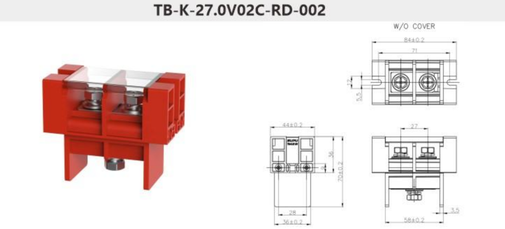

19.0mm间距 Pitch: 19.0mm

产品信息Product Information

IEC数据 IEC Data		IEC
额定电流 Rated current	[A]	101
额定电压 Rated voltage	[V]	1000
硬导线截面积 Conductor cross section solid	[mm²]	0.5-25
紧固扭矩 Torque	[N·m]	2.5

产品信息Product Information

UL数据 UL Data		UL
额定电流(B/C/D)Rated current	[A]	80/80/5
额定电压(B/C/D)Rated voltage	[V]	600/600/600
导线截面积 Conductor cross section	[AWG]	20-4
紧固扭矩 Torque	[Lb·in]	22.15

产品信息Product Information

绝缘材料 Insulation material	PC
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.

TBR80-XXC-LR-001	01-16
TBR80-XXC-B-001	01-16

TBR80-XXC-LR-001

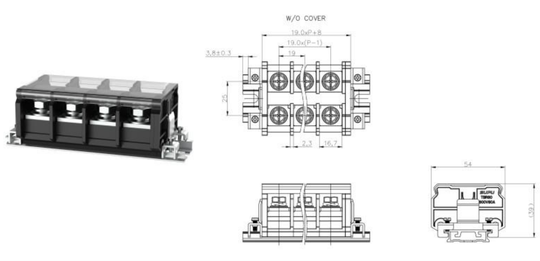

TBR80-XXC-B-001

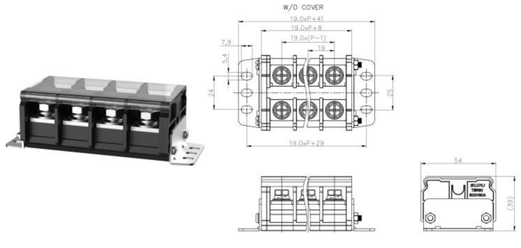

25.0mm间距 Pitch: 25.0mm

产品信息Product Information

IEC数据 IEC Data		IEC
额定电流 Rated current	[A]	101
额定电压 Rated voltage	[V]	1000
硬导线截面积 Conductor cross section solid	[mm²]	0.5-35
紧固扭矩 Torque	[N·m]	4.5

产品信息Product Information

UL数据 UL Data		UL
额定电流(B/C/D)Rated current	[A]	101/101/5
额定电压(B/C/D)Rated voltage	[V]	600/600/600
导线截面积 Conductor cross section	[AWG]	20-2
紧固扭矩 Torque	[Lb·in]	40

产品信息Product Information

绝缘材料 Insulation material	PC
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.

TBR100-XXC-LR-001	01-16
TBR100-XXC-B-001	01-16

TBR100-XXC-LR-001

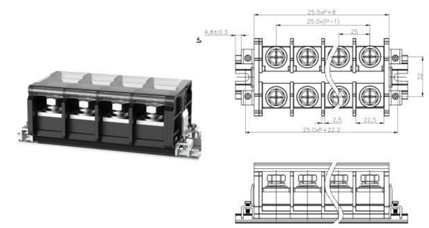

TBR100-XXC-B-001

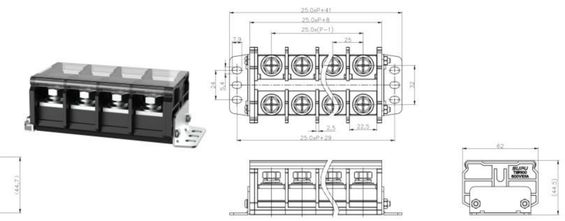

27.0mm间距 Pitch: 27.0mm

产品信息Product Information

IEC数据 IEC Data		IEC
额定电流 Rated current	[A]	150
额定电压 Rated voltage	[V]	1000
硬导线截面积 Conductor cross section solid	[mm²]	0.5-70
紧固扭矩 Torque	[N·m]	4.5

产品信息Product Information

UL数据 UL Data		UL
额定电流(B/C/D)Rated current	[A]	150/150/5
额定电压(B/C/D)Rated voltage	[V]	600/600/600
导线截面积 Conductor cross section	[AWG]	20-2/0
紧固扭矩 Torque	[Lb·in]	40

产品信息Product Information

绝缘材料 Insulation material	PC
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.

TBR150-XXC-LR-001	02-24
TBR150-XXC-B-001	02-22

TBR150-XXC-LR-001

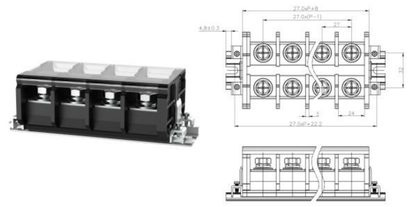

TBR150-XXC-B-001

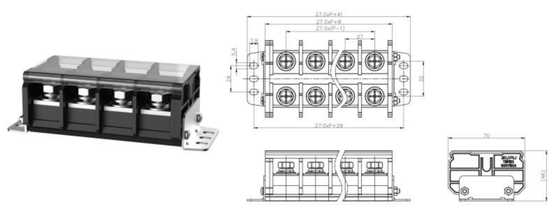

可拼接式中继端子 Splicable Adapter type fence terminal

产品信息Product Information

IEC数据 IEC Data		IEC
额定电流 Rated current	[A]	/
额定电压 Rated voltage	[V]	/
硬导线截面积 Conductor cross section solid	[mm²]	/
紧固扭矩 Torque	[N·m]	/

产品信息Product Information

UL数据 UL Data		UL
额定电流(B/C/D)Rated current	[A]	100/100/5
额定电压(B/C/D)Rated voltage	[V]	600/600/600
导线截面积 Conductor cross section	[AWG]	16-2
紧固扭矩 Torque	[Lb·in]	40

产品信息Product Information

绝缘材料 Insulation material	PC
绝缘材料组别 Insulation material group	Ⅲ
阻燃等级,符合UL94 Flame retardant grade,UL94 compliance	UL94 V-0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn plated

订货号/接线位数 Order No./Poles No.

TBR100-01P-GR-0002	02

TBR100-01P-GR-0002

冷压式连接器 Connectors with male/female furrule

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	-	-
额定电压 Rated voltage	[V]	600	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
BL635VXXF-WT-0000	2-5
BL635VXXF-WT-0000	6-15
BL635VXXM-WT-0000	2-5
BL635VXXM-WT-0000	6-15

附件Accessory	
B05010001	

BL635VXXF-WT-0000 单排 | **BL635VXXF-WT-0000 三排** | **BL635VXXM-WT-0000 单排** | **BL635VXXM-WT-0000 三排**

公端/Male 公端/Male 母端/Female 母端/Female

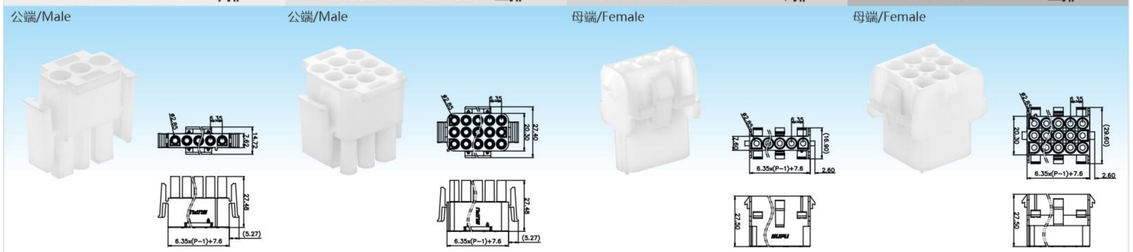

PCB焊板式连接器 Connector PCB type

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	-
额定电压 Rated voltage	[V]	600	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
BP635VXXM-WT-0000	2-5
BP635VXXM-WT-0000	6-15
BP635VXXF-WT-0000	2-5
BP635VXXF-WT-0000	6-15

附件Accessory	
B05010002	

BP635VXXM-WT-0000 单排 | **BP635VXXM-WT-0000 三排** | **BP635VXXF-WT-0000 单排** | **BP635VXXF-WT-0000 三排**

母端, 针/Female, Pin 母端, 针/Female, Pin 母端, 孔/Female, Hole 母端, 孔/Female, Hole

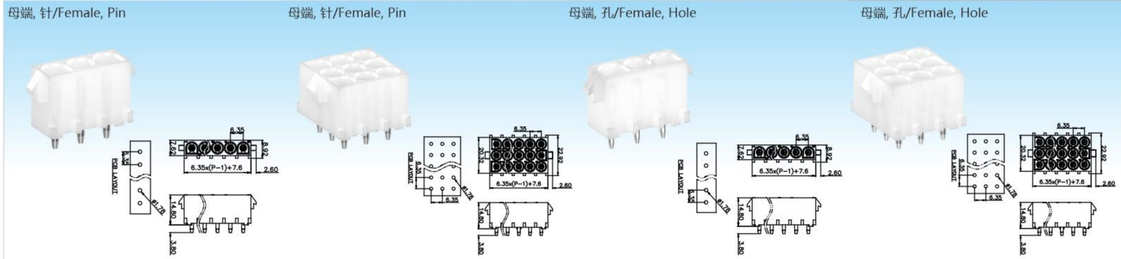

冷压式金属件 Cold pressed metal parts

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	-
额定电压 Rated voltage	[V]	600	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	0.5-2.0	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	12	-
额定电压 Rated voltage	[V]	600	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.8	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-

BL635V30M-03-2000 | **BL635V30F-03-2000** | **BL635V30M-03-0800** | **BL635V30F-03-0800**

针/Pin 孔/Hole 针/Pin 孔/Hole

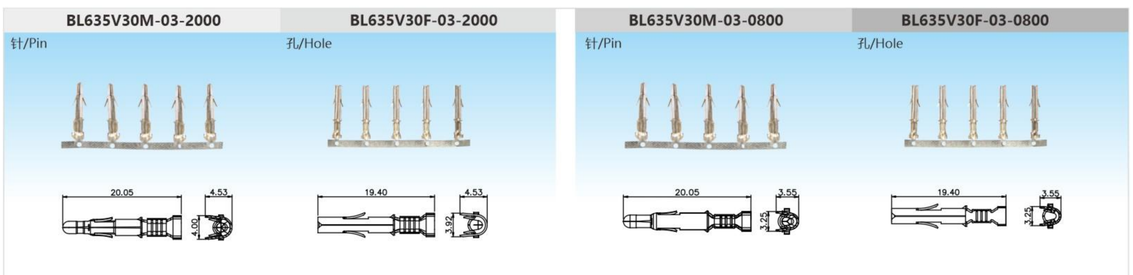

冷压式安全回路防错连接器 Connectors with circuit protected against mismating

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	-	-
额定电压 Rated voltage	[V]	600	-
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-
锁线螺钉 Locking crew		-	
扭矩 Torque	[N·m]	-	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	-	

附件Accessory	
B05010001	

订货号/通道数 Order /Poles No.			
BL635V34F-WT-0000-XX	12	BL635V34M-WT-0000-XX	12

公端/Male 母端/Female

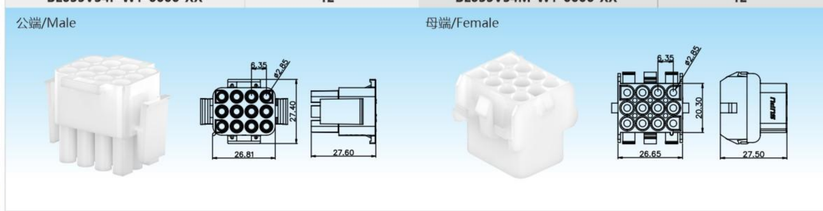

B系列冷压式安全回路防错孔型连接器（含11种防错）
11 Poles products (protected against mismating)structure diagram

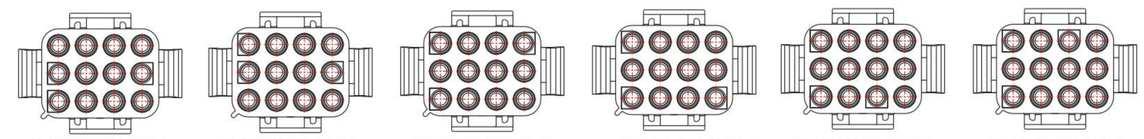

BL635V34F-WT-0000-1 BL635V34F-WT-0000-2 BL635V34F-WT-0000-3 BL635V34F-WT-0000-4 BL635V34F-WT-0000-5 BL635V34F-WT-0000-6

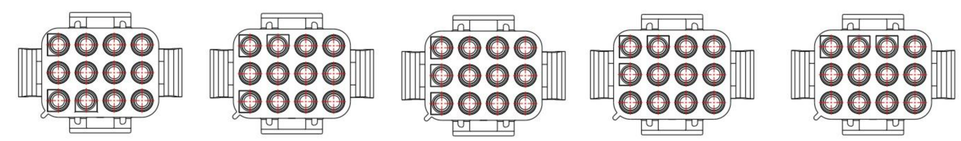

BL635V34F-WT-0000-7 BL635V34F-WT-0000-8 BL635V34F-WT-0000-9 BL635V34F-WT-0000-10 BL635V34F-WT-0000-11

防错结构孔型
Female connectors
(protected against mismating)

B系列冷压式安全回路防错针型连接器（含11种防错）
11 Poles products (protected against mismating)structure diagram

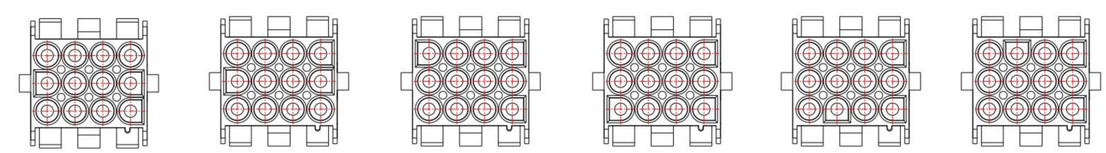

BL635V34M-WT-0000-1 BL635V34M-WT-0000-2 BL635V34M-WT-0000-3 BL635V34M-WT-0000-4 BL635V34M-WT-0000-5 BL635V34M-WT-0000-6

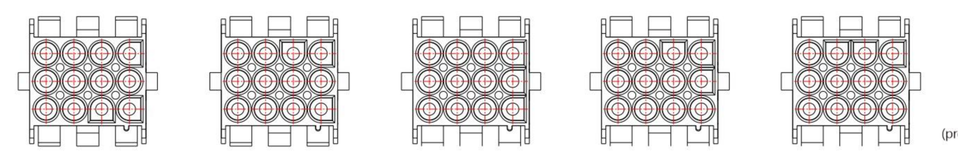

BL635V34M-WT-0000-7 BL635V34M-WT-0000-8 BL635V34M-WT-0000-9 BL635V34M-WT-0000-10 BL635V34M-WT-0000-11

防错结构针型
Male connector
(protected against mismating)

B05010001
防错柱
Protected against mismating
适用于BP/BL420、BP/BL635系列产品
Apply for BP/BL420、BP/BL635 connectors

B05010002
防错柱
Protected against mismating
适用于BP/BL420、BP/BL635系列产品
Apply for BP/BL420、BP/BL635 connectors

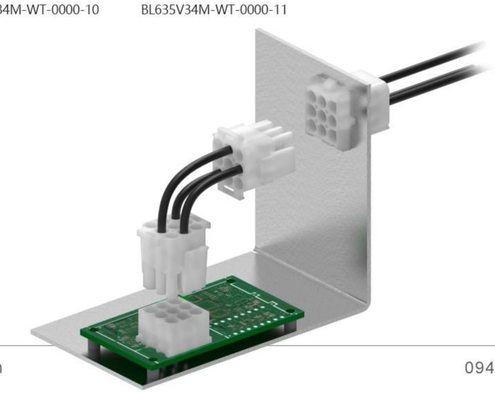

SUP系列变压器专用端子 SUP series transformer terminal block

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	600
硬导线截面积 Solid	[mm²][AWG]	0.5-4.0	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.5-4.0	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M4	
扭矩 Torque	[N·m]	1.2	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620111	灰色Gray	1
620112	橙色Orange	1



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	24	20
额定电压 Rated voltage	[V]	600	600
硬导线截面积 Solid	[mm²][AWG]	0.5-2.5	24-14
柔性导线截面积Flexible	[mm²][AWG]	0.5-2.5	24-14
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3.5	
扭矩 Torque	[N·m]	0.8	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620121	灰色Gray	2
620122	橙色Orange	2



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	600	600
硬导线截面积 Solid	[mm²][AWG]	0.5-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.5-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3.5	
扭矩 Torque	[N·m]	0.8	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620151	灰色Gray	1
620152	橙色Orange	1





产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	600
硬导线截面积 Solid	[mm²][AWG]	0.5-4.0	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.5-4.0	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M4	
扭矩 Torque	[N·m]	1.2	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620171	灰色Gray	1
620172	橙色Orange	1



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	600
硬导线截面积 Solid	[mm²][AWG]	0.5-2.5	24-14
柔性导线截面积Flexible	[mm²][AWG]	0.5-2.5	24-14
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3	
扭矩 Torque	[N·m]	0.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620181	灰色Gray	2
620182	橙色Orange	2



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	600	600
硬导线截面积 Solid	[mm²][AWG]	0.5-2.5	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.5-2.5	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3.5	
扭矩 Torque	[N·m]	0.8	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620161	灰色Gray	1
620162	橙色Orange	1



TRS系列变压器专用端子 TRS series transformer terminal block

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3	
扭矩 Torque	[N·m]	0.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620211	灰色Gray	1
620212	橙色Orange	1
620213	绿色Green	1
620217	黄绿色Yellow green	1



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3	
扭矩 Torque	[N·m]	0.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620221	灰色Gray	2
620222	橙色Orange	2
620223	绿色Green	2
620227	黄绿色Yellow green	2



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3	
扭矩 Torque	[N·m]	0.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620231	灰色Gray	3
620232	橙色Orange	3
620233	绿色Green	3
620237	黄绿色Yellow green	3



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	600	300
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3	
扭矩 Torque	[N·m]	0.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620251	灰色Gray	1
620252	橙色Orange	1
620253	绿色Green	1
620257	黄绿色Yellow green	1



产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	57	65
额定电压 Rated voltage	[V]	750	300
硬导线截面积 Solid	[mm²][AWG]	4.0-10.0	12-6
柔性导线截面积Flexible	[mm²][AWG]	4.0-10.0	12-6
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M4	
扭矩 Torque	[N·m]	1.2	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620521	灰色Gray	2
620522	橙色Orange	2





产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	57	65
额定电压 Rated voltage	[V]	750	300
硬导线截面积 Solid	[mm²][AWG]	4.0-10.0	12-6
柔性导线截面积Flexible	[mm²][AWG]	4.0-10.0	12-6
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M4	
扭矩 Torque	[N·m]	1.2	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620531	灰色Gray	3
620532	橙色Orange	3



TRS系列变压器专用端子 TRS series transformer terminal block

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	600	600
硬导线截面积 Solid	[mm²][AWG]	0.2-4.0	24-12
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	24-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3	
扭矩 Torque	[N·m]	0.6-0.8	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620261	灰色Gray	1
620262	橙色Orange	1

TRST系列变压器专用端子 TRST series transformer terminal block

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	300
硬导线截面积 Solid	[mm²][AWG]	0.5-4.0	20-12
柔性导线截面积Flexible	[mm²][AWG]	0.5-4.0	20-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3.5	
扭矩 Torque	[N·m]	0.8	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620411	灰色Gray	1
620412	橙色Orange	1

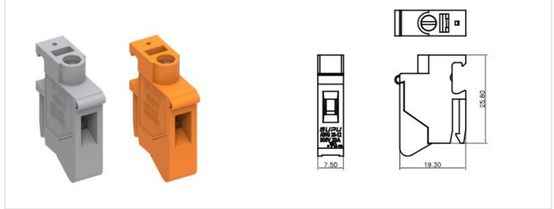

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	300
硬导线截面积 Solid	[mm²][AWG]	0.5-4.0	20-12
柔性导线截面积Flexible	[mm²][AWG]	0.5-4.0	20-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3.5	
扭矩 Torque	[N·m]	0.8	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620421	灰色Gray	2
620422	橙色Orange	2

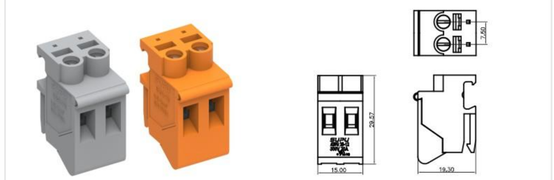

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	32	20
额定电压 Rated voltage	[V]	600	300
硬导线截面积 Solid	[mm²][AWG]	0.5-4.0	20-12
柔性导线截面积Flexible	[mm²][AWG]	0.5-4.0	20-12
额定冲击电压 Rated impulse voltage	[KV]	3.0	-
锁线螺钉 Locking crew		M3.5	
扭矩 Torque	[N·m]	0.8	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-9	

订货号/颜色/通道数 Order /Colour/Poles No.		
620611	灰色Gray	1
620612	橙色Orange	1

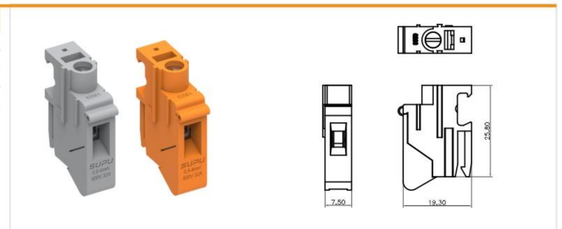

导线截面积和直径之间对应关系表 The corresponding relation between mm² and AWG

导线截面积 Wire area mm²	最大导体的理论直径Theoretical diameter						
	公制Metric			AWG/kcmil			
	硬线Solid		软线Flexible wire mm	硬线Solid			软线Flexible wire mm
	实心线Solid wire mm	多股线Stranded wire mm		规格 specification	实心线Solid wire mm	多股线Stranded wire mm	
0.2	0.51	0.53	0.61	24	0.54	0.61	0.64
0.34	0.63	0.66	0.8	22	0.68	0.71	0.80
0.5	0.9	1.1	1.1	20	0.85	0.97	1.02
0.75	1	1.2	1.3	18	1.07	1.23	1.28
1.0	1.2	1.4	1.5	-	-	-	-
1.5	1.5	1.7	1.8	16	1.35	1.55	1.6
2.5	1.9	2.2	2.3	14	1.71	1.95	2.08
4	2.4	2.7	2.9	12	2.15	2.45	2.7
6	2.9	3.3	3.9	10	2.72	3.09	3.36
10	3.7	4.2	5.1	8	3.43	3.89	4.32
16	4.6	5.3	6.3	6	4.32	4.91	5.73
25	-	6.6	7.8	4	5.45	6.18	7.26
35	-	7.9	9.2	2	6.87	7.78	9.02

导线类型 Wire Type

s: 实心线/Solid wire
f: 柔性线/Flexible wire
s+f-st: 实心线和柔性线/Solid wire and flexible wire
sol: 实心线/Solid wire
f-st: 柔性线/Flexible wire

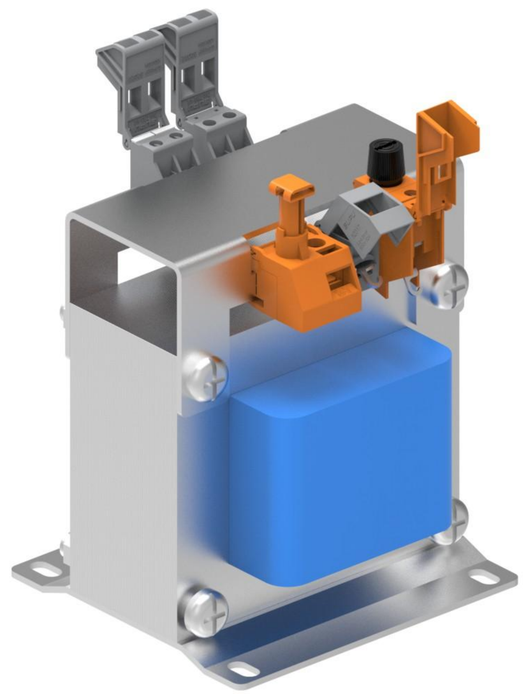

SCW4系列穿墙端子 SCWH4 series panel feed-through terminal blockSeries PCB terminal block

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	41	30
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.2-6.0	24-10
柔性导线截面积Flexible	[mm²][AWG]	0.2-4.0	24-10
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		M3	
扭矩 Torque	[N·m]	0.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	8-10	
附件Accessory			
SCWH4-F	306801		
TJB8.2-XX			

订货号/通道数 Order /Poles No.

SCWH4	2	SCWH4S	2



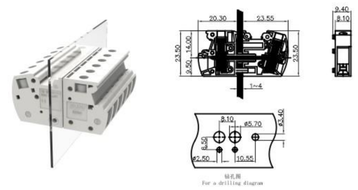

SCW10系列穿墙端子 SCWH10 series panel feed-through terminal blockSeries PCB terminal block

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	76	65
额定电压 Rated voltage	[V]	500	300
硬导线截面积 Solid	[mm²][AWG]	0.5-16	20-6
柔性导线截面积Flexible	[mm²][AWG]	0.5-16	20-6
额定冲击电压 Rated impulse voltage	[KV]	6.0	-
锁线螺钉 Locking crew		M4	
扭矩 Torque	[N·m]	1.2	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	10-12	
附件Accessory			
SCWH10-F	TMB10.2-10		
TJB10.2-XX			

订货号/通道数 Order /Poles No.

SCWH10	2	SCWH10S	2





SCW16系列穿墙端子 SCWH16 series panel feed-through terminal blockSeries PCB terminal block

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	76	30
额定电压 Rated voltage	[V]	800	300
硬导线截面积 Solid	[mm²][AWG]	6-25	24-10
柔性导线截面积Flexible	[mm²][AWG]	6-16	24-10
额定冲击电压 Rated impulse voltage	[KV]	8.0	-
锁线螺钉 Locking crew		M5	
扭矩 Torque	[N·m]	0.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	16	
附件Accessory			
SCWH16-F	TMB10.2-10		

订货号/通道数 Order /Poles No.

SCWH16	2	SCWH16S	2





SCW25系列穿墙端子 SCWH25 series panel feed-through terminal blockSeries PCB terminal block

产品信息Product Information

IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	101	112.5
额定电压 Rated voltage	[V]	800	600
硬导线截面积 Solid	[mm²][AWG]	6-35	10-2
柔性导线截面积Flexible	[mm²][AWG]	10-25	10-2
额定冲击电压 Rated impulse voltage	[KV]	8.0	-
锁线螺钉 Locking crew		M5	
扭矩 Torque	[N·m]	2.5-4.5	
固定螺钉 Fixed screw		-	
扭矩 Torque	[N·m]	-	
剥线长度 Strip length	[mm]	18-20	
附件Accessory			
SCWH25-F	TMB10.2-10		

订货号/通道数 Order /Poles No.

SCWH25	2	SCWH25S	2

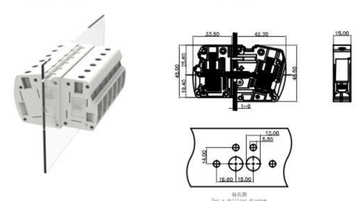



组装端子块 Forming terminal blocks

1.卡紧
Snap-mounting
① 您可以将订货号尾部为S的端子相互插接在一起，
或者与订货号尾部不带S的端子插装在一起。
The terminals designated with S can be snapped together with each other (or with terminals without S)



具体开孔尺寸请详见产品规格书
Please refer to the product specification for the s, ...ic size of the hole

2.侧端固定片（法兰板）
Flange plates
② 可以在侧面安装侧端固定片
通过旋紧侧端固定片上的螺钉而将端子块固定于仪器壳体上。
At the sides,you can snap on flange plates.
You can use the flange connection to attach terminal block to the housing panel.



订货号规则/Order number rule

XXX	XXX	X	X	X	XX
外侧接线方式 Outside wiring method 弹簧Spring cage/SPW 螺钉Screw fastener/SCW 螺栓Screw bolt/BSW	内侧接线方式 Inside wiring method 与外侧相同Same as outside/null 扁平快插Fatplug in/SCM 焊接Solding/SL	接线方向 Wiring direction 水平Horizontal/H 垂直Vertical/V	接线容量 Wire capacity 4MM²/4 10MM²/10 16MM²/16 25MM²/25 50MM²/50 95MM²/95	是否带柱 With post 带柱if Yes/null 不带柱if no/S	颜色 Colour 灰色Gray/GY 橙色Orange/OG 蓝色Blue/BU 红色Red/RD 黄色Yellow/YE 黑色Black/BK 绿色Green/CN 白灰色Light gry/null

举例 example
SCWH4解释为（外侧接线为螺钉接线，内侧接线与外侧相同，接线方向为水平接线，接线容量为4mm²，带柱子白灰色
SCWH4 means : Both the outside and inside are screw fastener connection , horizontal wiring, wire capacity is 4mm2, with post . white colour .

插拔式端子附件 Pluggable terminal block accessory

护线板Protection plate	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	MC-GW5.08-9.9	5.08mm	9.9mm	2-4	MC-RB5.0/5.08系列
	MC-GW5.08-19.9	5.08mm	19.9mm	5-8	MC-RB5.0/5.08系列
	MC-GW5.08-39.9	5.08mm	39.9mm	9-24	MC-RB5.0/5.08系列

护线盒Relief housing	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	MC-WG5.0-2	5.0mm	10mm	2	MC-RB5.0/5.08系列
	MC-WG5.0-3	5.0mm	15mm	3	MC-RB5.0/5.08系列

跨接桥Jumper	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	MC-JP3.81-X	3.81mm	-	2-6	MC-RA/RE/RF/RJ/RAF3.81系列
	MC-JP5.0-X	5.0mm	-	2-6	MC-RB/RE/RJ5.08系列 MC-RB/RE/RBF5.08系列

防错插片 Coding profile	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	MC-R-MSTB	-	-	-	MC-RB/RE/RJ5.08系列 MC-RB/RE/RBF5.08系列
	MC-P-MSTB	-	-	-	MC-PA/RE/RJ5.08系列 MC-PC/RB/RE/RBF5.08系列
	MC-R-RH7.62	-	-	-	MC-RHH/PH/PHH/RQ7.62系列 MC-RHH/PH10.16系列
	MC-R-PA2.5	2.5mm	-	-	MC-PA2.5系列
	MC-CQ5.08-XX	5.08m	-	2-24	MC-PB5.08HXXC-F-0001系列
	MC-GW5.08-10.1	5.08m	-	-	MC-RB5.08HXXB-D系列
	MC-JT5.0	5.0m	-	-	MC-ROX5.0/7.5-0002系列
	MC-QX5.0	5.08m	-	-	MC-RB5.08HXXB-D系列

MCS连接器附件 MCS connector accessory

护线板Protection plate	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	435XXX/100	3.5mm	6mm 12.5mm 25mm 35mm	2-3 4-6 7-9 10-12	MCS435针/孔连接器系列 MCS435 female/male series
	438XXX/100	3.81mm			MCS438针/孔连接器系列 MCS438 female/male series
	450XXX/100	5.0mm	11.5mm 20mm 30mm 50mm	2-3 4-6 7-9 10-12	MCS450针/孔连接器系列 MCS450 female/male series
	458XXX/100	5.08mm			MCS458针/孔连接器系列 MCS458 female/male series
	475XXX/100	7.5mm			MCS475针/孔连接器系列 MCS475 female/male series

注：护线板可在工厂安装也可自行安装,该类更多产品信息请电话咨询！ Note:Factory installation or self installation with Protection plate,For more information, please call us directly

护线盒Relief housing	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	43555X	3.5mm	-	2-6,12	MCS435针/孔连接器系列 MCS435 female/male series
	4505XX	5.0mm	-	2-12	MCS450针/孔连接器系列 MCS450 female/male series
	4585XX	5.08mm	-	2-12	MCS458针/孔连接器系列 MCS458 female/male series
	47550X	7.5mm	-	2 3 7	MCS475针/孔连接器系列 MCS475 female/male series

跨接桥Jumper	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
 450绝缘型相邻跨接桥 Sp450 Insulated type adjacent jumper	450012	5.0mm	-	2	MCS450针/孔连接器系列 MCS450 female/male series
 绝缘型2插脚梳状跨接桥 2 way insulation comb jumper	225332	5.0mm	-	2	MCS450针/孔连接器系列 MCS450 female/male series
 绝缘型3插脚梳状跨接桥 3 way insulation comb jumper	225333	5.0mm	-	3	MCS450针/孔连接器系列 MCS450 female/male series

导轨转换器Rail transfer	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	450018	-	-	-	MCS450/475连接器系列 MCS450 /475 series

附件 Accessory

拨码元件Coding key	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	435015	3.5/3.81mm	-	-	MCS435/438系列带焊针插座的连接器 MCS435/ 438 header with solder pins
	450015	5.0/5.08mm	-	-	MCS450/458系列带焊针插座的连接器 MCS450/ 458 header with solder pins
	475015	7.5/7.62mm	-	-	MCS475/478系列带焊针插座的连接器 MCS475/ 478 header with solder pins

标记字符 Marked Numbers

打印字符描述 Description of marked numbers	产品 Product	正面打印字符 Front side marking	双面字符打印型号 Two-side marking 孔型 Female type	针型 Male type
1 2 3 4 ... 23 24		/001	/006	/007
1 2 ...⊕... 23 24		/002	/008	/009

打印字符描述 Description of marked numbers	产品 Product	正面打印字符 Front side marking	双面字符打印型号 Two-side marking 孔型 Female type	针型 Male type
1 2 3 4 ... 23 24		/003	–	–
1 2 ... ⊕ ... 23 24		/004	–	–

可按客户要求打印字符，下表字符打印在原定货号后加后缀。
For more product information, please contact us! Can mark according to customer's request. The number in the below list can be added following the original order No. /005按客户要求而定 According to customers' request.

大电流穿墙端子附件 Panel feed-through terminal block with high current accessory

法兰板Flange plates	订货号Order NO.	间距Pitch	厚度Compatibility	通道数Poles No.	匹配型号Apply ID
	SCWH4-F		3mm		SCWH10S
	SCWH10-F		3mm		SCWH10S
法兰板，适用于带安装销型穿墙端子 Flange plates,apply for feed-through terminal with mounting pin	SCWH16-F		3mm		SCWH16S
	SCWH25-F		4mm		SCWH25S

标记牌Marker card	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	306801	8.1mm	-	-	SCWH4/SCWH4S
	TMB10.2-10	10.1mm	-	-	SCWH10/SCWH10S
	TMB10.2-10	12mm	-	-	SCWH16/SCWH16S
	TMB10.2-10	15mm	-	-	SCWH25/SCWH25S

跨接桥Jumper	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	TJB8.2-2.....TJB8.2-10	-	-	2-10	SCWH4/SCWH4S
	TJB10.2-2....TJB10.2-10	-	-	2-10	SCWH10/SCWH10S

变压器专用端子附件 Transformer terminal blocks accessory

变压器固定器Transformer End stop	订货号Order NO.	间距Pitch	宽度Width	通道数Poles No.	匹配型号Apply ID
	620301	-	-	-	MCS450 /475 series Transformer terminal blocks

变压器标记牌Transformer Marker card

此端子标记牌适用于端子排垂直放置，每片6条，每条顺序排列10个数字，用于SP620系列端子的标记。
This marker card is applied for terminal strip placed vertically, 6 lines in each piece, and 10 ordered numbers in 1 line, used for marking SP620 connectors.

如需指定特殊字符打印，请咨询销售工程师，谢谢！
If special print needed, please contact our sales manager. Thanks.

每片内容 Printed on each piece	订货号 Order NO.	每包数量(片) Number in each pack(piece)
1...10 (10x)	620801/301	5
11...20 (10x)	620801/302	5
21...30 (10x)	620801/303	5
...	...	...
91...100 (10x)	620801/310	5
1...50 (2x)	620801/401	5
51...100 (2x)	620801/402	5
SP620空白标记排 blank marker card	620801	

弹簧接线端子专用工具 Special tools for spring terminal blocks

简易连线工具Easy connect tool	订货号Order NO.	间距Pitch	通道数Poles No.	匹配型号Apply ID
 简易连线工具(金属) Easy connect tool (metal)	435013	-	-	MCS435、438针/孔连接器系列 MCS435、438 female/male series
	450021			MCS450、458、475、478针/孔连接器系列 MCS450、458、475、478 female/male series
 新型简易连线工具(金属) Easy connect tool (metal)	450023	-	-	MCS450、458、475、478针/孔连接器系列 MCS450、458、475、478 female/male series
 简易连线工具 Easy connect tool	450014	-	–	MCS450、475针/孔连接器系列 MCS450、475 female/male series

插棒connect bar	规格说明Description	间距Pitch	订货号Order NO.
	1A型单脚插棒 1A type 1 way connect bar	5.0	910111
	2A型双脚插棒 2A type 2 way connect bar	5.0	910112
	10A型十脚插棒10 way connect bar	5.0	910120

一字螺丝刀 Screwdriver			刀口 Edge	订货号Order NO.
			2.5x0.4mm	910024
			3.5x0.5mm	910025
			5.5x0.8mm	910026